

Printview: Male connector; with CAGE CLAMP® connection and feedthrough flanges; for screw or similar mounting types; for parallel or perpendicular mounting; Pin spacing 5 mm / 0.197 in; 8-pole - Item No.: 769-608/004-000



Male connector; with CAGE CLAMP® connection and feedthrough flanges; for screw or similar mounting types; for parallel or perpendicular mounting; Pin spacing 5 mm / 0.197 in; 8-pole

Item No.: 769-608/004-000



Male connector; with CAGE CLAMP® connection and feedthrough flanges; for screw or similar mounting types; for parallel or perpendicular mounting; Pin spacing 5 mm / 0.197 in; 8-pole

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	769-608/004-000
GTIN / EAN	4044918521406
Content	1
Order amount	25
Customer item number	

Notes

Technical data

Miscellaneous


Packaging type	BOX
Rated voltage (III / 3) [V]	500 [V]
Rated impulse voltage (III / 3) [kV]	6 [kV]
Rated current [A]	32 [A]

Printview: Male connector; with CAGE CLAMP® connection and feedthrough flanges; for screw or similar mounting types; for parallel or perpendicular mounting; Pin spacing 5 mm / 0.197 in; 8-pole - Item No.: 769-608/004-000


Technical data	
<i>Total number of potentials</i>	8
<i>Type of wiring</i>	<i>Front-entry wiring</i>
<i>Connection technology</i>	<i>CAGE CLAMP®</i>
<i>Number of connection points connector</i>	1
<i>Actuation type</i>	<i>Operating tool</i>
<i>Connectable conductor materials</i>	<i>Copper</i>
<i>Nominal cross section</i>	<i>4 mm²</i>
<i>Solid conductor</i>	<i>0.08 ... 4 mm² / 28 ... 12 AWG</i>
<i>Fine-stranded conductor</i>	<i>0.08 ... 4 mm² / 28 ... 12 AWG</i>
<i>Strip length</i>	<i>8 ... 9 mm / 0.31 ... 0.35 Inch</i>
<i>Pin spacing</i>	<i>5 mm / 0.197 in</i>
<i>Width</i>	<i>54.7 mm / 2.154 Inch</i>
<i>Height from the surface</i>	<i>18.3 mm / 0.72 Inch</i>
<i>Depth</i>	<i>40.2 mm / 1.583 Inch</i>
<i>No. of poles</i>	8
<i>Mounting type</i>	<i>Mounting flange</i>
<i>Contact type (pluggable connector)</i>	<i>Male connector/plug</i>
<i>Connector connection type</i>	<i>for conductors</i>
<i>Total number of connection points</i>	8
<i>Color</i>	<i>gray</i>
<i>Insulating material</i>	<i>Polyamide 66 (PA 66)</i>
<i>Fire load [MJ]</i>	<i>0.504 [MJ]</i>
<i>RoHS Conformity</i>	1
<i>Weight [g]</i>	<i>24.445 [g]</i>

Printview: Male connector; with CAGE CLAMP® connection and feedthrough flanges; for screw or similar mounting types; for parallel or perpendicular mounting; Pin spacing 5 mm / 0.197 in; 8-pole - Item No.: 769-608/004-000

Images & drawings

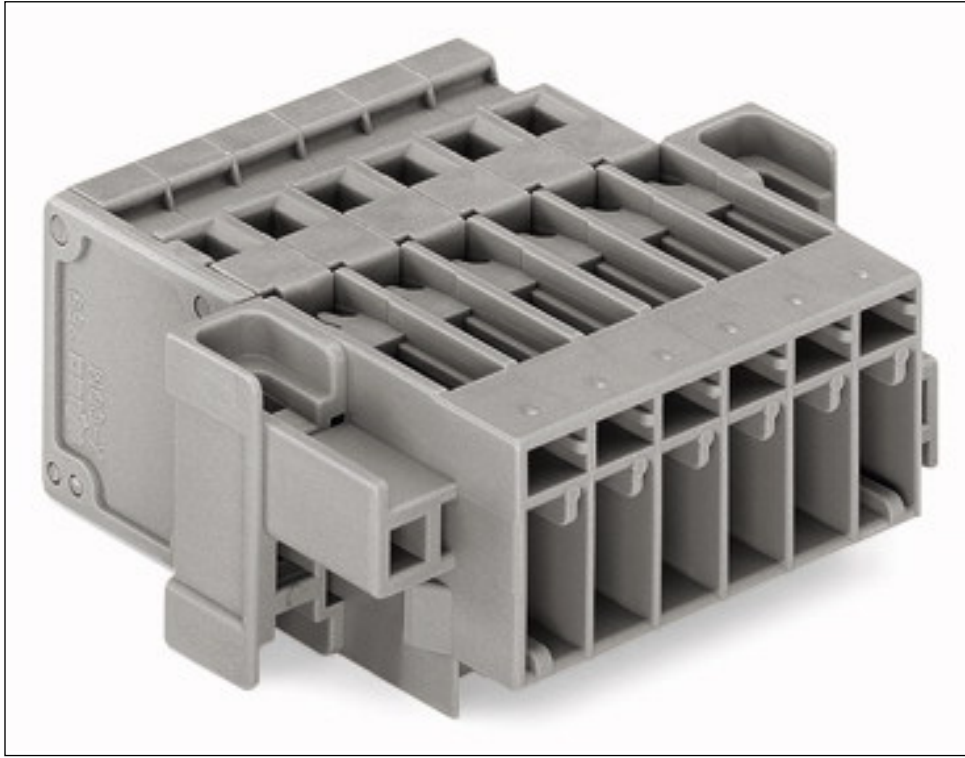

Printview: Male connector; with CAGE CLAMP® connection and feedthrough flanges; for screw or similar mounting types; for parallel or perpendicular mounting; Pin spacing 5 mm / 0.197 in; 8-pole - Item No.: 769-608/004-000

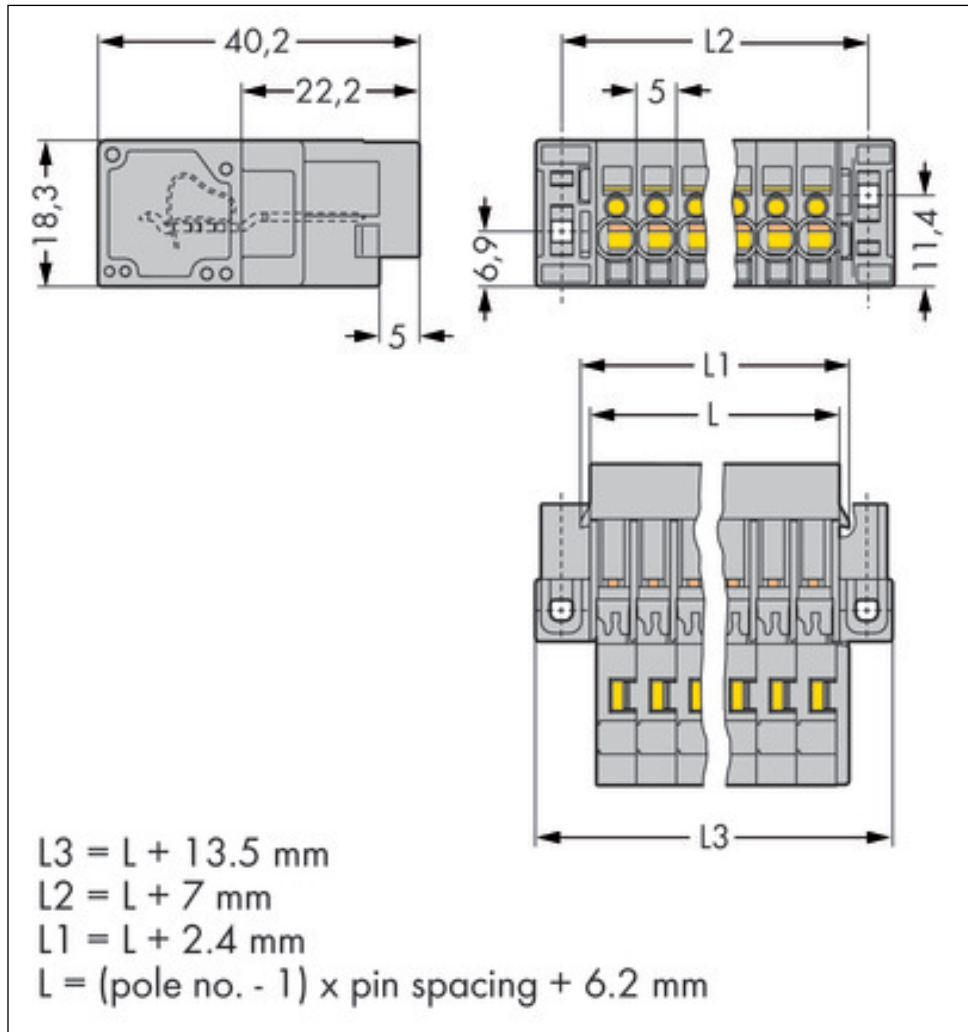

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.