

Data sheet Product SLY 9 SMD 055 4 Z



PCB connectors>Male headers

□ 0.5 mm




Features

pitch:	2.00 mm
no. of contacts:	4
contact material:	CuSn-alloy
surface of contact:	tin-plated
surface contact / contact sleeve:	• Ni+≥0.2µm Au • Ni+4...6µm Sn
version:	male header
volume resistance:	≤5 mΩ
nominal current:	3 A
nominal voltage:	100 V DC
test voltage:	500 V
insulating body material:	PA 4.6. GF
temperature range:	• -40°C... +163°C • (260°C/10 s)
class of inflammability:	UL 94 V-0
specific insulation resistance:	>10 ⁷ Ω·m
connection type:	SMD
reflow solderable:	yes

packing (optional):

pick and place pad and bar magazine

Technical Drawing

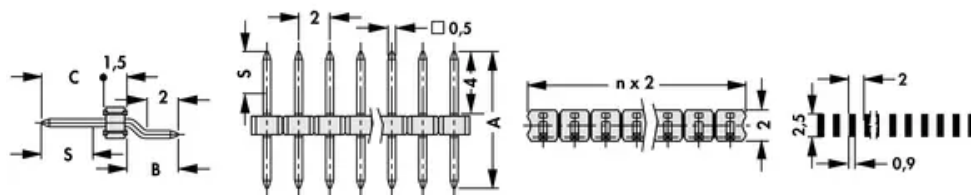





A: 10.3 mm

B: 3.3 mm

C: 5.5 mm

S: 3.5 mm

Equipping



SLY 9 SMD ... B SM

Fischer Elektronik GmbH & Co. KG
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
58511 Lüdenscheid

Telefon +49 2351 435-0
Telefax +49 2351 45754

info@fischerelektronik.de
www.fischerelektronik.de