



MATERIAL&FINISH


Insulator Material: PBT, UL 94V-0
 Contact Material: Brass
 Current Rating : 1A AC,DC
 Contact Resistance: 20mΩ Max.
 Dielectric Withstanding: AC 500V
 Insulator Resistance: 1000MΩ Min.
 Operating Temp.: -20°C~+105°C
 Voltage Rating : 250V AC,DC

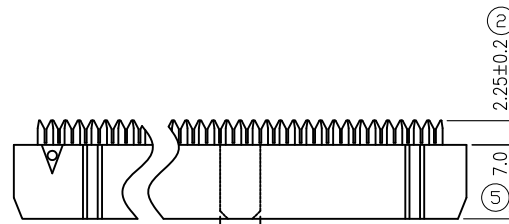


一般型端子

977-11-xx $\frac{3}{1}$ $\frac{3}{2}$ $\frac{0}{3}$ $\frac{R}{4}$ $\frac{5}{5}$

- No. of contacts per row
- 3: With Bump(GP)
2: Without Bump
- 3: With SR
2: Without SR
- 0: Selective;Black Insulator
- Pinrex internal code.

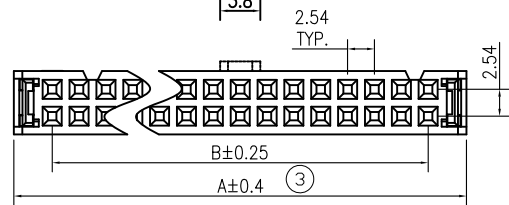

14P-64P 双槽

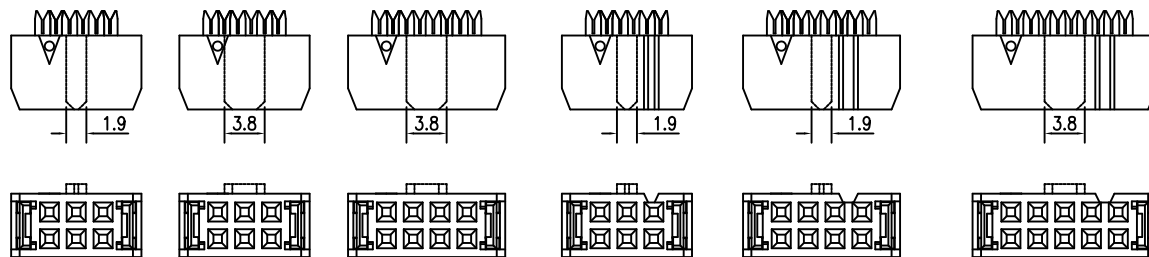

6P 小鼻/无槽 6P 大鼻/无槽 8P 大鼻/无槽 6P 小鼻/单槽 8P 小鼻/单槽 10P-12P 单槽

NUMBER OF POSITIONS	DIMENSION			NUMBER OF POSITIONS	DIMENSION		
	A	B	C		A	B	C
06	12.32	5.08	小1.9/大3.8	26	37.72	30.48	3.8
08	14.86	7.62	小1.9/大3.8	30	42.80	35.56	3.8
10	17.40	10.16	3.8	34	47.88	40.64	3.8
12	19.94	12.70	3.8	36	50.42	43.18	3.8
14	22.48	15.24	3.8	40	55.50	48.26	3.8
16	25.02	17.78	3.8	44	60.58	53.34	3.8
18	27.56	20.32	3.8	50	68.20	60.96	3.8
20	30.10	22.86	3.8	60	80.90	73.66	3.8
22	32.64	25.40	3.8	64	85.98	78.74	3.8
24	35.18	27.94	3.8				

		TOLERANCE		OLD PART NO.		TITLE	
		.0 =±.20		DRAWER 罗苗苗		IDC SOCKET 2.54mm	
		.00 =±.15		CHECK 李剑		频锐科技股份有限公司 PINREX ENTERPRISE CO., LTD	
		.000 =±.XXX		APP'D 李剑			
A	RELEASE	2024/06/03		SCALE NONE	SIZE A4	NEW PART NO.	DRAW NO.
REV.	DESCRIPTION	DATE				977-11-xx330R	977-11-xx330R
		ANG.=±3'		SHEET 1 OF 1			