

Han L32 HPR-Compact-HTE2-HC-SCL-M40

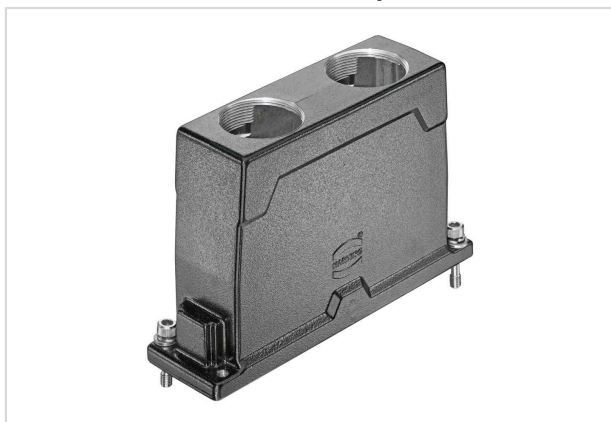


Image is for illustration purposes only. Please refer to product description.

Part number	19 40 532 0423
Specification	Han L32 HPR-Compact-HTE2-HC-SCL-M40
HARTING eCatalogue	https://harting.com/19405320423

Identification

Category	Hoods / Housings
Series of hoods/housings	Han® HPR Compact
Type of hood/housing	Hood
Type	High construction

Version

Size	L32 B
Version	Top entry
Number of cable entries	2
Cable entry	2x M40
Locking type	Screw locking
Field of application	Hoods/housings for harsh outdoor environments

Technical characteristics

Tightening torque (screw locking)	4 Nm
Limiting temperature	-40 ... +125 °C
Note on the limiting temperature	For use as a connector according to IEC 61984.
Degree of protection acc. to IEC 60529	IP66 IP68 IP69

Material properties

Material (hood/housing)	Aluminium die-cast Corrosion resistant
-------------------------	---



Pushing Performance
Since 1945

Material properties

Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (locking)	Stainless steel
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Not contained

Specifications and approvals

Approvals	CE
-----------	----

Commercial data

Packaging size	1
Net weight	0.71 kg
Country of origin	India
European customs tariff number	85389099
GTIN	5713140327665
eCl@ss	27440202 Shell for industrial connectors
ETIM	EC000437
UNSPSC 24.0	39121466