

Data sheet

236-753

**MODULAR PCB TERMINAL BLOCK 2 SOLDER PINS / POLE
PIN SPACING 7.5/7.62 MM / 0.3 IN FRONT-/SIDE-ENTRY CAGE CLAMP
CONNECTION**



Technical data

Package size 400 4*100 pieces.

Pin spacing from	7.5 mm
Pin spacing up to	7.62 mm
Pin spacing from	0.295 in
Pin spacing up to	0.3 in
pole count	1
Cross section from [mm ²]	0.08 mm ²
Cross section to [mm ²]	2.5 mm ²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Voltage UL	300 V
Voltage CSA	300 V
Current UL	15 A
Current CSA	15 A
Measured voltage EN	400 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	16 A
Measured voltage EN	800 V
Measured shock voltage	6 kV
Pollution degree	2
Current intensity EN	16 A
Weight	1.067 g
Color	light grey

Data sheet

236-753

MODULAR PCB TERMINAL BLOCK 2 SOLDER PINS / POLE PIN SPACING 7.5/7.62 MM / 0.3 IN FRONT-/SIDE-ENTRY CAGE CLAMP CONNECTION

Wiring type	Front-/Side-entry
No. of connection Points	1
No. of potentials	1
Height	13 mm
Height	0.512 in
Width	7.5 mm
Width	0.295 in
Depth	14 mm
Depth	0.551 in
Strip length from	5 mm
Strip length to	6 mm
Strip length	0.22 in

xxx-xxx/332-000

with 2 solder pins/pole and 5,5 mm long solder pins

Data sheet

236-753

**MODULAR PCB TERMINAL BLOCK 2 SOLDER PINS / POLE
PIN SPACING 7.5/7.62 MM / 0.3 IN FRONT-/SIDE-ENTRY CAGE CLAMP
CONNECTION**

Approval	Voltage	Current	Approval number	Notes
BBJ	400	16	B/12/697/03	
BV	800/400	16	11915/A0	
CCA	400	16	DK2082	
CSA	300	15	18677-10	
CSM	400	16	017956	
DEMKO	400	16	98-04355	
DNV	400	16	E6998	
GL	800/400	16	17296-00HH	
KEMA	380	16	83.6970.01/02	
RMR	400	16	99.00007.250	
RosTesT	400	16	B09523	
SEMKO	400		9411003	
UL	300	15	E45172	

Data sheet

236-753

MODULAR PCB TERMINAL BLOCK 2 SOLDER PINS / POLE PIN SPACING 7.5/7.62 MM / 0.3 IN FRONT-/SIDE-ENTRY CAGE CLAMP CONNECTION

Accessories

Item number

END PLATE 1 MM / 0.039 IN THICK

236-300

Jumper GDS RM 5mm

Jumper PCB
Spacing 5mm

Jumper GDS RM 7,5mm

Jumper PCB
Spacing 7.5mm

OPERATING STICKER FOR PCB TERMINAL BLOCKS

210-191

OPERATING TOOL FITTED FOR SERIES 264, 280, 281

209-130

OPERATING TOOL PLASTICS

236-332

Profile PCB 236, 255, 256

Profile PCB 236,
255, 256

Profile PCB 257, 736, 737, 738

Profile PCB 257,
736, 737, 738

SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN

210-257

SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN

210-258

SCREWDRIVER Type 2, bar (3,5 x 0,5) mm

210-120

SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm

210-620

SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN
SPACING 7.5MM

249-171

SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN
SPACING 7.5MM

249-170/236-704

SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN
SPACING 7.62 MM

249-173


SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN
SPACING 7.62 MM

249-172/236-708

Data sheet

236-753

**MODULAR PCB TERMINAL BLOCK 2 SOLDER PINS / POLE
PIN SPACING 7.5/7.62 MM / 0.3 IN FRONT-/SIDE-ENTRY CAGE CLAMP
CONNECTION**

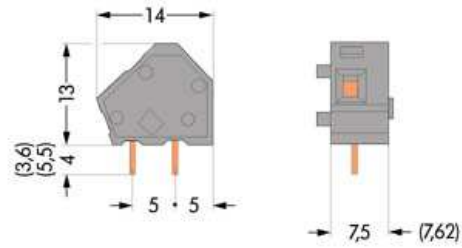

Data sheet

236-753

**MODULAR PCB TERMINAL BLOCK 2 SOLDER PINS / POLE
PIN SPACING 7.5/7.62 MM / 0.3 IN FRONT-/SIDE-ENTRY CAGE CLAMP
CONNECTION**

Diameter of drilled hole: $1,1^{+0,1}$ mm