

Ferrule - Al 0,75- 8 GY S1 - 1200105

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Taped ferrules, 0.75 mm², sleeve length 8 mm, with plastic collar, according to DIN 46228-4, gray, for processing with the CRIMPFOX 4 IN 1, 10 strips each with 50 sleeves per strip.



Key Commercial Data

Packing unit	1 STK
Minimum order quantity	500 STK
Weight per Piece (excluding packing)	0.08 g
Custom tariff number	85369010
Country of origin	Germany

Technical data

Dimensions

Length (b)	14 mm
Maximum stripping length	11 mm
Sleeve length	8 mm
Inner dimension of the insulating collar (d)	2.8 mm
Ferrule diameter	1.3 mm
Insulating collar thickness	0.25 mm
Sleeve wall thickness	0.15 mm

Ambient conditions

Short-term temperature	120 °C
Max. permanent temperature	105 °C

General

Color	gray
-------	------

Ferrule - Al 0,75- 8 GY S1 - 1200105

Technical data

General


Components	free from silicone and halogen
Flammability rating according to UL 94	HB
Material	E-CU
Coating	tin-plated (galvanic)

Standards and Regulations

Flammability rating according to UL 94	HB
--	----

Drawings

Dimensional drawing

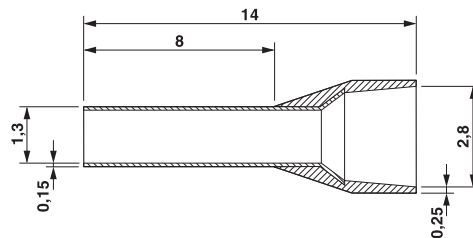

Classifications

eCl@ss

eCl@ss 5.1	27400201
eCl@ss 6.0	27400201
eCl@ss 8.0	27400201
eCl@ss 9.0	27400201

ETIM

ETIM 4.0	EC000005
ETIM 5.0	EC000005

Approvals

Approvals

Approvals

CSA

Ferrule - AI 0,75- 8 GY S1 - 1200105

Approvals

Ex Approvals

Approvals submitted

Approval details



Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>