


Data sheet Product LAM 3 D K 100 5



Cooling aggregates>Miniature cooling aggregates


30 x 60.5 mm, with axial fan

- compact design
- homogeneous heat distribution
- mounting possible on any side
- powerful axial-fan motor
- other lengths, special designs and machinings according to customer's specifications
- other surfaces, fan types and fan voltages upon request

Features

width:	60.5 mm
height:	30 mm
length:	100 mm
thermal resistance:	1.35 - 0.98 K/W
operating voltage of the fan motor:	• 5 V DC • 12 V DC
surface:	natural colour anodised

Technical Drawing

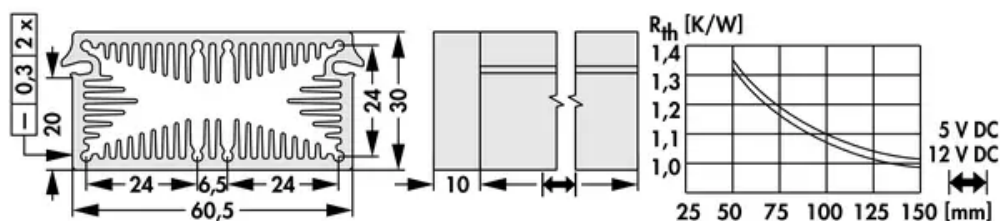

Fan

type:	Sepa, MFB 30 G 05
dimensions:	30x30x10 mm

tension:	5 V DC
max. air volume:	6.8 m³/h
cur. consumpt.:	120 mA
temperature range:	-10°C ... +80°C
noise level:	25 dB(A)
speed:	8,500 min⁻¹
weight:	8 g
failure rate (L ₁₀):	L₁₀ > 40.000 h (40°C) MFBF > 350.000 h (40°C)
type:	Sepa, MFB 30 G 12
dimensions:	30x30x10 mm
tension:	12 V DC
max. air volume:	7.7 m³/h
cur. consumpt.:	60 mA
temperature range:	-10°C ... +85°C
noise level:	26 dB(A)
speed:	9,100 min⁻¹
weight:	8 g
failure rate (L ₁₀):	L₁₀ > 40.000 h (40°C) MFBF > 350.000 h (40°C)