

YLUX013XQA

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type ALSR200
Cable length 700 mm
Operation temperature -40°C to +85°C



YLUX013XQB

DC~6GHz SMA male to SMA female cable

Compliant


RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type ALSR200
Cable length 700 mm
Operation temperature -40°C to +85°C

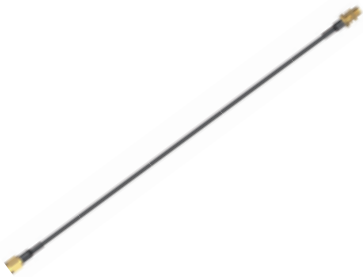

YLUX013XQC

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type ALSR200
Cable length 700 mm
Operation temperature -40°C to +85°C



YLUX013XQD

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type ALSR200
Cable length 1700 mm
Operation temperature -40°C to +85°C



YLUX013XQE

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type ALSR200
Cable length 1700 mm
Operation temperature -40°C to +85°C



YLUX013XQF

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALSR200

Cable length

1700 mm

Operation temperature

-40°C to +85°C



YLUX013XQG

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALSR200

Cable length

2700 mm

Operation temperature

-40°C to +85°C



YLUX013XQH

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALSR200

Cable length

2700 mm

Operation temperature

-40°C to +85°C



YLUX013XQJ

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALSR200

Cable length

2700 mm

Operation temperature

-40°C to +85°C



YLUX013XQK

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type


ALSR200

Cable length

4700 mm

Operation temperature

-40°C to +85°C

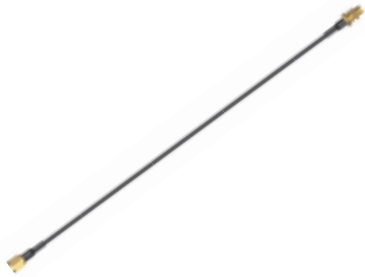

YLUX013XQL

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type ALSR200
Cable length 4700 mm
Operation temperature -40°C to +85°C



YLUX013XQM

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type ALSR200
Cable length 4700 mm
Operation temperature -40°C to +85°C



YLUX013XQN

DC~2GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-2000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type RG174
Cable length 700 mm
Operation temperature -40°C to +85°C



YLUX013XQP

DC~2GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-2000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type RG174
Cable length 1700 mm
Operation temperature -40°C to +85°C



YLUX013XQQ

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-2000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type RG174
Cable length 2700 mm
Operation temperature -40°C to +85°C



YLUX013XQR

DC~2GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-2000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

RG174

Cable length

4700 mm

Operation temperature

-40°C to +85°C



YLUX016XQA

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALS302

Cable length

700 mm

Operation temperature

-40°C to +85°C



YLUX016XQB

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALS302

Cable length

700 mm

Operation temperature

-40°C to +85°C



YLUX016XQC

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALS302

Cable length

700 mm

Operation temperature

-40°C to +85°C



YLUX016XQD

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type


ALS302

Cable length

1700 mm

Operation temperature

-40°C to +85°C

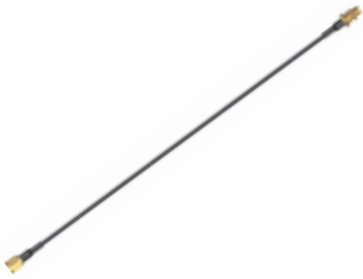

YLUX016XQE

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type


ALS302

Cable length

1700 mm

Operation temperature

-40°C to +85°C

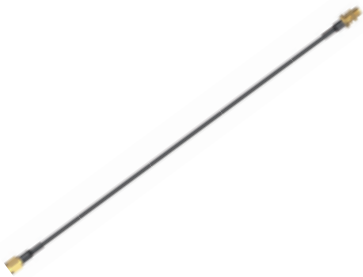

YLUX016XQF

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type


ALS302

Cable length

1700 mm

Operation temperature

-40°C to +85°C

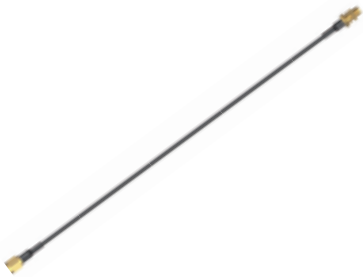

YLUX016XQG

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALS302

Cable length

2700 mm

Operation temperature

-40°C to +85°C



YLUX016XQH

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALS302

Cable length

2700 mm

Operation temperature

-40°C to +85°C



YLUX016XQJ

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALS302

Cable length

2700 mm

Operation temperature

-40°C to +85°C



YLUX016XQK

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALS302

Cable length

4700 mm

Operation temperature

-40°C to +85°C



YLUX016XQL

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALS302

Cable length

4700 mm

Operation temperature

-40°C to +85°C



YLUX016XQM

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALS302

Cable length

4700 mm

Operation temperature

-40°C to +85°C



YLUX017XQA

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

RG405

Cable length

700 mm

Operation temperature

-40°C to +85°C



YLUX017XQB

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type


RG405

Cable length

700 mm

Operation temperature

-40°C to +85°C

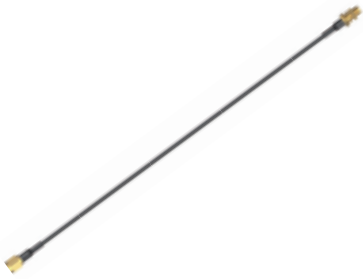

YLUX017XQC

DC~6GHz SMA male to SMA female cable

Compliant


RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type RG405
Cable length 700 mm
Operation temperature -40°C to +85°C

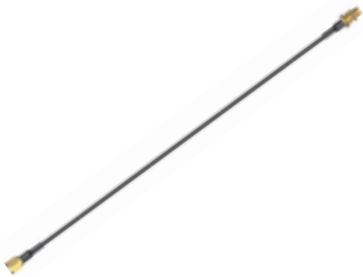

YLUX017XQD

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type RG405
Cable length 1700 mm
Operation temperature -40°C to +85°C



YLUX017XQE

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type RG405
Cable length 1700 mm
Operation temperature -40°C to +85°C



YLUX017XQF

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type RG405
Cable length 1700 mm
Operation temperature -40°C to +85°C



YLUX017XQG

DC~6GHz SMA male to SMA female cable

Compliant


RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type RG405
Cable length 2700 mm
Operation temperature -40°C to +85°C

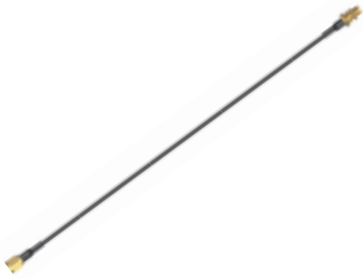

YLUX017XQH

DC~6GHz SMA male to SMA female cable

Compliant


RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type RG405
Cable length 2700 mm
Operation temperature -40°C to +85°C

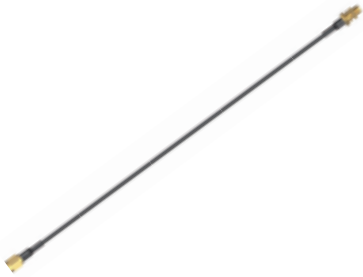

YLUX017XQJ

DC~6GHz SMA male to SMA female cable

Compliant


RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type RG405
Cable length 2700 mm
Operation temperature -40°C to +85°C

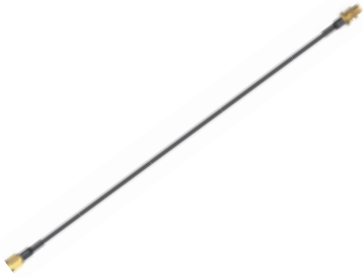

YLUX017XQK

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type RG405
Cable length 4700 mm
Operation temperature -40°C to +85°C



YLUX017XQL

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type RG405
Cable length 4700 mm
Operation temperature -40°C to +85°C



YLUX017XQM

DC~6GHz SMA male to SMA female cable

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1 SMA male
Connector type2 SMA female
Cable type RG405
Cable length 4700 mm
Operation temperature -40°C to +85°C