

Small Signal Product

**500mW High Speed SMD Switching Diode**

FEATURES

- Designed for mounting on small surface
- Extremely thin/leadless package
- High mounting capability, strong surge with stand, high reliability
- Pb free and RoHS compliant
- Halogen free



**1206 (Ceramics)**

MECHANICAL DATA

- Case: 1206 (Ceramics) standard package
- High temperature soldering guaranteed: 260°C/10s
- Polarity: Indicated by white cathode band
- Weight: 0.010 g (approximately)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T <sub>A</sub> =25°C unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Power dissipation	P <sub>D</sub>	500	mW
Non-repetitive peak reverse voltage	V <sub>RSM</sub>	100	V
Repetitive peak reverse voltage	V <sub>RRM</sub>	75	V
Repetitive peak forward current	I <sub>FRM</sub>	300	mA
Mean forward current	I <sub>O</sub>	150	mA
Non-repetitive peak forward surge current Tp = 1sec square waveform Tp = 8.3ms single half sine waveform	I <sub>FSM</sub>	0.5 2.0	A
Thermal resistance form junction ambient (Note 1)	R <sub>θJA</sub>	375	°C/W
Junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	- 55 to +150	°C

PARAMETER	SYMBOL	MIN	MAX	UNIT
Reverse breakdown voltage (Note 2)	V <sub>(BR)</sub>	75	-	V
Forward voltage I <sub>F</sub> =100mA	V <sub>F</sub>	-	1	V
Reverse leakage current V <sub>R</sub> =20V V <sub>R</sub> =75V	I <sub>R</sub>	-	25	nA
		-	5	μA
Junction capacitance V <sub>R</sub> =0, f=1.0MHz	C <sub>J</sub>		4.0	pF
Reverse recovery time (Note 3)	t <sub>rr</sub>		4	ns

Note: 1 Valid provided that electrodes are kept at ambient temperature

Note: 2 Test Condition : I<sub>R</sub>=100μA

Note: 3 Test Condition : I<sub>F</sub>=10mA, I<sub>R</sub>=1mA, R<sub>L</sub>=100Ω

Small Signal Product

RATINGS AND CHARACTERISTICS CURVES

( $T_A=25^\circ\text{C}$  unless otherwise noted)

Fig. 1 Typical Forward Characteristics

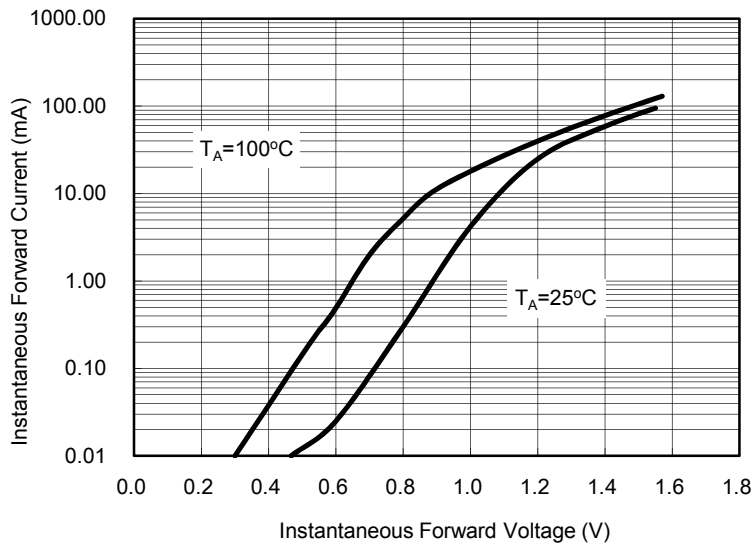


Fig. 2 Reverse Current VS. Reverse Voltage

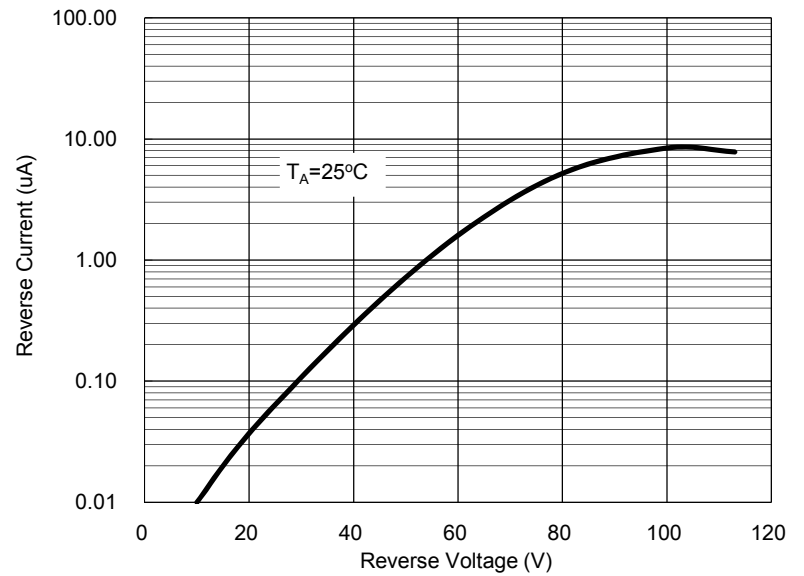


Fig. 3 Admissible Power Dissipation Curve

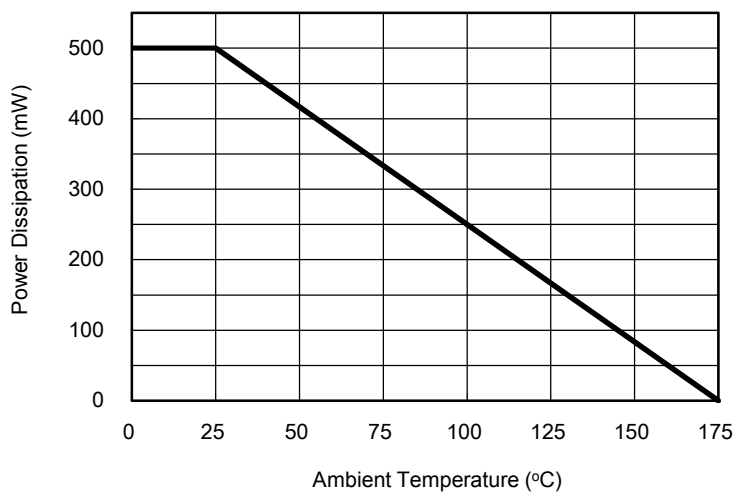


Fig. 4 Typical Junction Capacitance


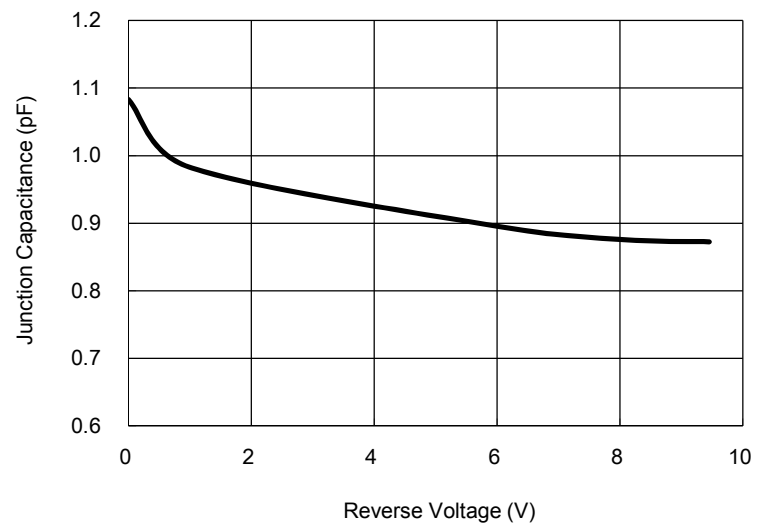


Fig. 5 Forward Resistance VS. Forward Current

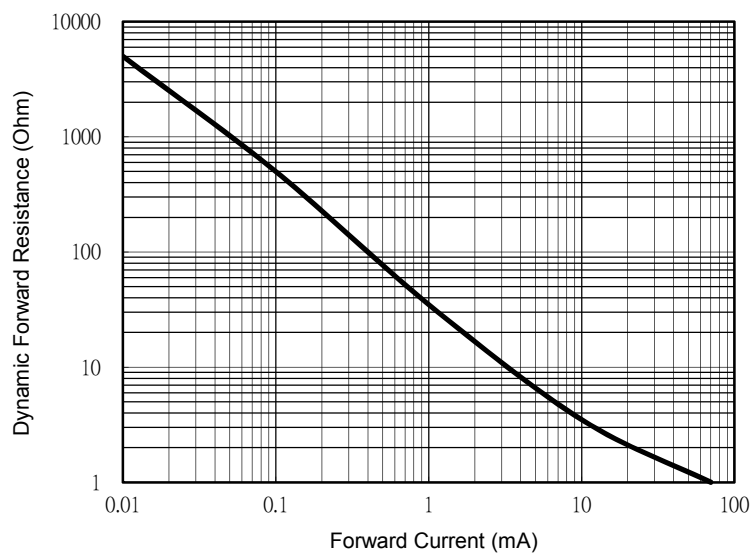


Small Signal Product

ORDERING INFORMATION					
PART NO.	PART NO. SUFFIX (Note 1)	PACKING CODE	PACKING CODE SUFFIX	PACKAGE	PACKING
TS4148	-xx	RX	G	1206 (Ceramics)	5K / 7" Reel
		RA			10K / 13" Reel

Note 1: Part No. Suffix „-xx “ would be used for special requirement

EXAMPLE					
PREFERRED PART NO.	PART NO.	PART NO. SUFFIX	PACKING CODE	PACKING CODE SUFFIX	DESCRIPTION
TS4148 RXG	TS4148		RX	G	Multiple manufacture source Green compound
TS4148-C0 RXG	TS4148	-C0	RX	G	Defined manufacture source Green compound

PACKAGE OUTLINE DIMENSIONS  
**1206 (Ceramics)**

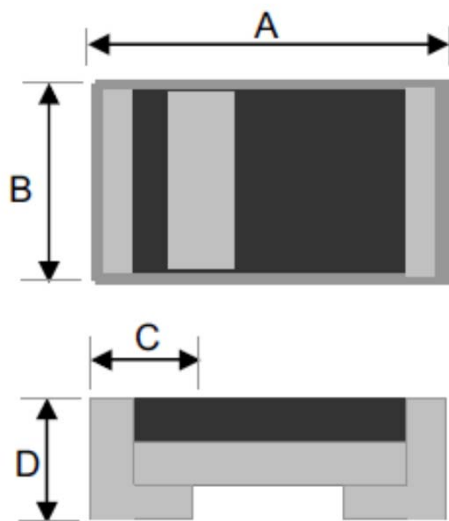

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	3.00	3.40	0.118	0.134
B	1.30	1.70	0.051	0.067
C	0.35	0.75	0.014	0.030
D	0.75	0.95	0.030	0.037

### Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.