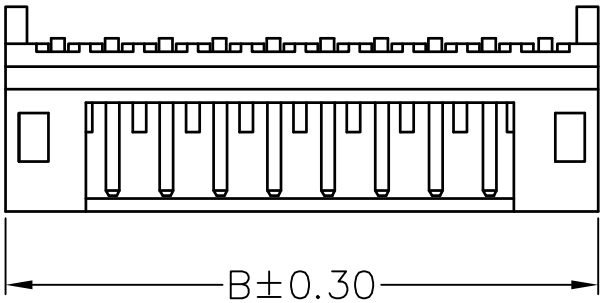



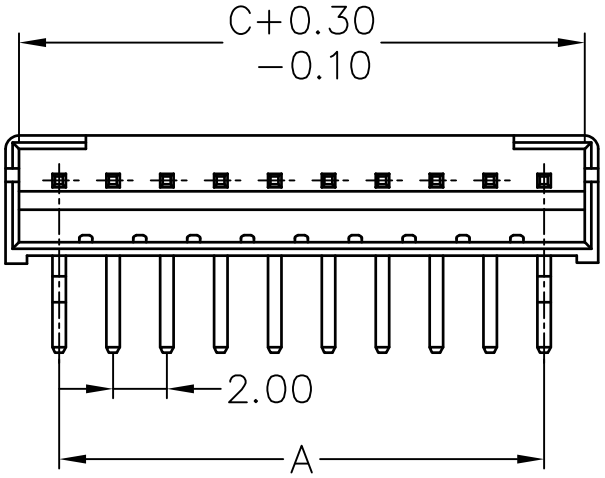

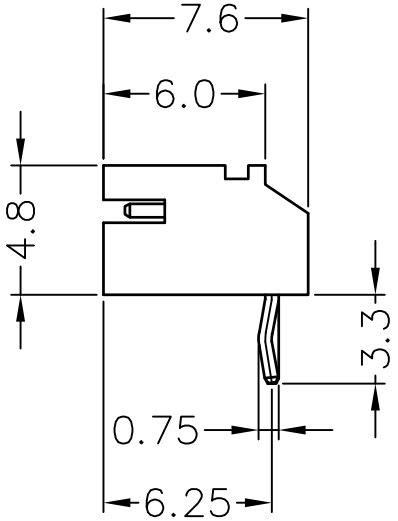

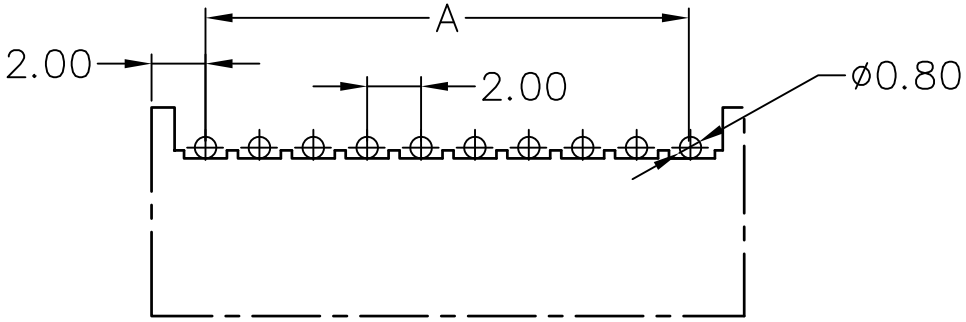

Recommended P.C.B Layout

MATERIAL

1.Contact: Brass
2.Base: Refer the above narrative
C 3.Insulator: NY66 UL94−V0

SPECIFICATION

C Rating Voltage: 100V AC/DC
Current Rating : 2A AC/DC
Withstanding Voltage : 800V AC/minute
Insulation Resistance : 1000MΩ min
Contact Resistance : 20mΩ max
Operation Temperature : −25℃ to +85℃

721−7 2−xx T W 09
1 2 3 4 5

1. 5: Normal Parts
   7: Green Product
   9: Green Product High Temp
2. No. of contacts per row
3. G: Gold flash
   S: Selective
   T: Tin plated
4. S: Crystal insulator
   W: White insulator
5. Pinrex internal code.
   With Kink

Poles	Dimension(mm)		
	A	B	C
02	2.00	6.00	5.00
03	4.00	8.00	7.00
04	6.00	10.00	9.00
05	8.00	12.00	11.00
06	10.00	14.00	13.00
07	12.00	16.00	15.00
08	14.00	18.00	17.00
09	16.00	20.00	19.00
10	18.00	22.00	21.00
11	20.00	24.00	23.00
12	22.00	26.00	25.00
13	24.00	28.00	27.00
14	26.00	30.00	29.00
15	28.00	32.00	31.00
16	30.00	34.00	33.00

REV.	DESCRIPTION	DATE
C	增加材質，防火等級與額定電壓	2018/01/31
B	增加工作溫度	2016/04/29
A	RELEASE	2013/05/22

TOLERANCE
.0 =±.30
.00 =±.20
.000 =±.XXX
.0000=±.
ANG.=±3°

UNITS : mm
SCALE NONE
SIZE A4

OLD PART NO.
DRAWER 楊海琴
CHECK 李劍
SHEET 1 OF 1
REV. C
APP'D 李劍

TITLE: JST 2.0mm WAFER RIGHT ANGLE TYPE
NEW PART NO. 721−72−xxTW09

PINREX 頻銳科技股份有限公司
PINREX TECHNOLOGY CORP.
DRAW NO. 721−72−xxTW09(C版)