





reference

## 2J510F - flexible

mounting position	<b>ON GLASS</b>
nominal impedance	<b>50 Ohms</b>
frequency	<b>AMPS 824-894MHz / GSM 900, 1800 MHz PCN 1,9GHz / UMTS 2,1GHz/ Bluetooth 2,4GHz</b>
polarisation	<b>Horizontal</b>
gain	<b>2.14 dBi</b>
vswr	<b>&lt;2:1</b>
power handling	<b>25W</b>
cable	<b>2.5m RG174</b>
connector	<b>FME Female</b>
housing size	<b>11- 15mm x 123 mm x 4,6mm</b>
working temperature	<b>-40°C to +85°C</b>

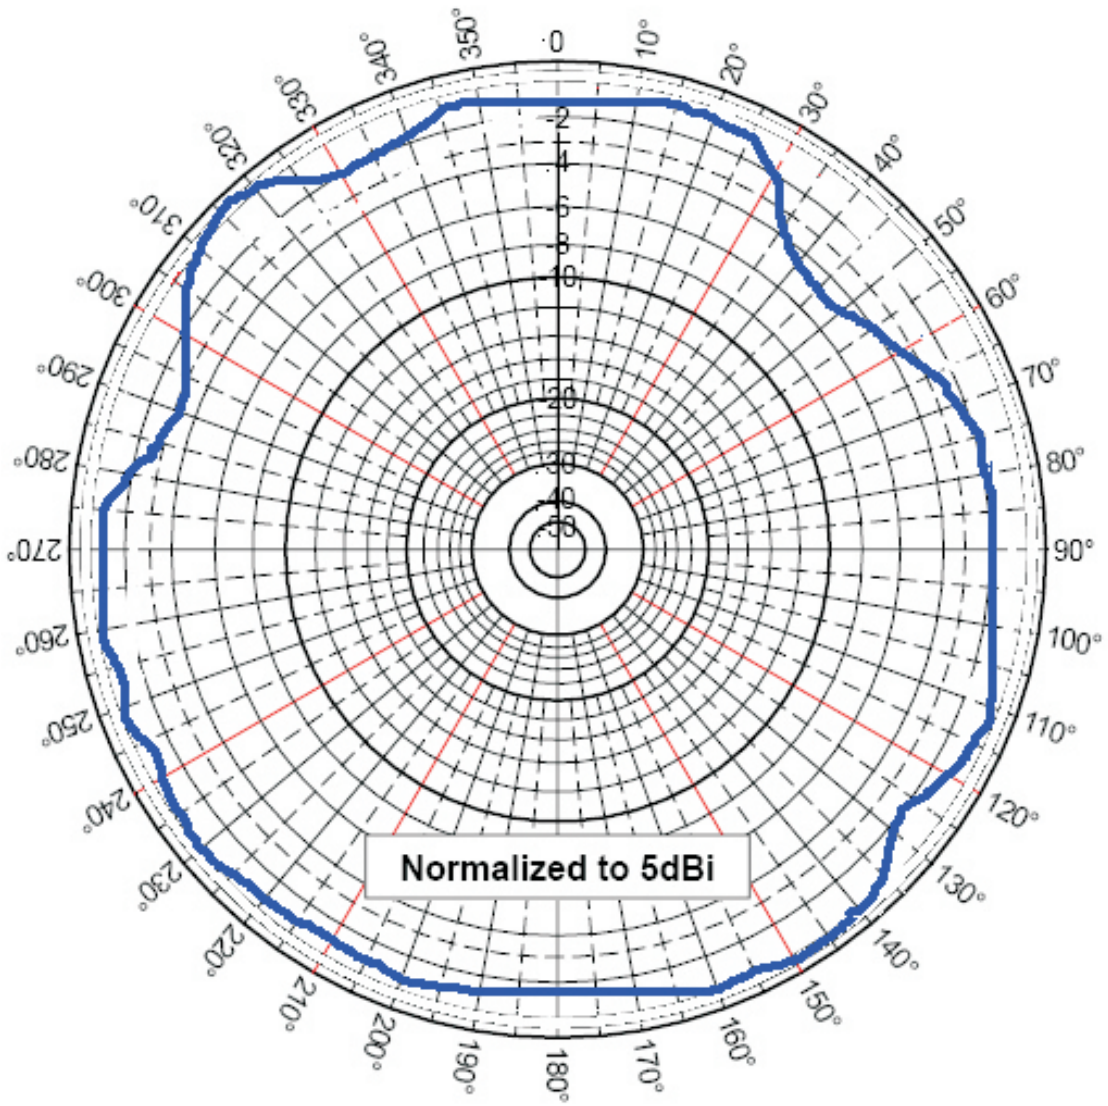

Azimuthal Pattern (X, Y or E-Plane)

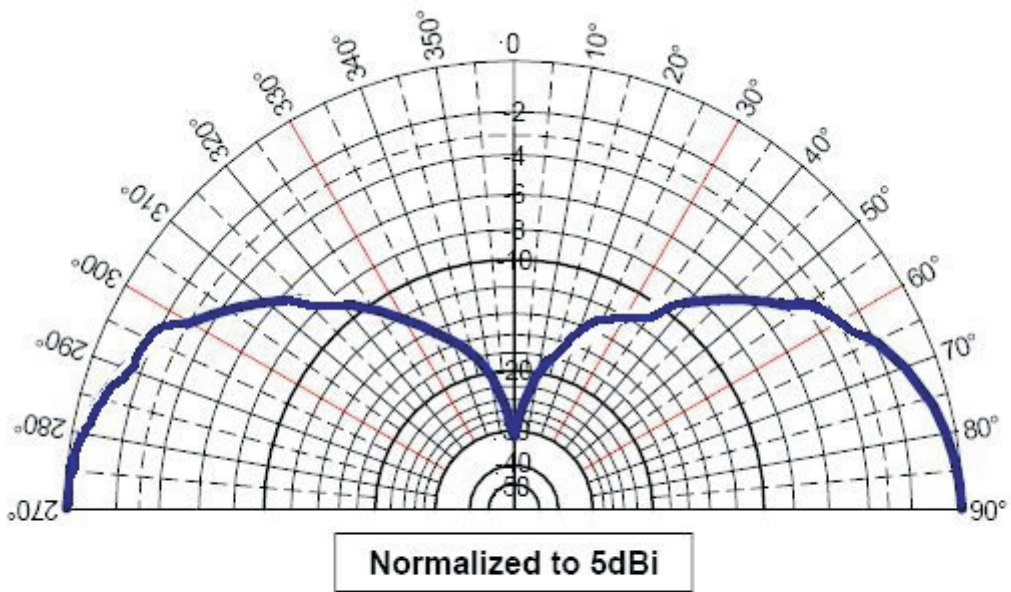

Elevation Pattern (Z, Y or H-Plane)

