

Data sheet Product SLV W 2 SMD 048 10 Z




PCB connectors>Male headers

pitch 1.27 x 2.54 mm; two rows, wide isolation body 4-40 contacts □ 0,4 mm

Features

pitch:	1.27 x 2.54 mm
no. of contacts:	10
contact material:	CuZn-alloy
surface of contact:	tin-plated
surface contact / contact sleeve:	• Ni+≥0.2µm Au • Ni+4...6µm Sn
version:	male header
volume resistance:	≤5 mΩ
nominal current:	1.5 A
nominal voltage:	125 V AC
test voltage:	300 V
insulating body material:	PA 4.6. GF
temperature range:	• -40°C... +163°C • (260°C/10 s)
class of inflammability:	UL 94 V-0
specific insulation resistance:	>10 ⁷ Ω·m
connection type:	SMD
reflow solderable:	yes

Technical Drawing

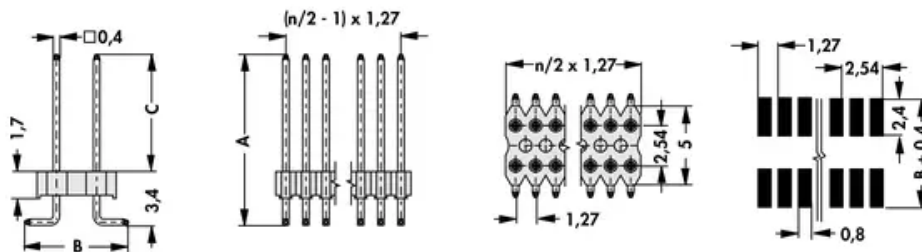

A: 8.2 mm

B: 6.6 mm

C: 4.8 mm

Fischer Elektronik GmbH & Co. KG
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
58511 Lüdenscheid

Telefon +49 2351 435-0
Telefax +49 2351 45754

info@fischerelektronik.de
www.fischerelektronik.de