

Data sheet

721-608

MALE CONNECTOR 8 POLE
100% PROTECTED AGAINST MISMATING WITHOUT PRECEDING EARTH
CONTACT CAGE CLAMP CONNECTION



Technical data

Package size 50 pieces.

Pin spacing from	5 mm
Pin spacing from	0.197 in
pole count	8
Cross section from [mm ²]	0.08 mm ²
Cross section to [mm ²]	2.5 mm ²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Voltage CSA	300 V
Current CSA	15 A
Measured voltage EN	250 V
Measured shock voltage	4 kV
Pollution degree	3
Current intensity EN	12 A
Weight	12.42 g
Color	light grey
No. of connection Points	8
No. of potentials	8
Height	14.3 mm
Height	0.563 in
Width	43.2 mm
Width	1.701 in
Depth	27.5 mm
Depth	1.083 in

Data sheet

721-608

**MALE CONNECTOR 8 POLE
100% PROTECTED AGAINST MISMATING WITHOUT PRECEDING EARTH
CONTACT CAGE CLAMP CONNECTION**

Strip length from	8 mm
Strip length to	9 mm
Strip length	0.33 in

xxx-xxx/034-000	Strain relief plate 30 mm
-----------------	---------------------------

Data sheet**721-608****MALE CONNECTOR 8 POLE
100% PROTECTED AGAINST MISMATING WITHOUT PRECEDING EARTH
CONTACT CAGE CLAMP CONNECTION**

Approval	Voltage	Current	Approval number	Notes
BBJ	250	12	B/12/699/03	
BV	250	12	11915/A0	
CCA	250	12	DK2127	
CSM	250	12	017956	
DNV	250	12	E-6997	
GL	250	12	17296-00HH	
KEMA	250	12	98.2486.01	
LR	250	12	96/20035	
NEMKO	250		P94101840	
RMR	250	12	99.00007.250	
RosTesT	250	12	B09523	
VDE	250	12	5675ÜGBI.2	

Data sheet

721-608

**MALE CONNECTOR 8 POLE
100% PROTECTED AGAINST MISMATING WITHOUT PRECEDING EARTH
CONTACT CAGE CLAMP CONNECTION**

Accessories


Item number

CABLE CLAMP FOR STRAIN RELIEF	209-174
CODING KEY FOR SNAP IN	231-129
COMB TYPE JUMPER BAR FOR PIN SPACING 5MM / 0.197 IN AND 5.08 MM / 0.2 IN	231-902
FIXING SCREW FOR CABLE STRAP	209-173
ISULATION STOP 0.08 - 0.2 MM ² / 0.2 MM ² S	231-670
ISULATION STOP 0.25 - 0.5 MM ²	231-671
ISULATION STOP 0.75 - 1 MM ²	231-672
LOCKOUT CAPS FOE COVERING UNUSED CLAMPING UNITS	231-668
OPERATING STICKER FOR MULTI CONNECTION SYSTEM	210-199
OPERATING TOOL FOR FEMALE AND MALE CONNECTORS WITH CAGE CLAMP	210-250
OPERATING TOOL TO CONNECT JUMPERS	209-132
PUSH BUTTON FOR FEMALE CONNECTORS AND MALE CONNECTORS	231-131
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-257
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-258
SCREWDRIVER Type 2, bar (3,5 x 0,5) mm	210-120
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm	210-620
SNAP-ON TYPE RELIEF HOUSING CONSISTING OF: STRAIN RELIEF SUPPORT/ HOUSING	232-608

Data sheet

721-608

MALE CONNECTOR 8 POLE
100% PROTECTED AGAINST MISMATING WITHOUT PRECEDING EARTH
CONTACT CAGE CLAMP CONNECTION

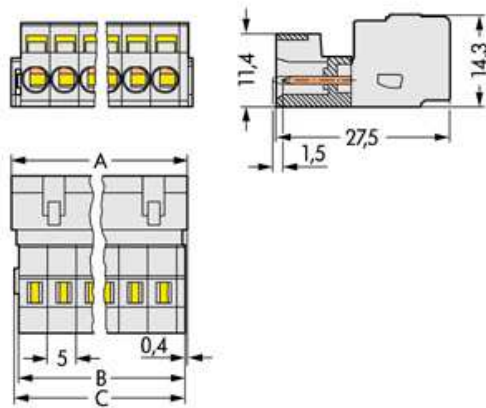

Data sheet

721-608

**MALE CONNECTOR 8 POLE
100% PROTECTED AGAINST MISMATING WITHOUT PRECEDING EARTH
CONTACT CAGE CLAMP CONNECTION**

A = (No.of poles x pin spacing) + 3,2 mm

B = A - 1,7 mm

C = A - 1,2 mm