

Inserts for M23 circular connectors

EPIC® SIGNAL M23 Inserts 8+1 pole for M23 circular connector series















Variety of approval certifications



Robust



Assembly time



Mechanical resistance



Good chemical resistance



Wind Energy



Industrial machinery and plant engineering

Benefits

Universal further processing of the M23 inserts through different packaging units. Fully assembled with suitable solder contacts or unpopulated for individual assembly with crimp or solder contacts

Application range

Plant engineering

Measurement and control technology

Apparatus construction

Last Update (23.04.2018)
©2018 Lapp Group - Technical changes reserved
Product Management www.lappkabel.de
You can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03.16



Technical Data

Classification: ETIM 5.0 Class-ID: EC000438

ETIM 5.0 Class-Description: Contact insert for industrial

connectors

Rated voltage (V): according to IEC 61984: 150 V

Rated impulse voltage: 2.5 kV

Rated current (A): 20 A (2 mm contact)

7 A (1 mm contacts)

Pollution degree:

Contact resistance: < 4 mOhm

Contacts: Gold-plated brass

Number of contacts: 8 + 1

Termination methods: Crimp termination: 0.14 - 1.0 mm²

(1.0 - 2.5 mm² for 2-mm contact) Solder termination: up to 1.0 mm² (up to 2.5 mm² for 2-mm contact)

Cycle of mechanical operation: 100

VDE-tested: Certified production control: VDE-REG. no. C24 (according to

EN 61984, SELV according to DIN VDE 0100-410 has to be

guaranteed)

UL File Number: E249137

Temperature range: -25°C up to +125°C

Note


The inserts are suitable for both male and female contacts. For a complete connection, you will need one P-component and one E-component. P-component = left turning (anticlockwise), E-component = right turning (clockwise)

Photographs are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.

Article number	Article description	Inserts	Contacts included	Pin configuration
8+1-pin inserts, P-part = rotation to the left (plug side anticlockwise)				
73002736	P-part	without contacts	-	8+1
73002737	P-part	without contacts	-	8+1
73002738	P-part	+ male contacts, solder	9	8+1
73002739	P-part	+ male contacts, solder	9	8+1
73002740	P-part	+ female contacts, solder	9	8+1
73002741	P-part	+ female contacts, solder	9	8+1
8+1-pin inserts, E-part = rotation to the right (plugside clockwise)				
73002742	E-Part	without contacts	-	8+1
73002743	E-Part	without contacts	-	8+1
73002744	E-Part	+ male contacts, solder	9	8+1
73002745	E-Part	+ male contacts, solder	9	8+1
73002746	E-Part	+ female contacts, solder	9	8+1
73002747	E-Part	+ female contacts, solder	9	8+1



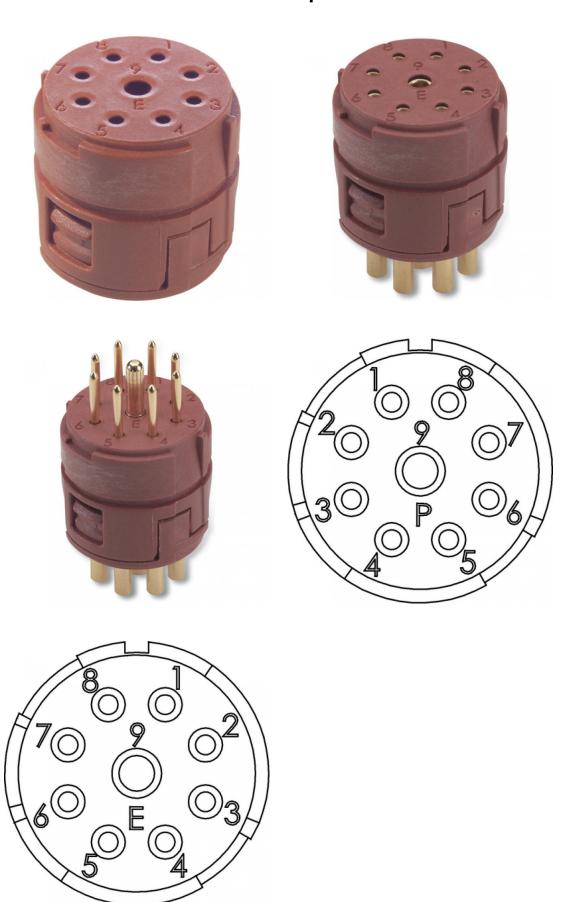

Last Update (23.04.2018)
©2018 Lapp Group - Technical changes reserved
Product Management www.lappkabel.de
You can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03.16