

Data sheet

826-159/000-016

MODULAR FEEDTHROUGH END TERMINAL BLOCK PIN SPACING 7 MM / 0.276 IN
CAGE CLAMP CONNECTION



Technical data

Package size 50 pieces.

Pin spacing from	7 mm
Pin spacing from	0.276 in
pole count	1
Cross section from [mm ²]	0.08 mm ²
Cross section to [mm ²]	4 mm ²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Measured voltage EN	500 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	32 A
Weight	5.311 g
Color	green-yellow
Wiring type	Angled Type
No. of connection Points	2
No. of potentials	1
Height	23.55 mm
Height	0.927 in
Width	7 mm
Width	0.276 in
Depth	42.5 mm
Depth	1.673 in
Strip length from	9 mm

Data sheet

826-159/000-016

**MODULAR FEEDTHROUGH END TERMINAL BLOCK PIN SPACING 7 MM / 0.276 IN
CAGE CLAMP CONNECTION**

Strip length to	10 mm
Strip length	0.37 in

Data sheet

826-159/000-016

**MODULAR FEEDTHROUGH END TERMINAL BLOCK PIN SPACING 7 MM / 0.276 IN
CAGE CLAMP CONNECTION**

Approval	Voltage	Current	Approval number	Notes
cURus	300/150	20/10	E45172	

Data sheet

826-159/000-016

**MODULAR FEEDTHROUGH END TERMINAL BLOCK PIN SPACING 7 MM / 0.276 IN
CAGE CLAMP CONNECTION**


Accessories**Item number**

END PLATE SNAP FIT TYPE	826-158
END PLATE SNAP FIT TYPE	826-158/000-006
END PLATE SNAP FIT TYPE	826-158/000-016
LOCKING COVER IN EXCHANGE	826-155
LOCKING COVER IN EXCHANGE	826-156
LOCKING COVER IN EXCHANGE	826-157
Marker cards COMPUTER MARKED	826-501
MINIATURE WSB QUICK MARKING SYSTEM PLAIN	248-501
MINIATURE WSB QUICK MARKING SYSTEM PLAIN	248-501/000-002
MINIATURE WSB QUICK MARKING SYSTEM PLAIN	248-501/000-005
MINIATURE WSB QUICK MARKING SYSTEM PLAIN	248-501/000-006
MINIATURE WSB QUICK MARKING SYSTEM PLAIN	248-501/000-007
MINIATURE WSB QUICK MARKING SYSTEM PLAIN	248-501/000-012
MINIATURE WSB QUICK MARKING SYSTEM PLAIN	248-501/000-017
MINIATURE WSB QUICK MARKING SYSTEM PLAIN	248-501/000-023
MINIATURE WSB QUICK MARKING SYSTEM PLAIN	248-501/000-024
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 3, bar (5,5 x 0,8) mm	210-621
TEST PLUG 2 MM / 0.079 IN WIDE	210-136
TEST PLUG 2.3 MM / 0.091 IN WIDE	210-137

Data sheet

826-159/000-016

MODULAR FEEDTHROUGH END TERMINAL BLOCK PIN SPACING 7 MM / 0.276 IN
CAGE CLAMP CONNECTION

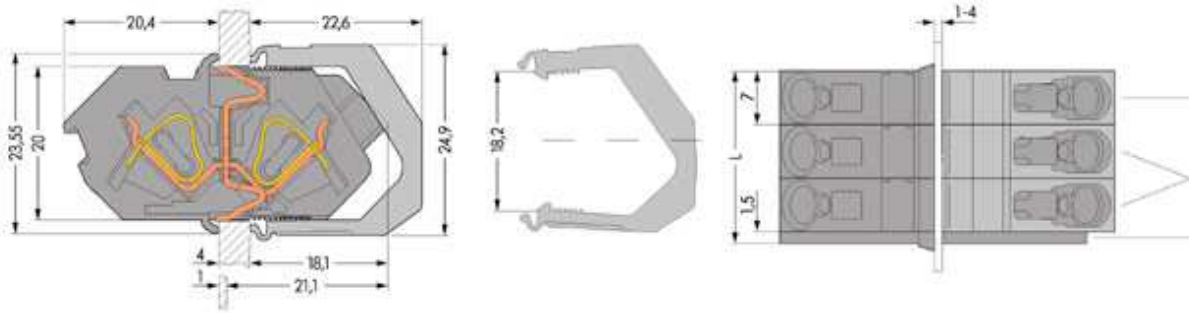

Data sheet

826-159/000-016

MODULAR FEEDTHROUGH END TERMINAL BLOCK PIN SPACING 7 MM / 0.276 IN
CAGE CLAMP CONNECTION

$L = (\text{No. of poles} \times \text{pin spacing}) + 1,5 \text{ mm}$