

Data sheet

734-162

**HEADER RIGHT ANGLE SOLDER PIN, 1 X 1 MM / 0.039 X 0.039 IN
PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING WITH
CLOSED END**



Technical data

Package size 200 pieces.

Pin spacing from	3.5 mm
Pin spacing from	0.138 in
pole count	2
Voltage CSA	300 V
Measured voltage EN	250 V
Measured shock voltage	2.5 kV
Pollution degree	2
Current intensity EN	10 A
Weight	0.648 g
Color	light grey
Height	8.5 mm
Height	0.335 in
Width	9.4 mm
Width	0.37 in
Depth	10.3 mm
Depth	0.406 in

Data sheet

734-162

**HEADER RIGHT ANGLE SOLDER PIN, 1 X 1 MM / 0.039 X 0.039 IN
PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING WITH
CLOSED END**

Approval	Voltage	Current	Approval number	Notes
BV	250	10	11915/A0	
CCA	250	10	123898-02	
CCA	250	10	NL5641	
CSM	250	10	017956	
DEMKO	250	10	00-00103	
DNV	250	10	E-6997	
GL	250	10	17296-00HH	
KEMA	250	10	2077592.02	
LR	250	10	96/20035	
RMR	250	10	99.00007.250	
RosTesT	250	10	B09523	

Data sheet

734-162

**HEADER RIGHT ANGLE SOLDER PIN, 1 X 1 MM / 0.039 X 0.039 IN
PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING WITH
CLOSED END**

Accessories

Item number


CODING KEY TO BE SNAPPED ABOVE TOP LEVEL

734-130

Data sheet

734-162

**HEADER RIGHT ANGLE SOLDER PIN, 1 X 1 MM / 0.039 X 0.039 IN
PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING WITH
CLOSED END**

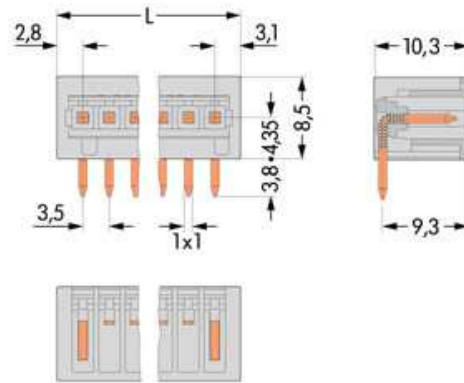

Data sheet

734-162

**HEADER RIGHT ANGLE SOLDER PIN, 1 X 1 MM / 0.039 X 0.039 IN
PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING WITH
CLOSED END**

Diameter of drilled hole: $1,4^{+0,1}$ mm

$L = (\text{No.of poles} - 1) \times \text{pin spacing} + 5,9$ mm