

Data sheet Product SLV W 4 SMD 073 8 G



PCB connectors>Male headers

- matching for female header BLV 2 ...
- two rows 4-40 contacts
- grid spacing 1.27 x 1.27 mm

... packing (option) - additions:

SLV W 4 SMD ... B TR: 4-12 contacts

Packaging options pick and place pad in bar magazine "... B SM" and pick and place pad in tape & reel "... B TR" on request.


Features

pitch:	1.27 x 1.27 mm
no. of contacts:	8
contact material:	CuZn-alloy
surface of contact:	gold-plated
surface contact / contact sleeve:	• Ni+≥0.2µm Au • Ni+4...6µm Sn
version:	male header
volume resistance:	≤5 mΩ
nominal current:	1.5 A
nominal voltage:	125 V AC
test voltage:	300 V
insulating body material:	PA 4.6. GF
temperature range:	• -40°C... +163°C • (260°C/10 s)
class of inflammability:	UL 94 V-0
specific insulation resistance:	>10 ⁷ Ω·m
connection type:	SMD
reflow solderable:	yes

packing (optional):

pick and place pad and tape and reel (250pcs/reel)

Technical Drawing

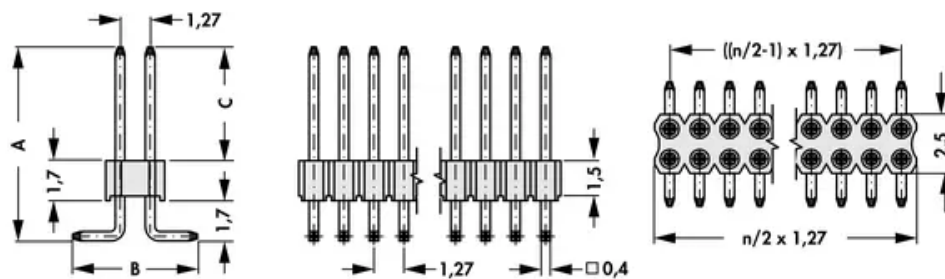

A: 10.7 mm

B: 5.3 mm

C: 7.3 mm

Fischer Elektronik GmbH & Co. KG
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
58511 Lüdenscheid

Telefon +49 2351 435-0
Telefax +49 2351 45754

info@fischerelektronik.de
www.fischerelektronik.de