


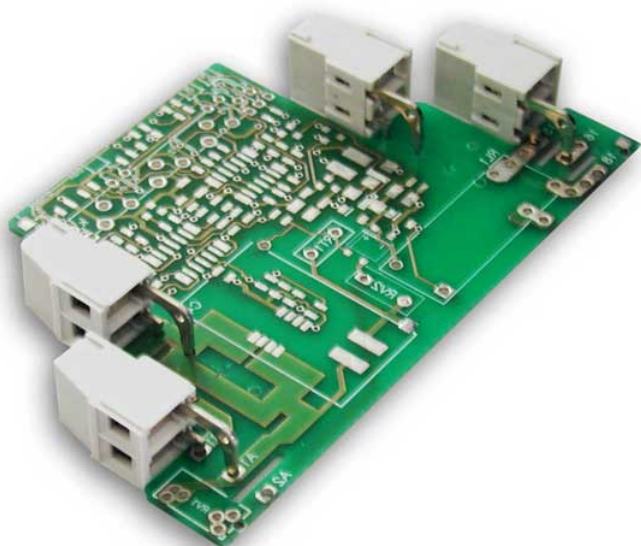


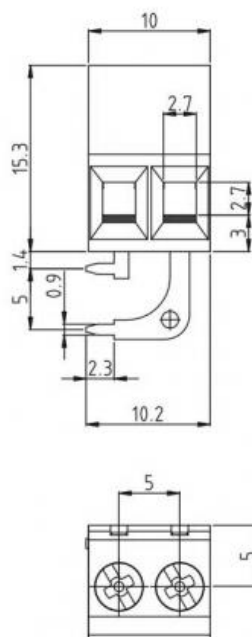

ML252-5-S-LC

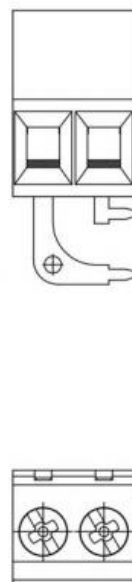

ML252-5-D-LC

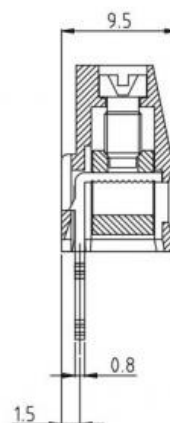

Single-deck terminal block - Left side for CEM22-V - Pitch 5mm - 2 poles

GENERAL INFORMATION

pitch:	5 mm
housing height:	15,30 mm
housing depth:	9.5 mm
dimensional class:	medium
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	2.7 × 2.7 mm
wire stripping:	max 7 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	16A
voltage:	250V
test voltage:	2 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
max. torque:	0.5 Nm / 4.5 in.lbs

APPROVALS DATA



EN 60998-1

-
-
-
-
-

current:	16A
voltage:	250V
wire section:	2,5mm ²
torque:	0,5Nm
FILE:	CA02.01614

UL 1059
15A factory / 15A field
300V
14÷30AWG
4,5Lb-in
E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	Galvanized steel

AVAILABLE COLOURS



clamp/spring: Nickeled copper alloy other colours: upon request
terminal: Tin-plated copper alloy

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	ML252-5-S-LC	N/A	N/A	N/A