

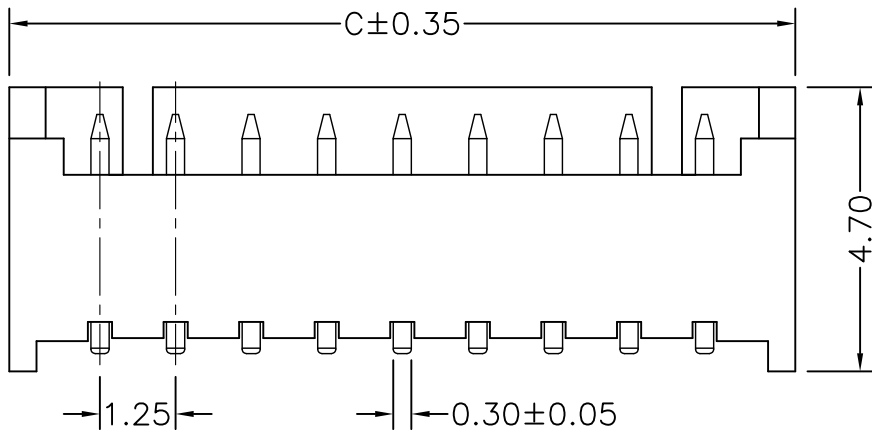
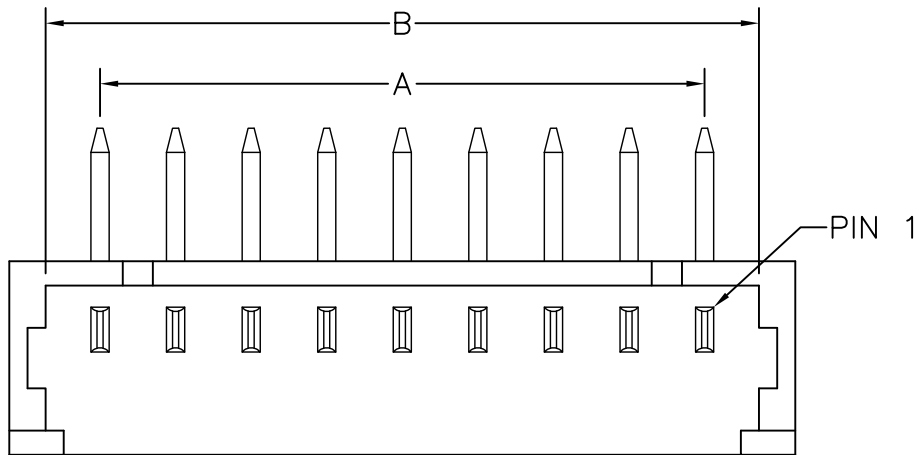



Recommended P.C.B Layout

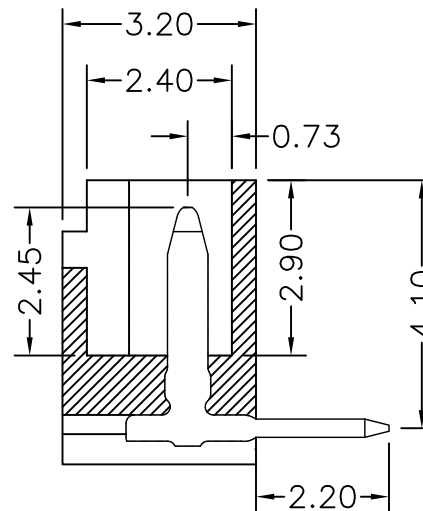

02~03P



04~15P



MATERIAL

Housing: HTN UL94-V0

Contact Pin: Copper Alloy T=0.30MM

Specification

Current Rating: 1A

Voltage Rating: 125V AC

Contact Resistance: 20mΩ Max, (Initial) 40mΩ Max, (Final)

Insulation Resistance: 100MΩ Min. At 500V

Dielectric Withstanding Voltage: AC 250V/Minute

712-H7 2-xx 5 W 01
1 2 3 4 5

1. H7: Halogen free
Green Product
2. No. of contacts per row
3. G: Gold flash
T: Tin plated
5: Matte Tin plated
4. W: White insulator
5. Pinrex internal code.

Poles	DIM A	DIM B	DIM C
2	1.25	3.05	4.25
3	2.50	4.30	5.50
4	3.75	5.55	6.75
5	5.00	6.80	8.00
6	6.25	8.05	9.25
7	7.50	9.30	10.50
8	8.75	10.55	11.75
9	10.00	11.80	13.00
10	11.25	13.05	14.25
11	12.50	14.30	15.50
12	13.75	15.55	16.75
13	15.00	16.80	18.00
14	16.25	18.05	19.25
15	17.50	19.30	20.50

REV.	DESCRIPTION	DATE
A	RELEASE	2015/06/16

TOLERANCE
.0 = ±.50
.00 = ±.30
.000 = ±.XXX
.0000 = ±.
ANG. = ±3°

UNITS : mm
SCALE NONE
SIZE A4

OLD PART NO.	
DRAWER 廖小芳	CHECK
SHEET 1 OF 1	REV. A
APP'D	

TITLE	WIRE TO BOARD 1.25mm WAFFER DIP 90°
NEW PART NO.	712-H72-xx5W01

	頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
DRAW NO.	712-H72-xx5W01