
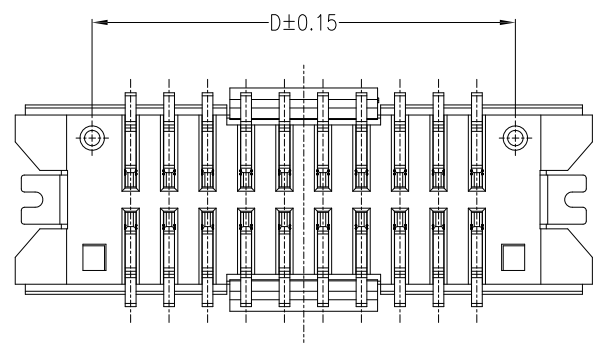

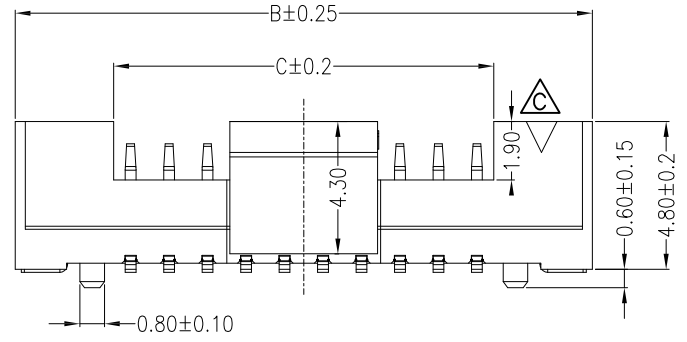
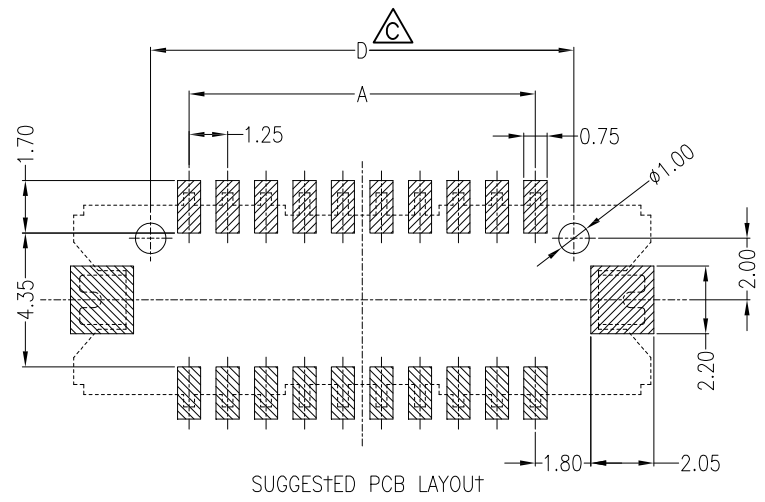


Specifications:
Poles:10 to 50
Contact resistance:≤30mΩ
Insulation resistance:≥500MΩ
Rated voltage:150V AC DC
Rated current:1.0A AC DC
Withstand Voltage: 500V AC/minute
Temperature Range:−40°C~ +85°C
Housing: LCP UL94V−0,Natural(Beige)
CAP:PA9T UL94V−0,Natural(Beige)
Contacts:Brass/Sn−plated
Solder Tabs:Brass/Sn−plated

712−9 6−xx T W E00R
1 2 3 4 5

- 1. 7: Green Product
9: Green Product High Temp
- 2. No. of contacts
- 3. G: Gold flash
S: Selective
T: Tin plated
- 4. S: Crystal insulator
W: White Insulator
- 5. Pinrex internal code.

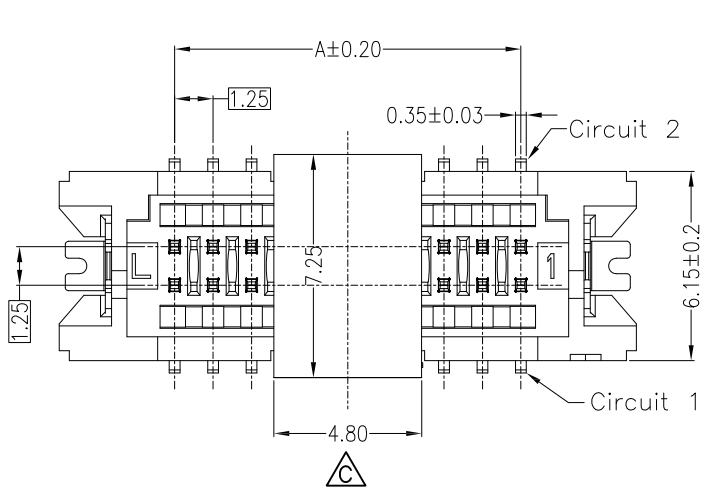

Circuits	Dimensions (mm)			
	A	B	C	D
2x05P	5.00	12.50	6.10	7.50
2x10P	11.25	18.75	12.35	13.75
2x15P	17.50	25.00	18.60	20.00
2x20P	23.75	31.25	24.85	26.25
2x25P	30.00	37.50	31.10	32.50

			TOLERANCE		 UNITS : mm	OLD PART NO.			TITLE 1.25mm Pitch Wafer 180° SMT	 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.	
C	新增圖面尺寸	2024/05/22	.0 =±.30			DRAWER 李孟瑤	CHECK 李劍				
B	更新材質	2023/08/15	.00 =±.20								
A	RELEASE	2022/06/07	.000 =±.XXX								
REV.	DESCRIPTION	DATE	.0000=±.		SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. C	APP'D 李劍	NEW PART NO. 712-96-xxTWE00R	DRAW NO. 712-96-xxTWE00R(C版)
			ANG.=±3°								