


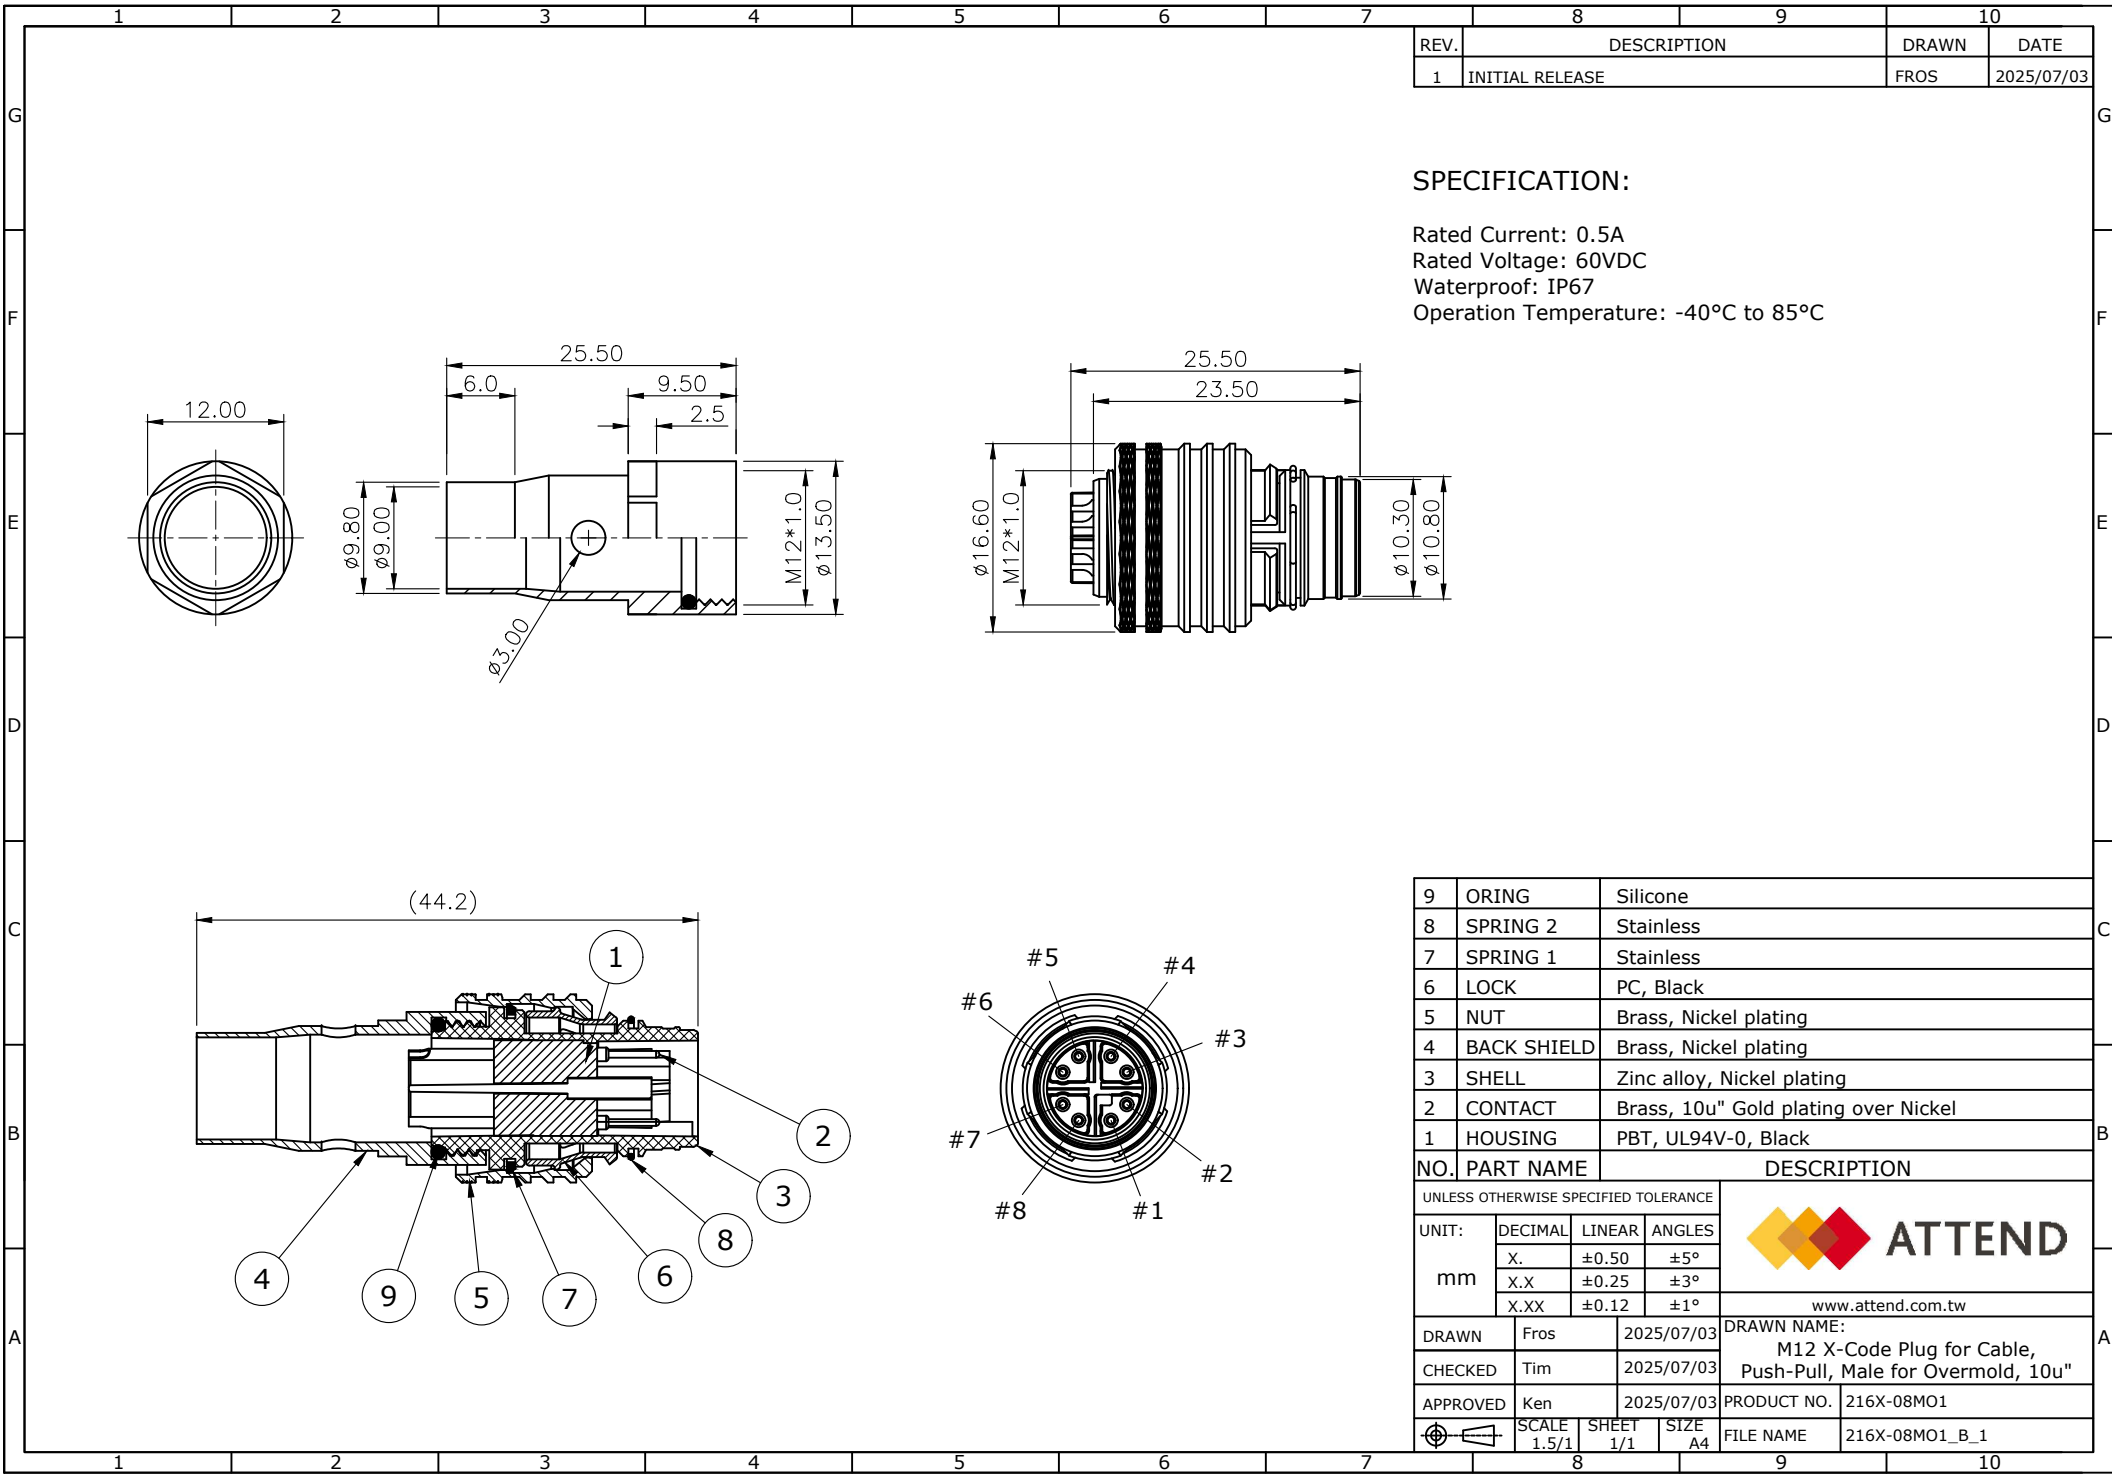

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/07/03

SPECIFICATION:

Rated Current: 0.5A
Rated Voltage: 60VDC
Waterproof: IP67
Operation Temperature: -40°C to 85°C

9	ORING	Silicone
8	SPRING 2	Stainless
7	SPRING 1	Stainless
6	LOCK	PC, Black
5	NUT	Brass, Nickel plating
4	BACK SHIELD	Brass, Nickel plating
3	SHELL	Zinc alloy, Nickel plating
2	CONTACT	Brass, 10u" Gold plating over Nickel
1	HOUSING	PBT, UL94V-0, Black

NO.		PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE				ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
www.attend.com.tw					
DRAWN	Fros		2025/07/03		DRAWN NAME: M12 X-Code Plug for Cable, Push-Pull, Male for Overmold, 10u"
CHECKED	Tim		2025/07/03		
APPROVED	Ken		2025/07/03		
APPROVED		Ken		PRODUCT NO.	216X-08M01
		SCALE 1.5/1	SHEET 1/1	SIZE A4	FILE NAME 216X-08M01_B_1