
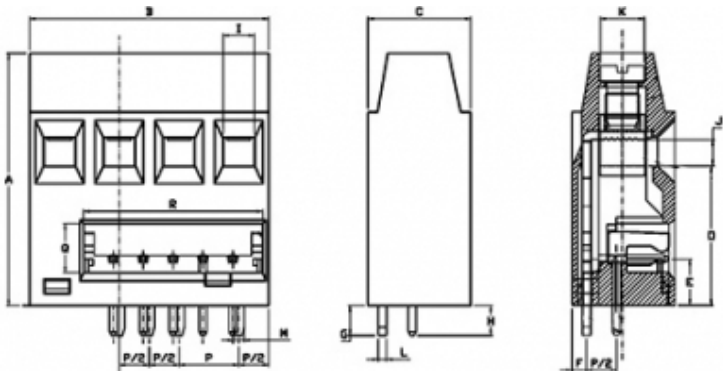


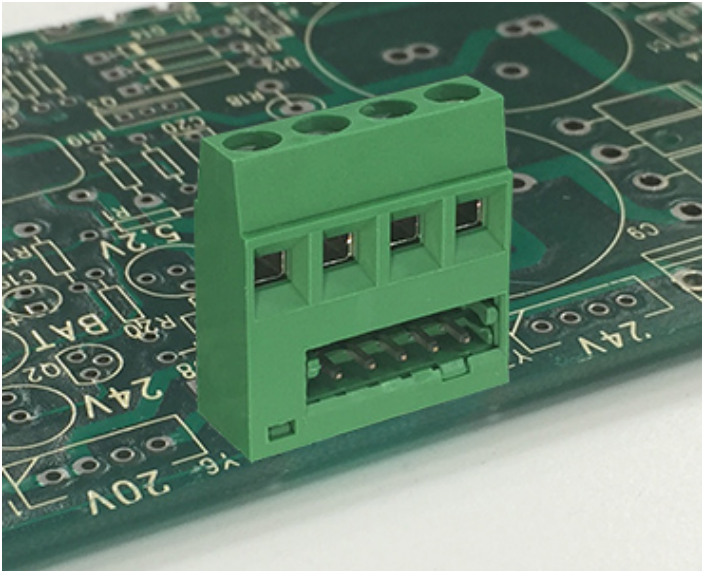

DIMENSIONI - DIMENSIONS					
	MDX154 5-PZ	-	-		MDX154 5-PZ
A	21.10	-	-	J	2.20
B	20.00	-	-	K	Ø3.70
C	8.60	-	-	L	0.70
D	3.00	-	-	M	1.00
E	3.90	-	-	N	-
F	1.20	-	-	O	11.65
G	2.50	-	-	P	5.00
H	2.50	-	-	Q	4.10
I	2.60	-	-	R	15.10

Single-deck terminal block - Stackable version - Pitch 5mm - 4 poles

GENERAL INFORMATION

pitch:	5 mm
housing height:	21,10 mm
housing depth:	8.6 mm
dimensional class:	high
wire section:	1,5 mm² / 14 AWG
clamp opening size:	2,6 × 2,2 mm
wire stripping:	max 6,4 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	17,5A
voltage:	250V
test voltage:	2 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
max. torque:	0,5 Nm / 4,5 in.lbs

APPROVALS DATA



current:
voltage:

-
-
-

-
-
-

-
-
-

FILE: - - -

MATERIALS

housing: PA - UL 94 V0
screw: Galvanized steel
clamp/spring: n/a
terminal: n/a

AVAILABLE COLOURS



other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
4	MDX154-5-PZ	N/A	N/A	N/A