

Data sheet

250-215

**1-CONDUCTOR PCB TERMINAL STRIP 1 SOLDER PIN / POLE STAGGERED
PIN SPACING 3.5 MM / 0.138 IN WITH PUSH BUTTONS FRONT-ENTRY**



Technical data

Package size 80 4*20 pieces.

Pin spacing from	3.5 mm
Pin spacing from	0.138 in
pole count	15
Cross section from [mm ²]	0.5 mm ²
Cross section to [mm ²]	1.5 mm ²
Cross section from [AWG]	20 AWG
Cross section to [AWG]	16 AWG
Wiring method	e+f
Voltage UL	300 V
Voltage CSA	300 V
Current UL	2 A
Current CSA	2 A
Measured voltage EN	400 V
Measured shock voltage	4 kV
Pollution degree	2
Current intensity EN	2 A
Weight	7.344 g
Color	grey
Wiring type	Front-entry
No. of connection Points	15
No. of potentials	15
Height	13.1 mm
Height	0.516 in

Data sheet

250-215

**1-CONDUCTOR PCB TERMINAL STRIP 1 SOLDER PIN / POLE STAGGERED
PIN SPACING 3.5 MM / 0.138 IN WITH PUSH BOTTONS FRONT-ENTRY**

Width	54 mm
Width	2.126 in
Depth	12 mm
Depth	0.472 in
Strip length from	8.5 mm
Strip length to	9.5 mm
Strip length	0.35 in

xxx-xxx/000-002	yellow
xxx-xxx/000-005	red
xxx-xxx/000-006	blue
xxx-xxx/000-012	orange
xxx-xxx/000-017	light green
xxx-xxx/000-024	violet
xxx-xxx/000-009	light gray
xxx-xxx/000-004	black
xxx-xxx/000-050	white
xxx-xxx/000-014	brown

Data sheet

250-215

**1-CONDUCTOR PCB TERMINAL STRIP 1 SOLDER PIN / POLE STAGGERED
PIN SPACING 3.5 MM / 0.138 IN WITH PUSH BOTTONS FRONT-ENTRY**

Approval	Voltage	Current	Approval number	Notes
BV	200	2	11915/A0	
CSA	300	2	154112-1327713	
CSM	400	2	017956	
DEMKO	400	2	DK97-01270	
DNV	400	2	E6998	
GL	400	2	17296-00HH	
RMR	400	2	99.00007.250	
RosTesT	400	2	B09523	
UL	300	2	E45172	

Data sheet

250-215

**1-CONDUCTOR PCB TERMINAL STRIP 1 SOLDER PIN / POLE STAGGERED
PIN SPACING 3.5 MM / 0.138 IN WITH PUSH BOTTONS FRONT-ENTRY**


Accessories**Item number**

SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 1, bar (2,5 x 0,4) mm	210-619
SELF-ADHESIVE MARKER STRIPS HEIGHT OF MARKER STRIP 3 MM	709-179
SELF-ADHESIVE MARKER STRIPS HEIGHT OF MARKER STRIP 3 MM	709-180
SELF-ADHESIVE MARKER STRIPS HEIGHT OF MARKER STRIP 3 MM	709-181
TEST PIN TEST WIRE FOR SOLD. ONTO TEST PLUG	735-500

Data sheet

250-215

1-CONDUCTOR PCB TERMINAL STRIP 1 SOLDER PIN / POLE STAGGERED
PIN SPACING 3.5 MM / 0.138 IN WITH PUSH BUTTONS FRONT-ENTRY

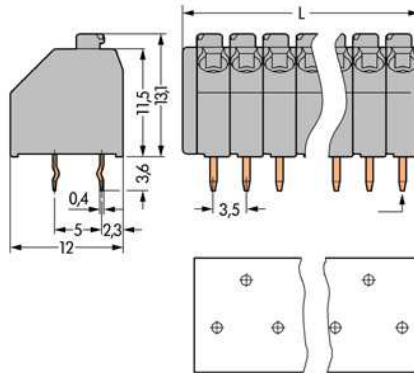

Data sheet

250-215

**1-CONDUCTOR PCB TERMINAL STRIP 1 SOLDER PIN / POLE STAGGERED
PIN SPACING 3.5 MM / 0.138 IN WITH PUSH BOTTONS FRONT-ENTRY**

Diameter of drilled hole: $1^{+0,1}$ mm

$L = (\text{No.of poles} \times \text{pin spacing}) + 1,5 \text{ mm}$