

Data sheet

733-336

**HEADER STRAIGHT SOLDER PIN 0.8x0.8 MM
PIN SPACING 2.5 MM / 0.098 IN 100% PROTECTED AGAINST MISMATING MATING
DIRECTION PERPENDICULAR TO PCB**



Technical data

Package size 200 pieces.

Pin spacing from	2.5 mm
Pin spacing from	0.098 in
pole count	6
Voltage CSA	150 V
Measured voltage EN	250 V
Measured shock voltage	2.5 kV
Pollution degree	2
Current intensity EN	4 A
Weight	0.883 g
Color	light grey
Height	8.9 mm
Height	0.35 in
Width	17.5 mm
Width	0.689 in
Depth	7.8 mm
Depth	0.307 in

Data sheet

733-336

**HEADER STRAIGHT SOLDER PIN0.8x0.8 MM
PIN SPACING 2.5 MM / 0.098 IN 100% PROTECTED AGAINST MISMATING MATING
DIRECTION PERPENDICULAR TO PCB**

Approval	Voltage	Current	Approval number	Notes
BV	250	4	11915/A0	
CCA	250	6	DK118979-03	
CCA	250	4	NL5640	
CSM	250	4	017956	
DNV	250	4	E-6997	
GL	250	4	17296-00HH	
KEMA	250	4	2077592.01	
LR	250	6	96/20035	
RMR	250	4	99.00007.250	
RosTesT	250	4	B09523	

Data sheet

733-336

**HEADER STRAIGHT SOLDER PIN 0.8x0.8 MM
PIN SPACING 2.5 MM / 0.098 IN 100% PROTECTED AGAINST MISMATCHING MATING
DIRECTION PERPENDICULAR TO PCB**

Accessories**Item number**

CODING KEY FOR SNAP IN

733-330


OPERATING STICKER FOR MULTI CONNECTION SYSTEM

210-199

Data sheet

733-336

HEADER STRAIGHT SOLDER PIN 0.8x0.8 MM
PIN SPACING 2.5 MM / 0.098 IN 100% PROTECTED AGAINST MISMATING MATING
DIRECTION PERPENDICULAR TO PCB

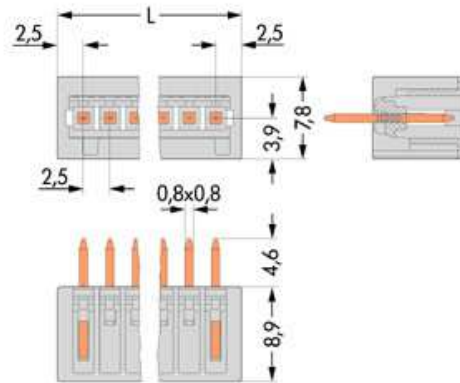

Data sheet

733-336

**HEADER STRAIGHT SOLDER PIN 0.8x0.8 MM
PIN SPACING 2.5 MM / 0.098 IN 100% PROTECTED AGAINST MISMATING MATING
DIRECTION PERPENDICULAR TO PCB**

Diameter of drilled hole: $1,1^{+0,1}$ mm

$L = (\text{No. of poles} + 1) \times \text{pin spacing}$