

## Data sheet

739-309

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE  
PIN SPACING 3.5 MM / 0.138 IN FRONT-ENTRY CAGE CLAMP CONNECTION**



## Technical data

Package size 140 4\*35 pieces.

Pin spacing from	3.5 mm
Pin spacing from	0.138 in
pole count	9
Cross section from [mm <sup>2</sup> ]	0.08 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	1.5 mm <sup>2</sup>
Cross section from [AWG]	28 AWG
Cross section to [AWG]	14 AWG
Voltage UL	300 V
Measured voltage EN	250 V
Measured shock voltage	2.5 kV
Pollution degree	2
Current intensity EN	6 A
Current UL	6 A
Weight	5.73 g
Color	grey
Wiring type	Front-entry
No. of connection Points	9
No. of potentials	9
Height	12.3 mm
Height	0.184 in
Width	33 mm
Width	1.3 in
Depth	13.4 mm

---

**Data sheet**

**739-309**

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE  
PIN SPACING 3.5 MM / 0.138 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

---

Depth	0.528 in
Strip length from	5 mm
Strip length to	6 mm
Strip length	0.22 in

---

**Data sheet**

739-309

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE  
PIN SPACING 3.5 MM / 0.138 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

---

<b>Approval</b>	<b>Voltage</b>	<b>Current</b>	<b>Approval number</b>	<b>Notes</b>
DEMKO	250	6	99-04230	
DEMKO	250	6	DK99-04230	
RMR	250	6	99.00007.250	
UL	300	6	E45172	

---

**Data sheet**

739-309

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE  
PIN SPACING 3.5 MM / 0.138 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

---

**Accessories****Item number**

SCREWDRIVER Type 1, bar (2,5 x 0,4) mm

210-119

SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 1, bar (2,5 x 0,4) mm

210-619


SELF-ADHESIVE MARKER STRIPS HEIGHT OF MARKER STRIP 3 MM

709-179

## Data sheet

739-309

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE**  
**PIN SPACING 3.5 MM / 0.138 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

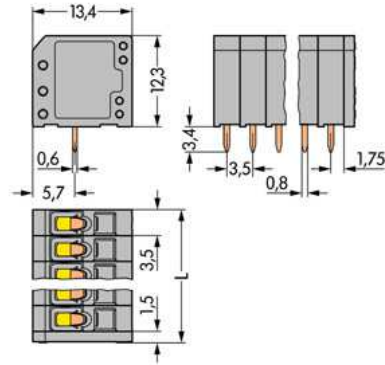

---

Data sheet

739-309

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE  
PIN SPACING 3.5 MM / 0.138 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

---

Diameter of drilled hole:  $1,1^{+0,1}$  mm  
 $L = (\text{No. of poles} \times \text{pin spacing}) + 1,5$  mm