
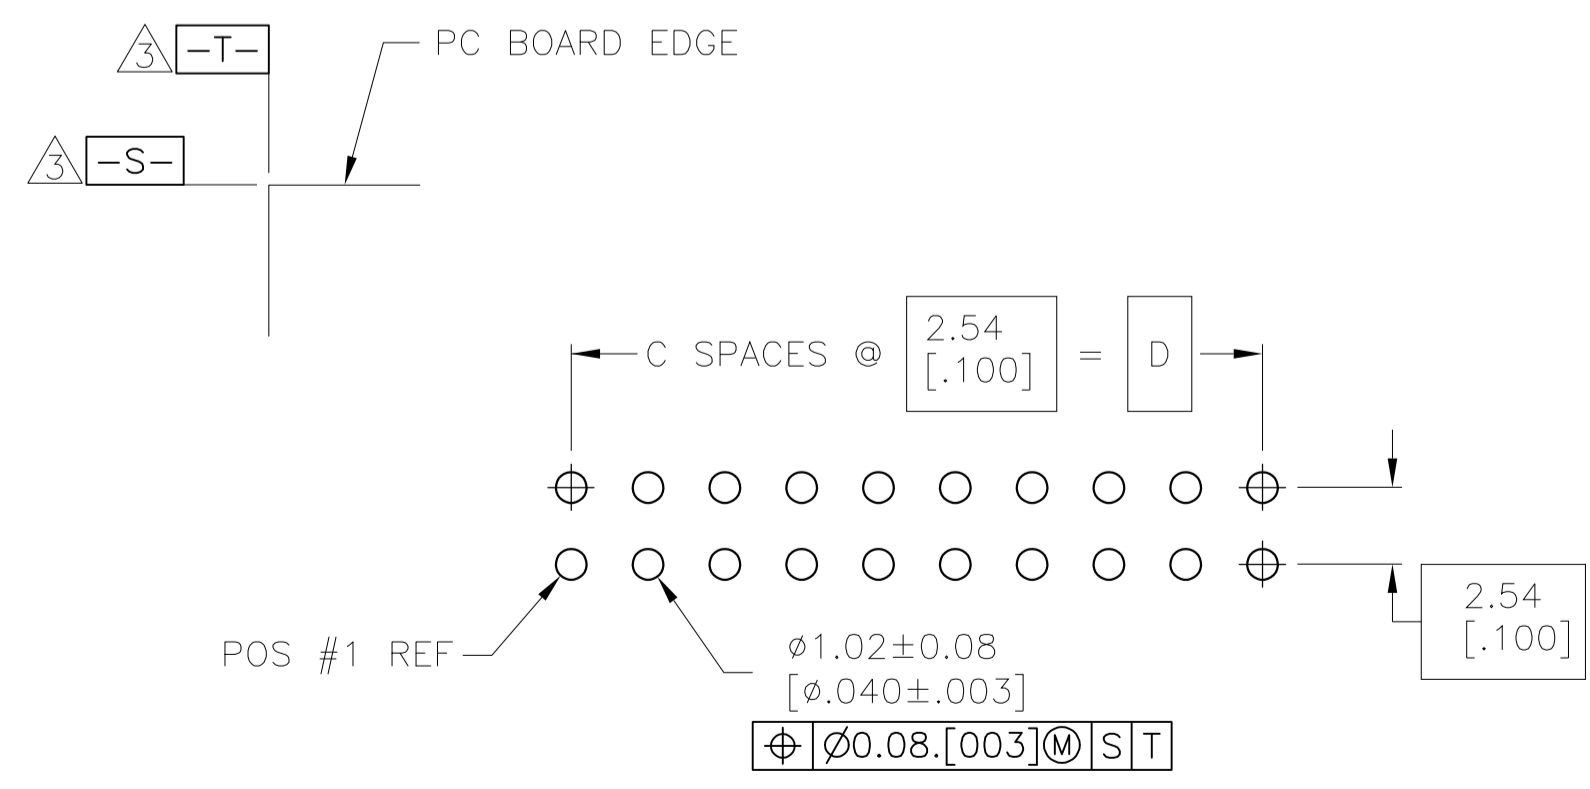


- △ HOUSING: PCT, UL94V-0, COLOR BLACK.
- △ POSTS: PHOSPHOR BRONZE.
- △ POSTS: 0.00038[.000015] MIN GOLD ON MATING AREA, 0.00254[.000100] MIN TIN ON SOLDER END, ALL OVER 0.00127[.000050] MIN NICKEL ON ENTIRE POST.
- △ DATUMS S & T TO BE ESTABLISHED BY CUSTOMER.
- △ NO KEYING SLOT ON THIS END FOR 6, 8, 10 & 14 POSITION ASSEMBLIES.
- △ NO KEYING SLOT ON THIS END FOR 6, 8 & 10 POSITION ASSEMBLIES.

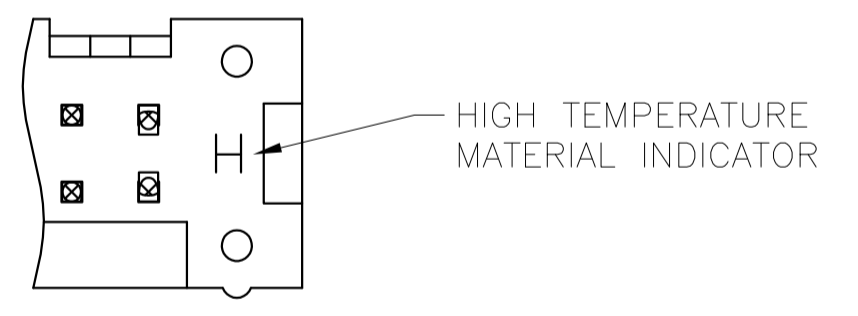

| | | | | | | | |
|----------|--|---------------|----|---------------|---------------|-----------|-------------|
| | | 78.74 [3.100] | 31 | 86.36 [3.400] | 88.90 [3.500] | 64 | 1-1761681-7 |
| OBSOLETE | | 73.66 [2.900] | 29 | 81.28 [3.200] | 83.82 [3.300] | 60 | 1-1761681-6 |
| | | 60.96 [2.400] | 24 | 68.58 [2.700] | 71.12 [2.800] | 50 | 1-1761681-5 |
| | | 48.26 [1.900] | 19 | 55.88 [2.200] | 58.42 [2.300] | 40 | 1-1761681-3 |
| | | 40.64 [1.600] | 16 | 48.26 [1.900] | 50.80 [2.000] | 34 | 1-1761681-1 |
| | | 30.48 [1.200] | 12 | 38.10 [1.500] | 40.64 [1.600] | 26 | 1761681-9 |
| OBSOLETE | | 27.94 [1.100] | 11 | 35.56 [1.400] | 38.10 [1.500] | 24 | 1761681-8 |
| | | 22.86 [.900] | 9 | 30.48 [1.200] | 33.02 [1.300] | 20 | 1761681-7 |
| | | 17.78 [.700] | 7 | 25.40 [1.000] | 27.94 [1.100] | 16 | 1761681-6 |
| | | 15.24 [.600] | 6 | 22.86 [.900] | 25.40 [1.000] | 14 | 1761681-5 |
| | | 10.16 [.400] | 4 | 17.78 [.700] | 20.32 [.800] | 10 | 1761681-3 |
| OBSOLETE | | 7.62 [.300] | 3 | 15.24 [.600] | 17.78 [.700] | 8 | 1761681-2 |
| | | 5.08 [.200] | 2 | 12.70 [.500] | 15.24 [.600] | 6 | 1761681-1 |
| | | D | C | B | A | NO OF POS | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

APPROVED: J. GERACE, S. BOLASH, M. WALMSLEY

TE Connectivity

HEADER ASSEMBLY, VERTICAL, LOW PROFILE, IDC

SIZE: A1, CAGE CODE: 00779, DRAWING NO: 1761681

SCALE: 4:1, SHEET: 1 OF 1, REV: A1