


Data sheet

293-533/001-000

**INSULATED TERMINAL BLOCK WITH ONE SNAP-IN MOUNTING FOOT EACH PER POLE
WITH STANDARD MARKING PUSH BUTTON ON ONE SIDE (WHITE SIDE)
PUSH-WIRE CONNECTION**

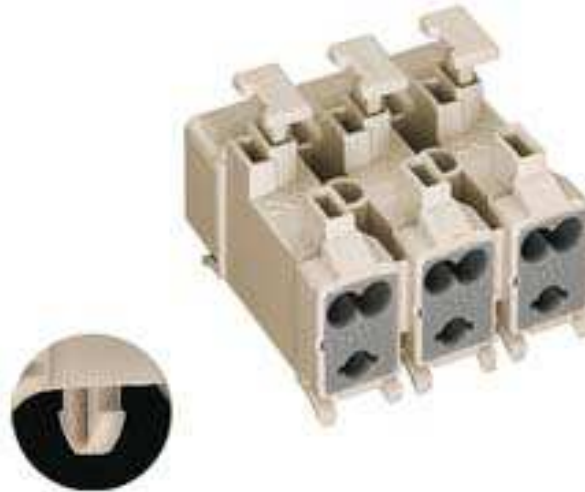

Technical data

Package size 500 pieces.

pole count	3
Cross section from [mm ²]	0.5 mm ²
Cross section to [mm ²]	1.5 mm ²
Cross section from [AWG]	20 AWG
Cross section to [AWG]	16 AWG
Wiring method	e
Number of strands	2
Voltage UL	300 V
Current UL	10 A
Cross section from [mm ²]	0.5 mm ²
Cross section to [mm ²]	2.5 mm ²
Cross section from [AWG]	20 AWG
Cross section to [AWG]	14 AWG
Wiring method	e
Number of strands	2
Measured voltage EN	400 V
Measured shock voltage	4 kV
Pollution degree	2
Current intensity EN	24 A
Weight	9.307 g
Color	white
Wiring type	Side-entry
No. of connection Points	12

Data sheet**293-533/001-000****INSULATED TERMINAL BLOCK WITH ONE SNAP-IN MOUNTING FOOT EACH PER
POLE
WITH STANDARD MARKING PUSH BUTTON ON ONE SIDE (WHITE SIDE)
PUSH-WIRE CONNECTION**

No. of potentials	3
Height	20.8 mm
Height	0.819 in
Width	28.5 mm
Width	1.122 in
Depth	29 mm
Depth	1.142 in
Strip length from	8 mm
Strip length to	9 mm
Strip length	0.33 in

Data sheet

293-533/001-000

**INSULATED TERMINAL BLOCK WITH ONE SNAP-IN MOUNTING FOOT EACH PER POLE
WITH STANDARD MARKING PUSH BUTTON ON ONE SIDE (WHITE SIDE)
PUSH-WIRE CONNECTION**

Approval	Voltage	Current	Approval number	Notes
KEMA	400	18	97.2381.01	
SEMKO	400	18	963302001	
UL	300	10	E45172	

Data sheet

293-533/001-000

**INSULATED TERMINAL BLOCK WITH ONE SNAP-IN MOUNTING FOOT EACH PER POLE
WITH STANDARD MARKING PUSH BUTTON ON ONE SIDE (WHITE SIDE)
PUSH-WIRE CONNECTION**


Accessories**Item number**

PIN TERMINALS INSULATED	209-160
PIN TERMINALS INSULATED	209-161
PIN TERMINALS INSULATED	209-162
PINS FOR PLATE THICKNESS 1 MM / 0.039 IN	271-702
PINS FOR PLATE THICKNESS 1 MM / 0.039 IN	271-711
PINS FOR PLATE THICKNESS 1.5 MM / 0.059 IN	271-712
SCREWDRIVER Type 1, bar (2,5 x 0,4) mm	210-119
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 1, bar (2,5 x 0,4) mm	210-619
SYRINGE CONTENT: 20 ml ALU-PLUS CONTACT PASTE	249-130

Data sheet

293-533/001-000

**INSULATED TERMINAL BLOCK WITH ONE SNAP-IN MOUNTING FOOT EACH PER POLE
WITH STANDARD MARKING PUSH BUTTON ON ONE SIDE (WHITE SIDE)
PUSH-WIRE CONNECTION**

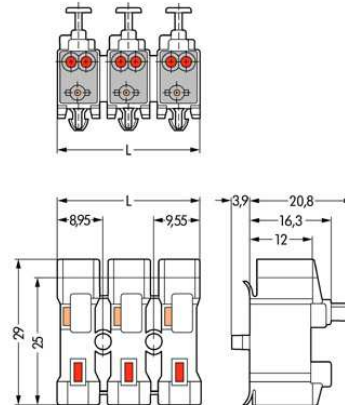

Data sheet

293-533/001-000

**INSULATED TERMINAL BLOCK WITH ONE SNAP-IN MOUNTING FOOT EACH PER POLE
WITH STANDARD MARKING PUSH BUTTON ON ONE SIDE (WHITE SIDE)
PUSH-WIRE CONNECTION**

No. Of poles		Dim. L (mm)
2	18,5	
3	28,5	
4	38,5	
5	48,5	