DEUTSCH | DEUTSCH DT

TE Internal #: DT06-6S-C017 6 Position Housing, Housing for Female Terminals, Wire-to-Wire, 4.44 mm [.175 in] Centerline, Sealable, Gray, Wire & Cable, Power, DEUTSCH DT

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DT Plug Connectors



Number of Positions: 6

Connector & Housing Type: Housing for Female Terminals

Mating Pin Diameter: 1.59 mm [.063 in]

Connector System: Wire-to-Wire

Centerline (Pitch): 4.44 mm [.175 in]

All DEUTSCH DT Plug Connectors (204)



Features

Industry Standards

IP Rating	IP6K9K, IP68			
Compatible With Agency/Standards Products	SAE J2030			
UL Flammability Rating	12mm Flame Test per Standard UL-94			
Dimensions				
Row-to-Row Spacing	4.45 mm[.175 in]			
Product Width	20.83 mm[.82 in]			
Product Length	33.48 mm[1.318 in]			
Connector Height	24.03 mm[.946 in]			
Packaging Features				
Packaging Quantity	800			
Packaging Method	Box			
Mechanical Attachment				

C For support call+1 800 522 6752

6 Position Housing, Housing for Female Terminals, Wire-to-Wire, 4.44 mm [.175 in] Centerline, Sealable, Gray, Wire & Cable, Power, DEUTSCH DT



Strain Relief	Add By Accessory	
Terminal Position Assurance	Yes	
Mating Alignment Type	Polarized	
Mating Alignment	With	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Other		
Serviceable	Yes	
Connector Position Assurance Capable	No	
EU RoHS Compliance	Compliant	
EU ELV Compliance	Compliant	
Electrical Characteristics		
Operating Voltage	250 VDC	
Nominal Voltage Architecture	250 V	
Body Features		
Cable Exit Angle	180°	

Gray

Primary Product Color

Housing Features

Housing Material	PAGF
Centerline (Pitch)	4.44 mm[.175 in]
Contact Features	
Contact Size	Size 16
Contact Type	Socket
Mating Pin Diameter	1.59 mm[.063 in]
Contact Current Rating (Max)	13 A
Product Type Features	
Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable

6 Position Housing, Housing for Female Terminals, Wire-to-Wire, 4.44 mm [.175 in] Centerline, Sealable, Gray, Wire & Cable, Power, DEUTSCH DT



Configuration Features

Blank Cavity Position	5, 4, 1, 6, 3, 2	
Connector Modification	Solid Rear Grommet, End Cap	
Number of Positions	6	
Number of Rows	2	
Usage Conditions		
Operating Temperature (Max)	125 °C[257 °F]	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]	
Operation/Application		
Circuit Application	Power	
Product Compliance For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241)	

Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Not reviewed for solder process capability

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

6 Position Housing, Housing for Female Terminals, Wire-to-Wire, 4.44 mm [.175 in] Centerline, Sealable, Gray, Wire & Cable, Power, DEUTSCH DT








Also in the Series DEUTSCH DT



Automotive connector	LUCKSU
Position Assurance(90)	

Connector Strain Relief(31)	Insertion & Extraction Tools(3)	Other Automotive Connector Accessories(28)	Rectangular Backshells & Clamps(3)

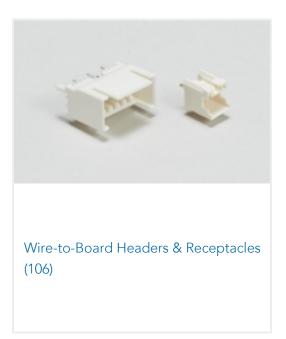


Customers Also Bought

C For support call+1 800 522 6752

6 Position Housing, Housing for Female Terminals, Wire-to-Wire, 4.44 mm [.175 in] Centerline, Sealable, Gray, Wire & Cable, Power, DEUTSCH DT



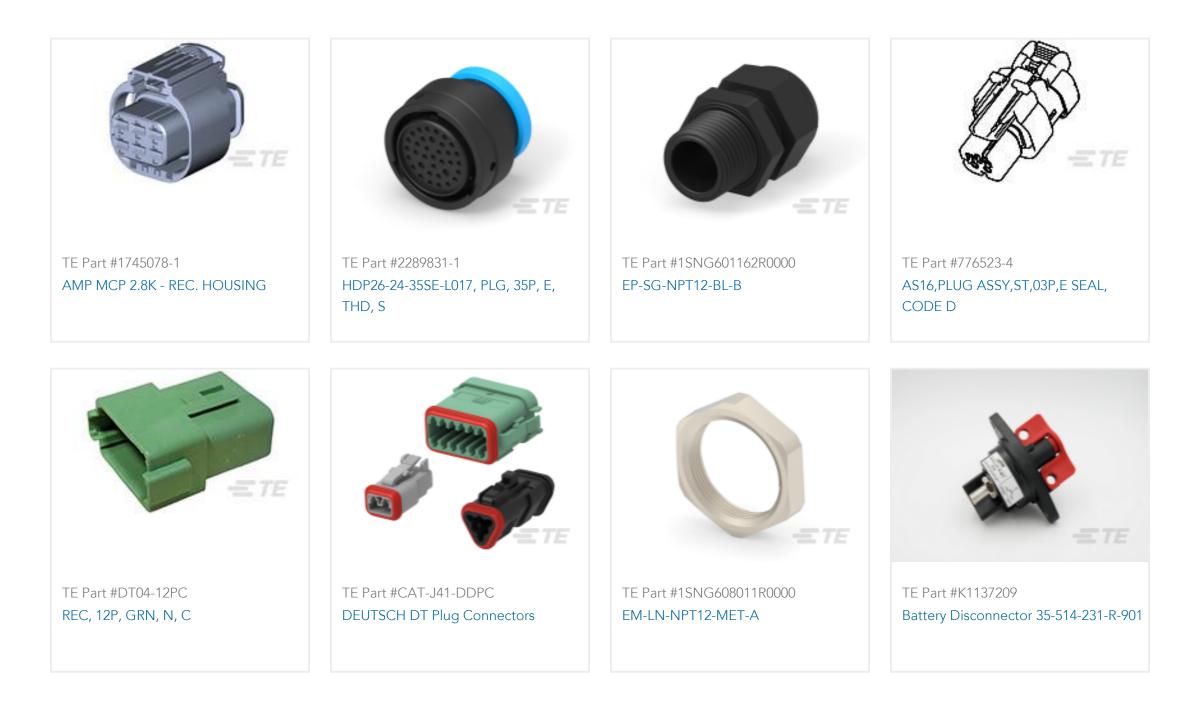

Documents

Product Drawings PLG, 6P, GRY, BLOCKED

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_DT06-6S-C017_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_DT06-6S-C017_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DT06-6S-C017_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages TERMINALS AND CONNECTORS

English

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

& For support call+1 800 522 6752

6 Position Housing, Housing for Female Terminals, Wire-to-Wire, 4.44 mm [.175 in] Centerline, Sealable, Gray, Wire & Cable, Power, DEUTSCH DT



Application Specification

English

Agency Approvals

UL Report

English