

See below: Approvals and Compliances

Stock-Check, Detailed request for product

Weblinks

Description

- Solder :

- Screw-on mounting , rear-side
- Low Voltage DC Plug and Socket
- DC Plug: 2-pole , straight

Technical Data

Diameter	6.3 mm / 2.0 mm		
Number of Poles	2-pole		
Ratings DC	0.5 A / 12 VDC		
Dielectric Strength	500 VDC		
Insulation Resistance	> 100 MΩ @ 500 VDC		

-20 °C to 70 °C	
solder terminal silver plated	
Screw-on mounting wall thickness max. 5.5 mm	
straight	
5000 Insertions	

pdf data sheet, html datasheet, General Product Information, Distributor-

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.


Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
RoHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
50	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

4840.2200

Dimensions [mm]

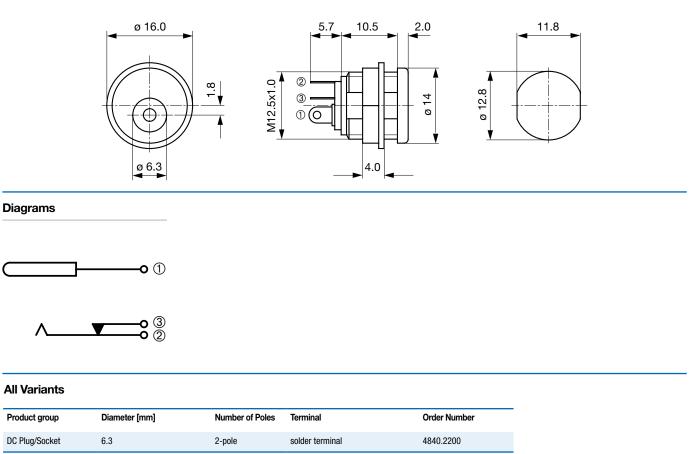

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Packaging unit

250 Pcs

Mating Inlets/Plugs

Category / Description



DC Plugs / Sockets Overview complete

, solder terminal, Plug, 5.5 mm, 2-pole, DC Plug/Socket	4840.1200
, Cable, Plug, 5.5 mm, 2-pole, DC Plug/Socket	4840.5200
, Cable, Plug, 5.5 mm, 2-pole, DC Plug/Socket	4840.5201