

Apacer

The Most **Reliable**
Storage For Industries

SV25P-25



SV25P-25

Overview

Apacer's SV25P-25 is a well-balanced solid-state disk (SSD) drive with standard form factor and great performance. Designed in SATA 6 Gb/s interface, SV25P-25 provides full compliance with the latest SATA Revision 3.2 interface specifications and delivers exceptional read/write speed, making it the ideal companion for heavy-loading industrial or server operations.

SV25P-25 utilizes 3D NAND for higher capacity up to 960GB and provides more power efficiency than 2D NAND. Regarding reliability, SV25P-25 is built with a powerful SATA controller that supports on-the-module ECC as well as efficient wear leveling scheme and implemented with LDPC (Low Density Parity Check) ECC engine to extend SSD endurance and increase data reliability.

Furthermore, SV25P-25 is equipped with a built-in thermal sensor to monitor the temperature of the SSD via S.M.A.R.T commands to prevent overheating. Operating under 6 Gb/s interface, SV25P-25 is provided with Apacer latest S.M.A.R.T. that is primarily oriented for the latest SATA interface SSD, for drive lifetime monitoring and analysis. For highly-intensive applications, End-to-End Data Protection ensures that data integrity can be assured at multiple points in the path to enable reliable delivery of data transfers.




Feature

- Low-Density Parity-Check (LDPC) Code
- Global Wear Leveling
- Flash bad-block management
- Flash Translation Layer: Page Mapping
- S.M.A.R.T.
- ATA Secure Erase
- Device Sleep
- TRIM
- Hyper Cache Technology
- Over-Provisioning
- DataRAID™
- SMART Read Refresh™
- CorePower

Specifications

Model	SV25P-25
Interface	SATA 3.2 (6Gb/s)
Connector	(7+15) pin male
Form Factor	2.5"
NAND Flash Type	3D TLC
Capacity	120GB~960GB
External DRAM	No
Sustained Read Performance (MB/sec)	Up to 550
Sustained Write Performance (MB/sec)	Up to 500
ECC Engine	Low-Density Parity-Check (LDPC) Code
IOPS (4K Random Write)	66K
Standard Operating Temperature (°C)	0 ~ + 70
Wide Temperature (°C)	-40 ~ + 85
Storage Temperature (°C)	-40 ~ + 100
Thermal sensor	Yes
Shock	Operating: Acceleration, 50(G)/11(ms)/half sine (compliant with MIL-STD-202G) Non-operating: Acceleration, 1500(G)/0.5(ms)/half sine (compliant with MIL-STD-883K)
Vibration	Operation:7.69 Grms, 20~2000 Hz/random (compliant with MIL-STD-810G) Non-operation:4.02 Grms, 15~2000 Hz/random (compliant with MIL-STD-810G)
Operating Voltage	3.3 V ± 5%
Power Consumption	Active mode: 280 mA / Idle mode: 50 mA
Dimension (L x W x H)	100.00 x 69.85 x 6.90 mm
MTBF (hours)	>3,000,000

Mechanical Specification

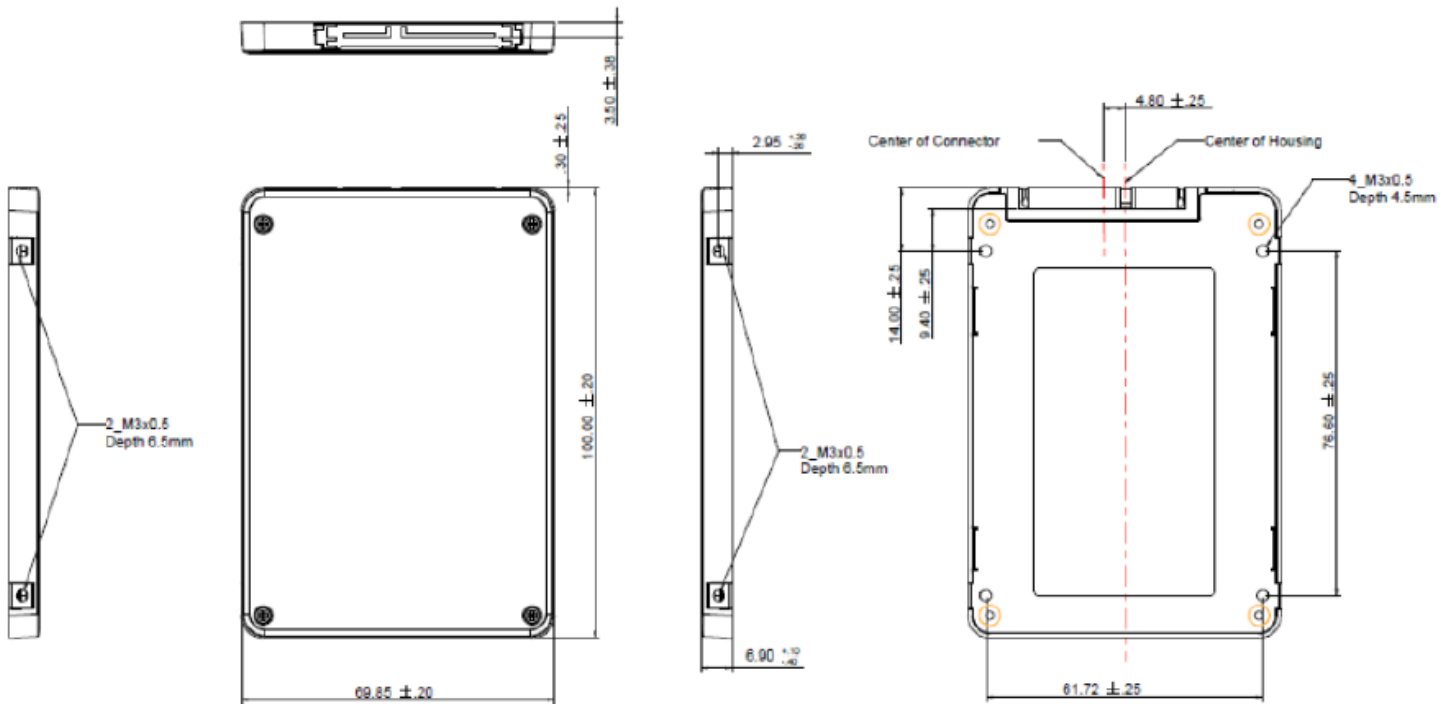

Unit: mm

For more information,
contact your Apacer representative

Global Presence

Taiwan (Headquarters)
Apacer Technology Inc.
Tel: +886-2-2267-8000
Fax: +886-2-2267-2261

Europe
Apacer Technology B.V.
Tel: +31-40-267-0000
Fax: +31-40-290-0686

U.S.A.
Apacer Memory America, Inc.
Tel: +1-408-518-8699
Fax: 1-510-249-9551

Shanghai
Apacer Electronic(Shanghai)
Co., Ltd.
Tel: +86-21-6228-9939

Japan
Apacer Technology Corp.
Tel: +81-3-5419-2668
Fax: +81-3-5419-0018

India
Apacer Technologies Pvt. Ltd.
Tel: +91-80-41529061~3
Fax: +91-80-41700215