



Pushing Performance
Since 1945

D-Sub 9P metpl hood 1str-ent kn 4-40 I

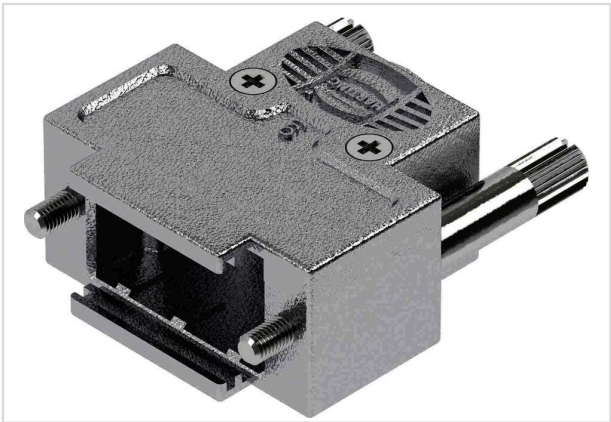


Image is for illustration purposes only. Please refer to product description.

Part number	09 67 009 0433 160
Specification	D-Sub 9P metpl hood 1str-ent kn 4-40 I
HARTING eCatalogue	https://harting.com/09670090433160

Identification

Category	Hoods / Housings
Series	D-Sub
Type of hood/housing	Shell housing
Description of hood/housing	Cover can be screwed on

Version

Size	D-Sub 1
Shielding	Shielded
Version	Top entry
Number of cable entries	1
Cable entry	1x
Cable fixing	Cable clamp
Locking type	With long locking screws Thread 4-40 UNC
2 parts	Yes
Separable	Yes

Technical characteristics

Tightening torque	0.25 Nm Cable clamp screw
	0.25 Nm cover screw
	0.4 Nm Locking screw
Ambient temperature	-20 ... +90 °C
Degree of protection acc. to IEC 60529	IP30
Cable diameter	1.5 ... 7.5 mm



Pushing Performance
Since 1945

Material properties

Material (hood/housing)	Thermoplastic
Surface (hood/housing)	Metallised
Length	30.7 mm
Width	31.5 mm
Height	15.2 mm
RoHS	compliant with exemption
RoHS exemptions	6(a)-I: Lead as an alloying element in steel for machining purposes containing up to 0,35 % lead by weight
	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Yes
REACH SVHC substances	Lead
ECHA SCIP number	c3c36a64-4181-41a7-bdc6-2bc2fd6fd011
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead

Commercial data

Packaging size	100
Net weight	17 g
Country of origin	China
European customs tariff number	85389099
GTIN	5713140222113
eCl@ss	27440213 D-Sub hood
ETIM	EC001133
UNSPSC 24.0	39121416