



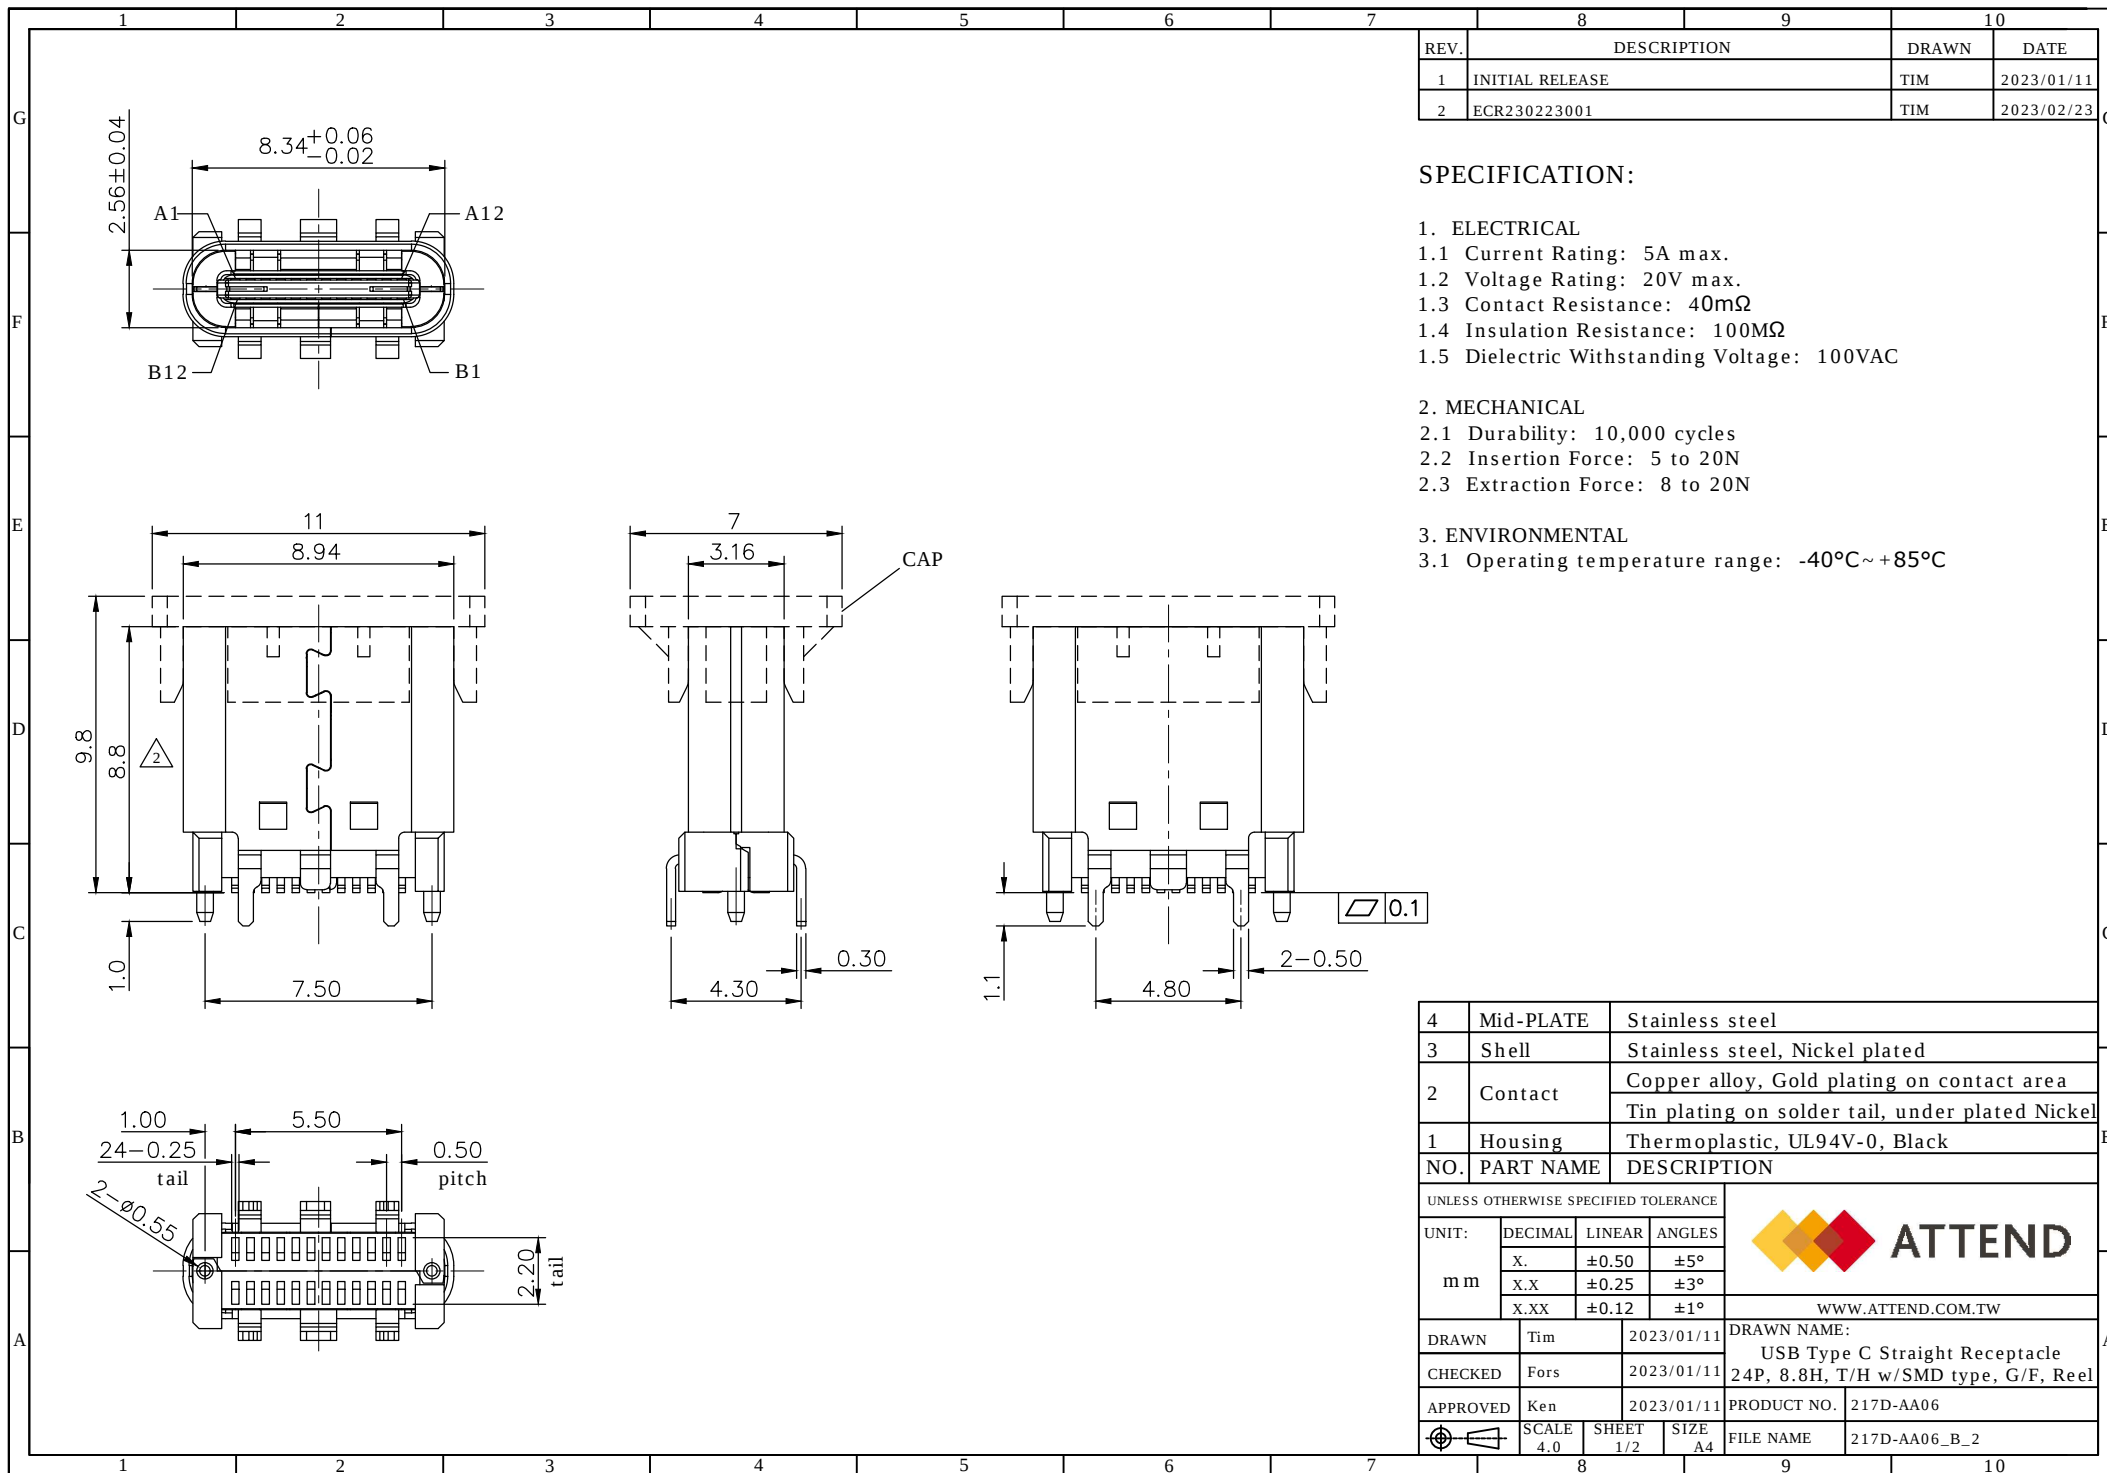

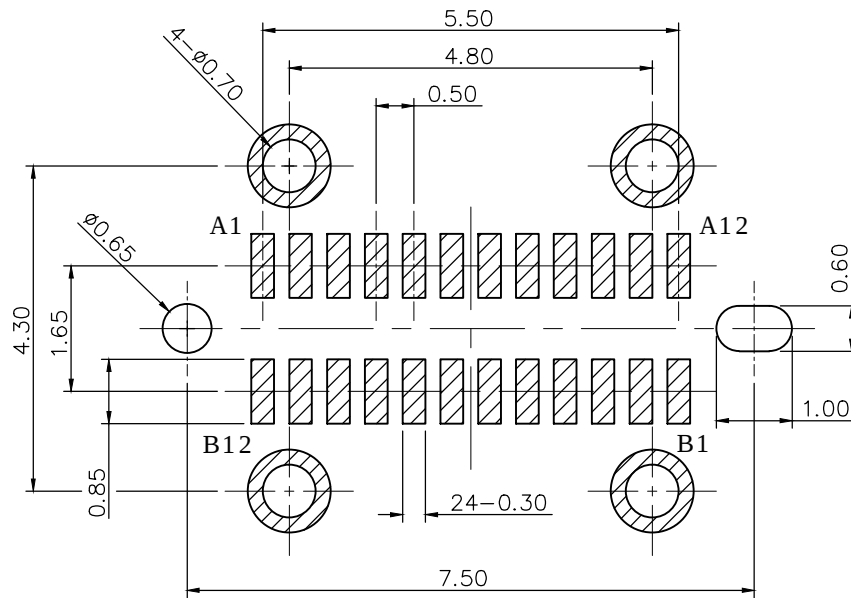

RECOMMENDED LAYOUT (TOP VIEW)
GENERAL TOLERANCE: $\pm 0.05\text{mm}$

REV.	DESCRIPTION	DRAWN	DATE
	SEE SHEET ONE		

PIN ASSIGNMENTS:

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

UNLESS OTHERWISE SPECIFIED TOLERANCE

UNIT:	DECIMAL	LINEAR	ANGLES
m m	X.	± 0.50	$\pm 5^\circ$
	X.X	± 0.25	$\pm 3^\circ$
	X.XX	± 0.12	$\pm 1^\circ$



WWW.ATTEND.COM.TW

DRAWN	Tim	2023/01/11	DRAWN NAME:
CHECKED	Fors	2023/01/11	USB Type C Straight Receptacle
APPROVED	Ken	2023/01/11	24P, 8.8H, T/H w/SMD type, G/F, Reel
SCALE	4.0	SHEET	2/2
SIZE	A4	PRODUCT NO.	217D-AA06
FILE NAME	217D-AA06_B_2		