


# Quectel FME164Q

2 × 2 + 2 × 2 MIMO

M.2 2230 KEY-E Package

Wi-Fi 6 & Bluetooth 5.3 Module

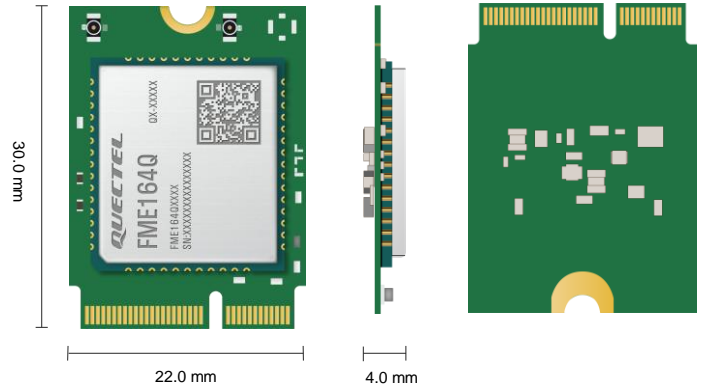

FME164Q is a high-performance Wi-Fi 6 and Bluetooth 5.3 module launched by Quectel, which can be used for WLAN and Bluetooth connections. With its compact size of 22.0 mm × 30.0 mm × 4.0 mm, the module fits into the M.2 2230 KEY-E package and is easy to integrate into the host device. It can also effectively lower production costs, increase production efficiency, and fulfill the demands of complicated environments.

With support for multi-link operation (MLO), FME164Q enables several links between Wi-Fi 6 devices to be transmitted and received over a single channel, with each channel supporting up to 1024 QAM. FME164Q operates simultaneously on 2.4 GHz and 5 GHz, and supports 2 × 2 + 2 × 2 MIMO and DBS (Dual Band Simultaneous), delivering a maximum physical layer data transmission rate of 1774.5 Mbps.

Based on a reliable PCIe 3.0 interface, FME164Q achieves low-power and high-speed data transmission. Coupled with its higher power consistency and accuracy and ultra-wide temperature range, the module can meet the requirements of industries, consumer goods and laptop applications.



## Key Features

- ✓ 2.4 GHz/ 5 GHz Wi-Fi bands and Bluetooth 5.3
- ✓ Dual Band Simultaneous (DBS)
- ✓ PCIe 3.0 interface that supports higher data transmission rate and enables lower power consumption
- ✓ Fast time-to-market: simple design minimizes design-in time and development efforts
- ✓ Wide operating temperature range: -30 °C to +65 °C



IEEE 802.11  
a/b/g/n/ac/ax



Bluetooth 5.3



M.2 Package



PCIe 3.0  
Interface



DBS



Operating  
Temperature Range:  
-30 °C to +65 °C

Wi-Fi 6 & Bluetooth 5.3 FME164Q	
WLAN Protocol	IEEE 802.11a/b/g/n/ac/ax
Wi-Fi Frequency Band	2.4 GHz/ 5 GHz
Wi-Fi Antenna	2 × 2 + 2 × 2 MIMO
Wi-Fi Modulation Mode	DBPSK/ DQPSK/ CCK/ BPSK/ QPSK/ 16QAM/ 64QAM/ 256QAM/ 1024QAM
2.4 GHz Channel Bandwidth	20/ 40 MHz
5 GHz Channel Bandwidth	20/ 40/ 80 MHz
DBS	Supported
Encryption Mode	WPA3
Wi-Fi Operating Mode	AP/ STA
Bluetooth Standard	Bluetooth 5.3
BLE Feature	LE Audio, 2M PHY, BLE Long Range
Dimensions	22.0 mm × 30.0 mm × 4.0 mm
Weight	Approx. 3.22 g
Temperature Range	
Operating Temperature	-30 °C to +65 °C
Storage Temperature	-40 °C to +85 °C
Physical Rate (Max.)	
802.11a	54 Mbps
802.11b	11 Mbps
802.11g	54 Mbps
802.11n	600 Mbps
802.11ac	866 Mbps
802.11ax	1774.5 Mbps
Interfaces	
PCIe 3.0	× 1 (for Wi-Fi)
PCM	× 1 (for Bluetooth)
UART	× 1 (for Bluetooth)
Special Pins	WLAN_EN, BT_EN
Wi-Fi Antenna Interface	× 1 (ANT_WIFI1)
Wi-Fi/Bluetooth Antenna Interface	× 1 (ANT_WIFI0/BT)
Electrical Characteristics	
Power Supply Voltage	VCC: 3.0–3.6 V, typ. 3.3 V
Certifications	
Regulatory (Planning)	Europe: CE
	America: FCC
	Canada: IC
	China: SRRC
	South Korea: KC
	Japan: JATE/ TELEC
Australia/New Zealand: RCM	

Wi-Fi 6 & Bluetooth 5.3FME164Q

Wi-Fi Performance

		Receiver Sensitivity	Transmit Power
2.4 GHz	802.11b/11 Mbps	-88 dBm ±2 dB	17 dBm ±2 dB
	802.11g/54 Mbps	-74 dBm ±2 dB	14.5 dBm ±2 dB
	802.11n/HT20 MCS 7	-73 dBm ±2 dB	13.5 dBm ±2 dB
	802.11n/HT40 MCS 7	-71 dBm ±2 dB	13 dBm ±2 dB
	802.11ax/HE20 MCS 11	-63 dBm ±2 dB	11 dBm ±2 dB
	802.11ax/HE40 MCS 11	-60 dBm ±2 dB	10 dBm ±2 dB
5 GHz	802.11a/54 Mbps	-72 dBm ±2 dB	13 dBm ±2 dB
	802.11n/HT20 MCS 7	-72 dBm ±2 dB	12 dBm ±2 dB
	802.11n/HT40 MCS 7	-70 dBm ±2 dB	11.5 dBm ±2 dB
	802.11ac/VHT20 MCS 8	-69 dBm ±2 dB	11.5 dBm ±2 dB
	802.11ac/VHT40 MCS 9	-65 dBm ±2 dB	10.5 dBm ±2 dB
	802.11ac/VHT80 MCS 9	-61 dBm ±2 dB	10 dBm ±2 dB
	802.11ax/HE20 MCS 11	-62 dBm ±2 dB	9.5 dBm ±2 dB
	802.11ax/HE40 MCS 11	-60 dBm ±2 dB	9.5 dBm ±2 dB
	802.11ax/HE80 MCS 11	-57 dBm ±2 dB	8.5 dBm ±2 dB

Bluetooth Performance

	Receiver Sensitivity	Transmit Power
GFSK	-94 dBm ±2 dB	7 dBm ±2 dB
EDR (π/4-DQPSK)	-92 dBm ±2 dB	3.5 dBm ±2 dB
EDR (8-DQPSK)	-87 dBm ±2 dB	3.5 dBm ±2 dB
BLE (1 Mbps)	-97 dBm ±2 dB	6.5 dBm ±2 dB
BLE (2 Mbps)	-95 dBm ±2 dB	6.5 dBm ±2 dB

Model	Ordering Code	Antenna	DBS	Coexistence with Cellular Module	Development Kit (Only for Debugging)
FME164Q	FME164QAAMD	Two antennas	Supported	-	RK3568-WF-EVB-KIT
FME164Q	FME164QABMD	Two antennas	Supported	Supported	RK3568-WF-EVB-KIT

NOTE:  
1. The development kit (RK3568-WF-EVB kit) is for early debugging.  
2. Contact local sales or FAE for ordering.