


## Data sheet

736-202

**TRIPLE DECK PCB TERMINAL STRIP 2 SOLDER PINS STAGGERED BY HALF THE PIN SPACING  
PIN SPACING 5 MM / 0.197 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

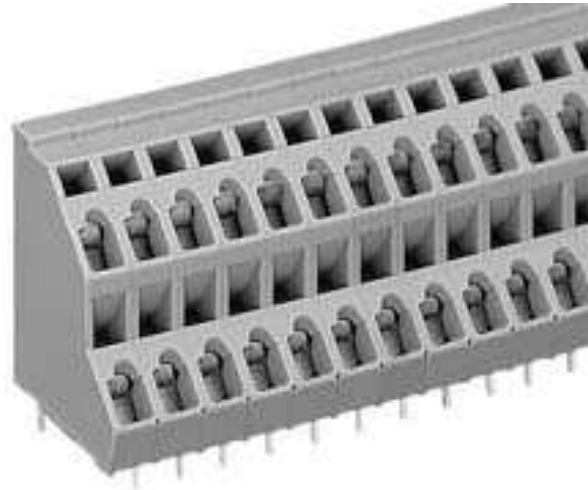

## Technical data

Package size 161 pieces.

Pin spacing from	5 mm
Pin spacing from	0.197 in
pole count	2
Cross section from [mm <sup>2</sup> ]	0.08 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	2.5 mm <sup>2</sup>
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Voltage UL	300 V
Voltage CSA	300/600 V
Current UL	10 A
Current CSA	10 A
Measured voltage EN	250 V
Measured shock voltage	4 kV
Pollution degree	3
Current intensity EN	12 A
Measured voltage EN	500 V
Measured shock voltage	4 kV
Pollution degree	2
Current intensity EN	12 A
Weight	4.9 g
Color	grey
Wiring type	Angled Type
No. of connection Points	4

---

**Data sheet**

736-202

**TRIPLE DECK PCB TERMINAL STRIP 2 SOLDER PINS STAGGERED BY HALF  
THE PIN SPACING  
PIN SPACING 5 MM / 0.197 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

---

No. of potentials	4
Height	26.5 mm
Height	1.04 in
Width	11 mm
Width	0.433 in
Depth	21 mm
Depth	0.827 in
Strip length from	5 mm
Strip length to	6 mm
Strip length	0.22 in

---

**Data sheet**

736-202

**TRIPLE DECK PCB TERMINAL STRIP 2 SOLDER PINS STAGGERED BY HALF THE PIN SPACING  
PIN SPACING 5 MM / 0.197 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

---

Approval	Voltage	Current	Approval number	Notes
BBJ	250	12	B/12/697/03	
BV	250	12	11915/A0	
CCA	250	12	DK2079	
CSA	300/600	10	18677-46	
CSM	250	12	017956	
DEMKO	250	12	99-04356	
DNV	250	12	E6998	
GL	250	12	17296-00HH	
RMR	250	12	99.00007.250	
RosTesT	250	12	B09523	
UL	300	10	E45172	

## Data sheet

736-202

**TRIPLE DECK PCB TERMINAL STRIP 2 SOLDER PINS STAGGERED BY HALF THE PIN SPACING  
PIN SPACING 5 MM / 0.197 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

---

### Accessories


### Item number

Jumper GDS RM 5mm	Jumper PCB Spacing 5mm
Jumper GDS RM 7,5mm	Jumper PCB Spacing 7.5mm
OPERATING STICKER FOR PCB TERMINAL BLOCKS Profile PCB 236, 255, 256	210-406 Profile PCB 236, 255, 256
Profile PCB 257, 736, 737, 738	Profile PCB 257, 736, 737, 738
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-257
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-258
SCREWDRIVER Type 2, bar (3,5 x 0,5) mm	210-120
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm	210-620
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-161
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-162
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-163
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-164

## Data sheet

736-202

**TRIPLE DECK PCB TERMINAL STRIP 2 SOLDER PINS STAGGERED BY HALF THE PIN SPACING  
PIN SPACING 5 MM / 0.197 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

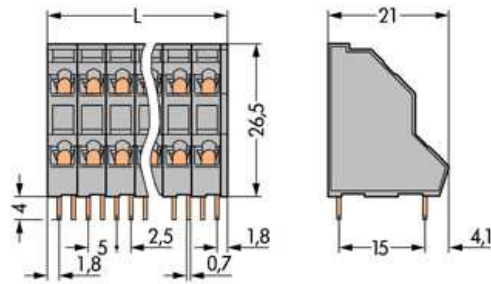

---

Data sheet

736-202

**TRIPLE DECK PCB TERMINAL STRIP 2 SOLDER PINS STAGGERED BY HALF  
THE PIN SPACING  
PIN SPACING 5 MM / 0.197 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

---

Diameter of drilled hole:  $1,3^{+0,1}$  mm

$L = (\text{No. of poles} \times \text{pin spacing}) + 1 \text{ mm}$