

Valve connectors - SACC-V-4CON-PG9/A - 1527883


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Valve connector, 4-pos., type A, unconnected, screw connection, cable screw connection Pg9



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 980955
Weight per Piece (excluding packing)	25.3 g
Custom tariff number	85366990
Country of origin	Hungary

Technical data

Dimensions

External diameter	6 mm ... 8 mm
-------------------	---------------

Ambient conditions

Ambient temperature (operation)	-30 °C ... 100 °C (connector)
Degree of protection	IP65

General

Rated current at 40°C	10 A
Rated voltage	250 V
Number of positions	4
Contact resistance	≤ 15 mΩ
Insulation resistance	≥ 100 MΩ
Status display	No
Protective circuit/component	Unwired
Overvoltage category	II
Pollution degree	3
Connection method	Screw connection
Conductor cross section	0.34 mm² ... 1.5 mm²

Valve connectors - SACC-V-4CON-PG9/A - 1527883

Technical data

General

AWG conductor cross section	22 ... 16
-----------------------------	-----------

Material

Flammability rating according to UL 94	HB
Valve plug contact material	CuSn
Valve plug contact surface material	Ni
Valve plug contact insert material	PA6
Material housing valve plug	PA6
Sealing material	NBR (Flat gasket)
	TPE (Screw connection)

Classifications

eCl@ss

eCl@ss 4.0	27140815
eCl@ss 4.1	27140815
eCl@ss 5.0	27143423
eCl@ss 5.1	27143423
eCl@ss 6.0	27143423
eCl@ss 7.0	27449001
eCl@ss 8.0	27440104

ETIM

ETIM 2.0	EC001121
ETIM 3.0	EC002062
ETIM 4.0	EC002062
ETIM 5.0	EC002062

UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501

Approvals

Approvals

Approvals

UL Recognized / EAC


Valve connectors - SACC-V-4CON-PG9/A - 1527883

Approvals

Ex Approvals


Approvals submitted

Approval details

UL Recognized 	
Nominal current I _N	10 A
Nominal voltage U _N	250 V
EAC	

Drawings

Dimensional drawing

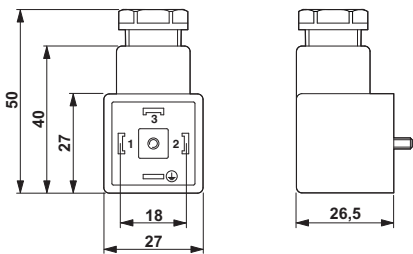

Circuit diagram

