


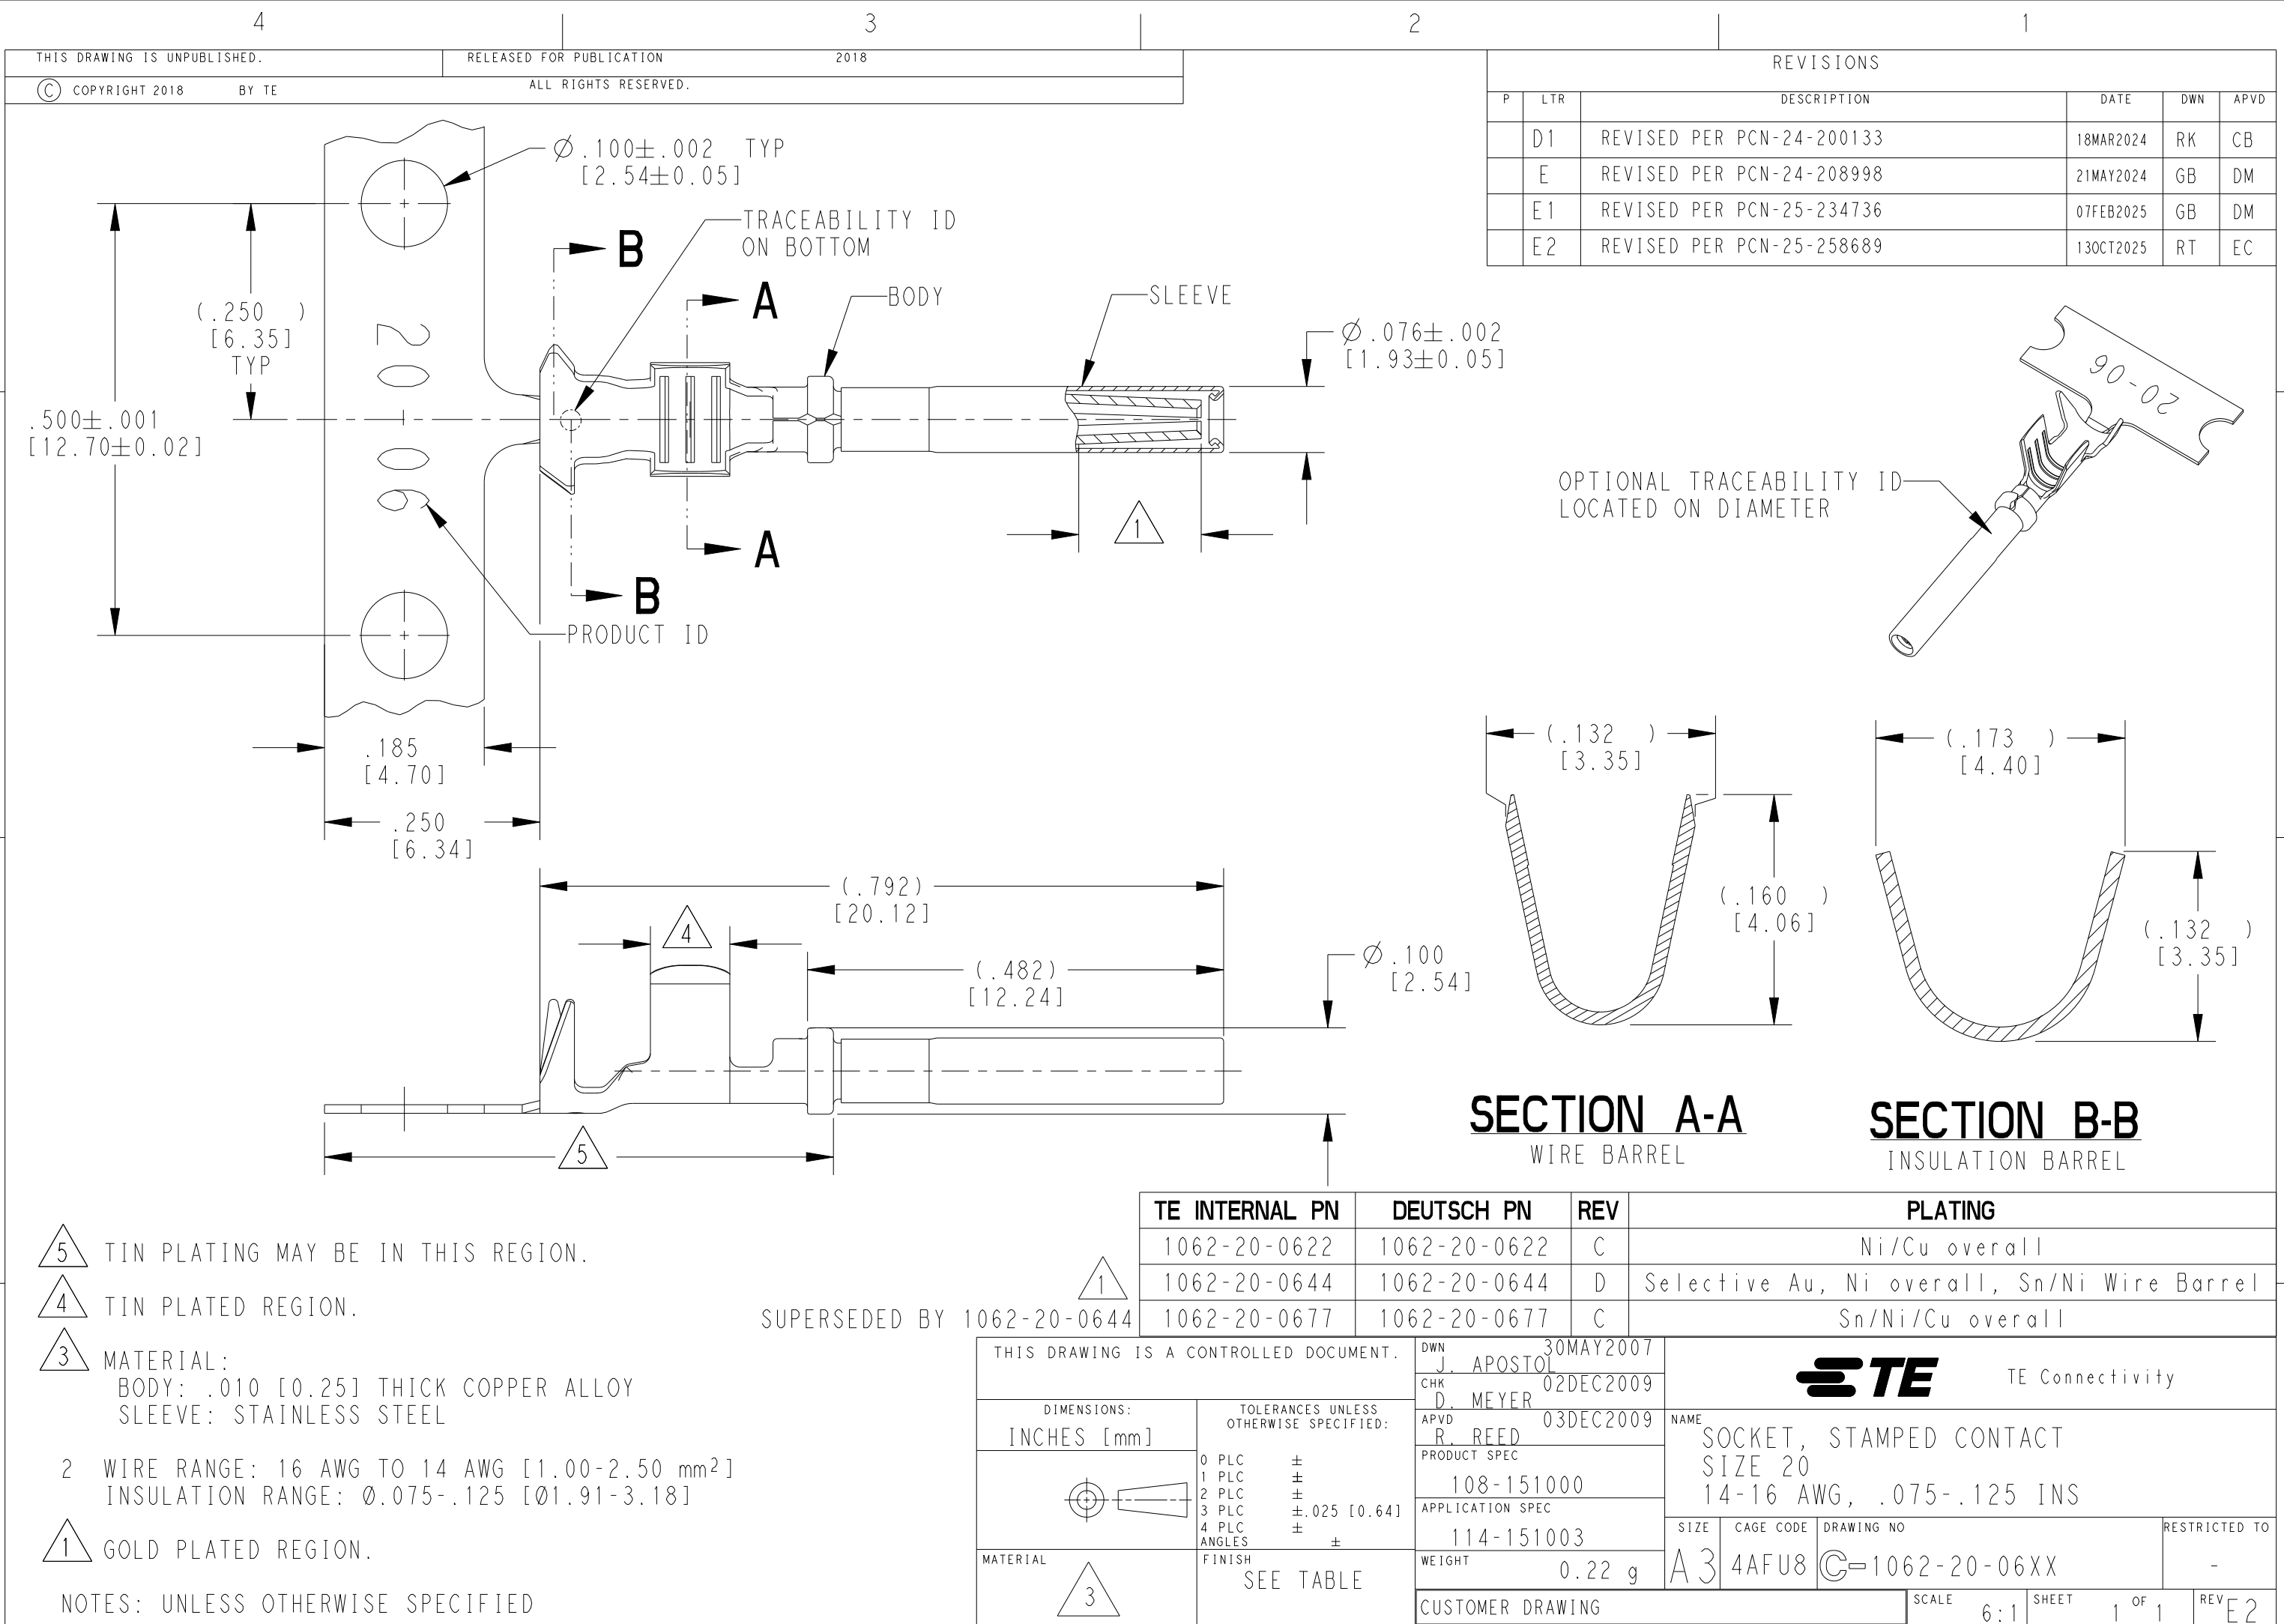

5 TIN PLATING MAY BE IN THIS REGION.

4 TIN PLATED REGION.


3 MATERIAL:
BODY: .010 [0.25] THICK COPPER ALLOY
SLEEVE: STAINLESS STEEL

2 WIRE RANGE: 16 AWG TO 14 AWG [1.00-2.50 mm²]
INSULATION RANGE: Ø.075-.125 [Ø1.91-3.18]

1 GOLD PLATED REGION.

NOTES: UNLESS OTHERWISE SPECIFIED

SUPERSEDED BY 1062-20-0644

		TE INTERNAL PN	DEUTSCH PN	REV	PLATING	
1062-20-0644		1062-20-0622	1062-20-0622	C	Ni/Cu overall	
		1062-20-0644	1062-20-0644	D	Selective Au, Ni overall, Sn/Ni Wire Barrel	
		1062-20-0677	1062-20-0677	C	Sn/Ni/Cu overall	
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN J. APOSTOL 30MAY2007	 TE Connectivity		
DIMENSIONS: INCHES [mm]		CHK D. MEYER 02DEC2009				
		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.025 [0.64] 4 PLC ± ANGLES ±		APVD R. REED 03DEC2009	NAME SOCKET, STAMPED CONTACT SIZE 20 14-16 AWG, .075-.125 INS	
				PRODUCT SPEC 108-151000		
				APPLICATION SPEC 114-151003		
MATERIAL 		FINISH SEE TABLE		WEIGHT 0.22 g	SIZE A3	CAGE CODE 4AFU8
				CUSTOMER DRAWING	DRAWING NO C=1062-20-06XX	RESTRICTED TO -
				SCALE 6:1	SHEET 1 OF 1	REV E2