

Appnote PAA-MAX9788-01



**Piëzo-ceramic audio amplifiers
PAA-MAX9788-01**

SONITRON

November 2008

SONITRON N.V.
R&D DEPARTMENT

Sonitron PAA-MAX9788-01 Amplifier



14Vp-P, Class G Ceramic Speaker Driver

General Description

The MAX9788 features a mono Class G power amplifier with an integrated inverting charge-pump power supply specifically designed to drive the high capacitance of a ceramic loudspeaker. The charge pump can supply greater than 700mA of peak output current at 5.5VDC, guaranteeing an output of 14Vp-P.

The MAX9788 maximizes battery life by offering high-performance efficiency. Maxim's proprietary Class G output stage provides efficiency levels greater than Class AB devices without the EMI penalties commonly associated with Class D amplifiers.

The MAX9788 is ideally suited to deliver the high output-voltage swing required to drive ceramic/piezoelectric speakers.

The device utilizes fully differential inputs and outputs, comprehensive click-and-pop suppression, shutdown control, and soft-start circuitry. The MAX9788 is fully specified over the -40°C to +85°C extended temperature range and is available in small lead-free 28-pin TQFN (4mm x 4mm) or 20-bump WLP (2mm x 2.5mm) packages.

Features

- ◆ Integrated Charge-Pump Power Supply—No Inductor Required
- ◆ 14Vp-p Voltage Swing into Piezoelectric Speaker
- ◆ 2.7V to 5.5V Single-Supply Operation
- ◆ Clickless/Popless Operation
- ◆ Small Thermally Efficient Packages
4mm x 4mm 28-Pin TQFN
2mm x 2.5mm 20-Bump WLP

MAX9788

Ordering Information


PART	PIN-PACKAGE	TEMP RANGE
MAX9788EWP+TG45	20 WLP	-40°C to +85°C
MAX9788ETI+	28 TQFN-EP*	-40°C to +85°C

+Denotes a lead-free package.


T = Tape and reel.

G45 indicates protective die coating.

*EP = Exposed pad.

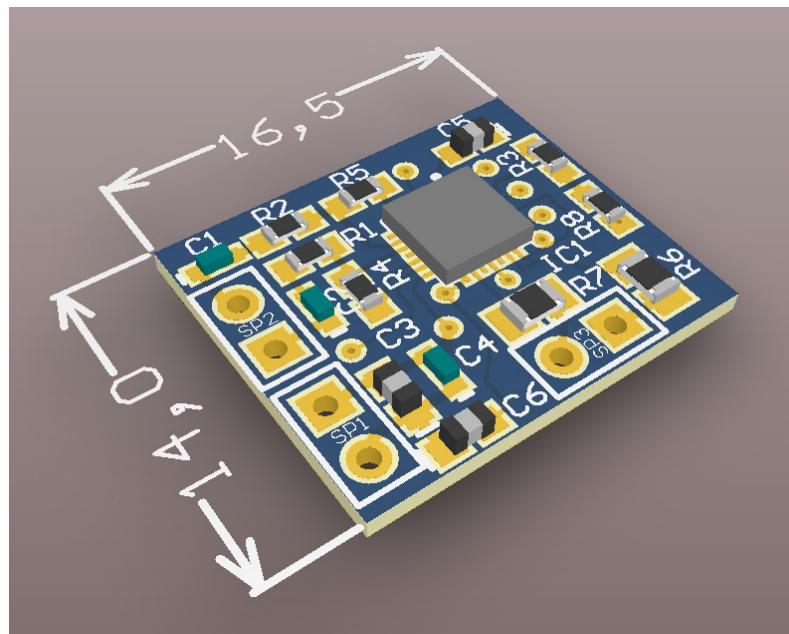


The MAX9788's Class G technology can deliver up to 20V_{P-P}, ideal for driving ultra-thin piezoelectric and ceramic speakers, for portable applications such as cell phones, smartphones, and portable media players.

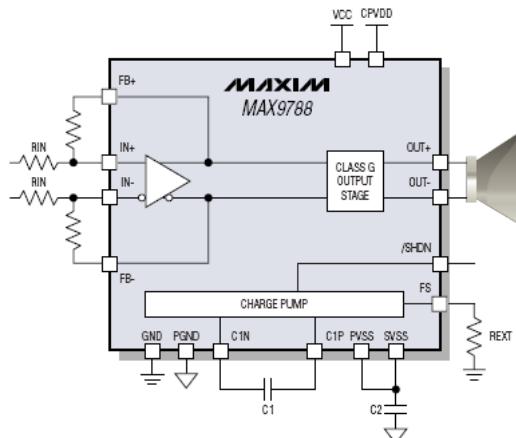

Specifications:


- **Class G amplifier** to drive a bridge-tied –load (BTL) Piëzo-ceramic speaker
- Input Voltage: 2.7V to 5.5V
- Input Audio Signal: 0V To 1.5Vpp
- Output Audio Signal: Max 20Vpp
- Capacitive load up to 1μF
- Dimensions: 14mm on 16.5mm

14*16.5

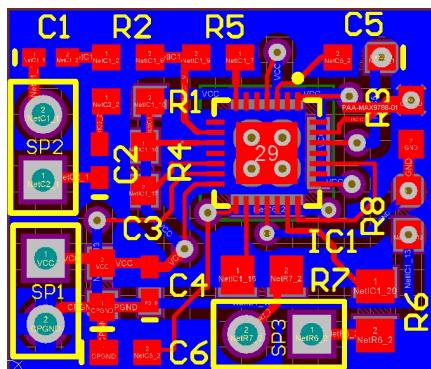

	Designator	Description	Package	Quantity
1	R1, R2	Chip Resistor 10k/1%	R0603	2
2	R3	Chip Resistor 0R/1%	R0603	1
3	R4,R5	Chip Resistor 200k/1%	R0603	2
4	R6,R7	Chip Resistor 10R/1%	R0805	2
5	R8	Chip Resistor 100K/1%	R0603	1
6	C1,C2	Ceramic Capacitor 68nF/16V/10%/X7R	C0402	2
7	C3,C6	Ceramic Capacitor 10uF/6,3V/20%/X5R	C0603	2
8	C4	Ceramic Capacitor 0,1uF/16V/10%/X5R	C0402	1
9	C5	Ceramic Capacitor 4,7uF/6,3V/10%/X5R	C0603	1
10	U1	MAX9788 Piezo Ceramic Speaker Amplifier	Thin QFN28	1

Electronic Schematic of PAA-MAX9788-01

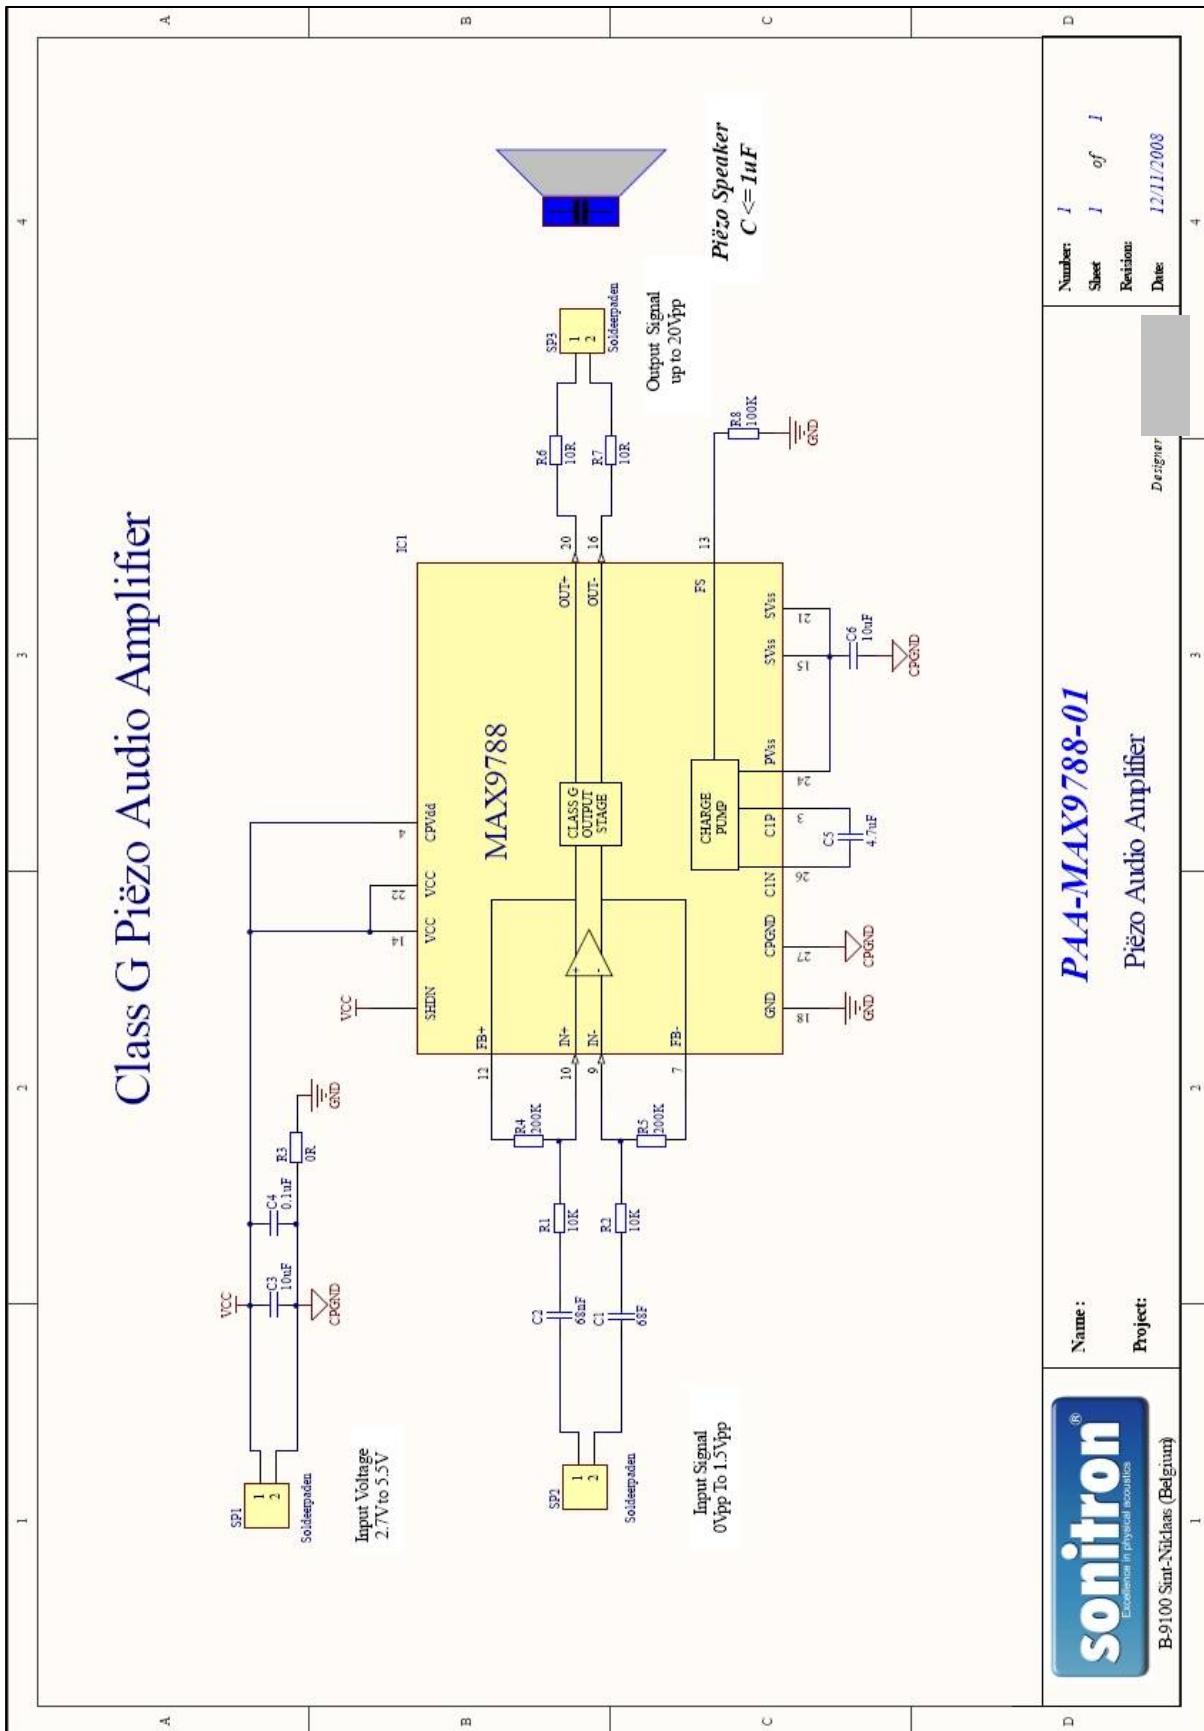

MAX9788

14VP-P, Class G Ceramic Speaker Driver

ABSOLUTE MAXIMUM RATINGS

(Voltages with respect to GND.)

V _{CC} , CPV _{DD}	-0.3V to +6V
PV _{SS} , SV _{SS}	-6V to +0.3V
CPGND	-0.3V to +0.3V
OUT+, OUT-	(SV _{SS} - 0.3V) to (V _{CC} + 0.3V)
IN+, IN-, FB+, FB-	-0.3V to (V _{CC} + 0.3V)
C1N	(PV _{SS} - 0.3V) to (CPGND + 0.3V)
C1P	(CPGND - 0.3V) to (CPV _{DD} + 0.3V)
FS, SHDN	-0.3V to (V _{CC} + 0.3V)
Continuous Current Into/Out of OUT+, OUT-, V _{CC} , GND, SV _{SS}	800mA

CPV _{DD} , CPGND, C1P, C1N, PV _{SS}	800mA
Any Other Pin	20mA
Continuous Power Dissipation (T _A = +70°C)	
20-Bump WLP (derate 10.3mW/°C above +70°C) (Note 1)	827mW
28-Pin TQFN (derate 20.8mW/°C above +70°C)	1667mW
Operating Temperature Range	-40°C to +85°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (soldering, 10s)	+300°C
Bump Temperature (soldering) Reflow	+235°C

Note 1: Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, see www.maxim-ic.com/thermal-tutorial.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V_{CC} = V_{CPVDD} = V_{SHDN} = 3.6V, V_{GND} = V_{CPGND} = 0V, R_{IN+} = R_{IN-} = 10kΩ, R_{FB+} = R_{FB-} = 10kΩ, R_{FS} = 100kΩ, C₁ = 4.7μF, C₂ = 10μF; load connected between OUT+ and OUT-, Z_{LOAD} = 10Ω + 1μF, unless otherwise stated; T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.) (Notes 2, 3)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
GENERAL						
Supply Voltage Range	V _{CC}	Inferred from PSRR test	2.7	5.5		V
Quiescent Current	I _{CC}		8	12		mA
Shutdown Current	I _{SHDN}	SHDN = GND	0.3	5		μA
Turn-On Time	t _{ON}	Time from shutdown or power-on to full operation	50			ms
Input DC Bias Voltage	V _{BIAS}	IN_ inputs (Note 4)	1.1	1.24	1.4	V
Charge-Pump Oscillator Frequency	f _{OSC}	I _{LOAD} = 0mA (slow mode)	55	83	110	kHz
		I _{LOAD} > 100mA (normal mode)	230	330	470	
SHDN Input Threshold (Note 5)		V _{IH}	1.4			V
		V _{IL}			0.4	
SHDN Input Leakage Current				±1		μA
SPEAKER AMPLIFIER						
Output Offset Voltage	V _{OS}	TA = +25°C	±3	±15		mV
		T _{MIN} ≤ T _A ≤ T _{MAX}		±20		
Click-and-Pop Level	V _{CP}	Peak voltage into/out of shutdown A-weighted, 32 samples per second (Notes 6, 7)		-67		dBV
Voltage Gain	A _V	(Notes 4, 8)	11.5	12	12.5	dB
Output Voltage	V _{OUT}	f = 1kHz, 1% THD+N	V _{CC} = 5V	7.1		VRMS
			V _{CC} = 4.2V	5.9		
			V _{CC} = 3.6V	5.1		
			V _{CC} = 3.0V	4.2		

14Vp-P, Class G Ceramic Speaker Driver

ELECTRICAL CHARACTERISTICS (continued)

($V_{CC} = V_{CPVDD} = V_{SHDN} = 3.6V$, $V_{GND} = V_{CPGND} = 0V$, $R_{IN+} = R_{IN-} = 10k\Omega$, $R_{FB+} = R_{FB-} = 10k\Omega$, $R_{FS} = 100k\Omega$, $C_1 = 4.7\mu F$, $C_2 = 10\mu F$; load connected between OUT+ and OUT-, $Z_{LOAD} = 10\Omega + 1\mu F$, unless otherwise stated; $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted. Typical values are at $T_A = +25^\circ C$.) (Notes 2, 3)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	V _{OUT}	$f = 10kHz$, 1% THD+N, $Z_L = 1\mu F + 10\Omega$, no load	$V_{CC} = 5V$	6.5		VRMS
			$V_{CC} = 4.2V$	5.4		
			$V_{CC} = 3.6V$	4.7		
			$V_{CC} = 3.0V$	3.3		
Continuous Output Power	P _{OUT}	1% THD+N, $f = 1kHz$, $R_L = 8\Omega$	$V_{CC} = 5V$	2.4		W
			$V_{CC} = 4.2V$	1.67		
			$V_{CC} = 3.6V$	1.25		
			$V_{CC} = 3.0V$	0.8		
Power-Supply Rejection Ratio (Note 4)	PSRR	$V_{CC} = 2.7V$ to $5.5V$	63	77		dB
		$f = 217Hz$, 200mVp-p ripple		77		
		$f = 1kHz$, 200mVp-p ripple		77		
		$f = 20kHz$, 200mVp-p ripple		58		
Total Harmonic Distortion Plus Noise	THD+N	$Z_L = 1\mu F + 10\Omega$, $V_{OUT} = 1kHz / 1.9VRMS$	0.002			%
		$Z_L = 1\mu F + 10\Omega$, $V_{OUT} = 1kHz / 4.0VRMS$	0.08			
Signal-to-Noise Ratio	SNR	$V_{OUT} = 5.1VRMS$, A-weighted		108		dB
Common-Mode Rejection Ratio	CMRR	$f_{IN} = 1kHz$ (Note 9)		68		dB
Dynamic Range	DR	A-weighted (Note 10)	$V_{CC} = 5V$	106		dB
			$V_{CC} = 3.6V$	105		

Note 2: All devices are 100% production tested at room temperature. All temperature limits are guaranteed by design.

Note 3: Testing performed with resistive and capacitive loads to simulate an actual ceramic/piezoelectric speaker load, $Z_L = 1\mu F + 10\Omega$.

Note 4: Input DC bias voltage determines the maximum voltage swing of the input signal. Inputting a signal with a peak voltage of greater than the input DC bias voltage results in clipping.

Note 5: 1.8V logic compatible.

Note 6: Amplifier/inputs AC-coupled to GND.

Note 7: Testing performed at room temperature with 10Ω resistive load in series with $1\mu F$ capacitive load connected across the BTL output for speaker amplifier. Mode transitions are controlled by \overline{SHDN} . V_{CP} is the peak output transient expressed in dBV.

Note 8: Voltage gain is defined as: $[V_{OUT+} - V_{OUT-}] / [V_{IN+} - V_{IN-}]$.

Note 9: P_{VS} is forced to $-3.6V$ to simulate boosted rail.

Note 10: Dynamic range is calculated by measuring the RMS voltage difference between a $-60dBFS$ output signal and the noise floor, then adding 60dB. Full scale is defined as the output signal needed to achieve 1% THD+N.

R_{IN-} and R_{FB-} have 0.5% tolerance. The Class G output stage has 12dB of gain. Any gain or attenuation at the input stage will add to or subtract from the gain of the Class G output.

MAX9788


MAX9788

14VP-P, Class G Ceramic Speaker Driver


Typical Operating Characteristics

($V_{CC} = V_{CPVDD} = V_{SHDN} = 3.6V$, $V_{GND} = V_{CPGND} = 0V$, $R_{IN+} = R_{IN-} = 10k\Omega$, $R_{FB+} = R_{FB-} = 10k\Omega$, $R_{FS} = 100k\Omega$, $C_1 = 4.7\mu F$, $C_2 = 10\mu F$, $Z_L = 1\mu F + 10\Omega$; load terminated between OUT+ and OUT-, unless otherwise stated; $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted. Typical values are at $T_A = +25^\circ C$.) (Notes 1, 2)


TOTAL HARMONIC DISTORTION PLUS NOISE vs. FREQUENCY

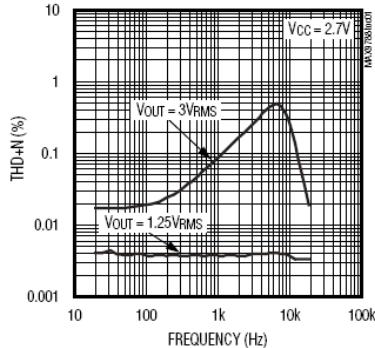


TOTAL HARMONIC DISTORTION PLUS NOISE vs. FREQUENCY

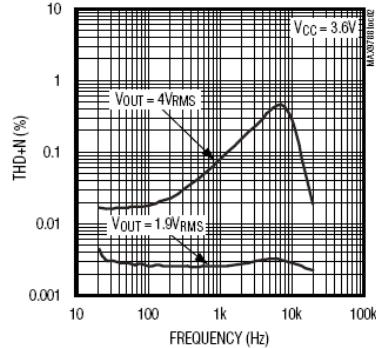


TOTAL HARMONIC DISTORTION PLUS NOISE vs. FREQUENCY

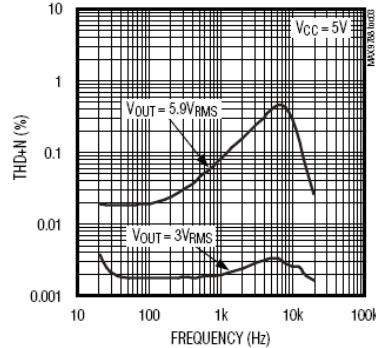


TOTAL HARMONIC DISTORTION PLUS NOISE vs. OUTPUT VOLTAGE

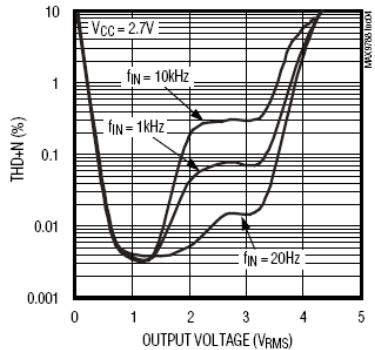


TOTAL HARMONIC DISTORTION PLUS NOISE vs. OUTPUT VOLTAGE

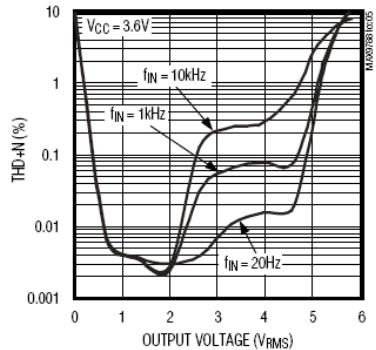


TOTAL HARMONIC DISTORTION PLUS NOISE vs. OUTPUT VOLTAGE

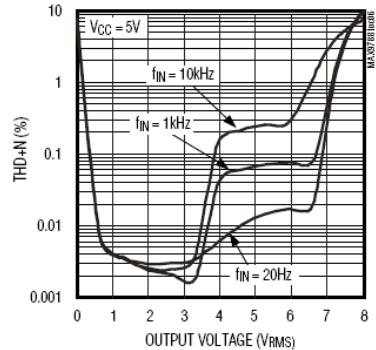


POWER-SUPPLY REJECTION RATIO vs. FREQUENCY

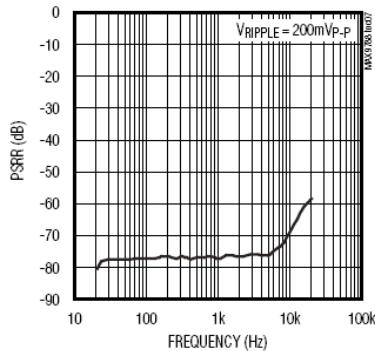

POWER CONSUMPTION vs. OUTPUT VOLTAGE

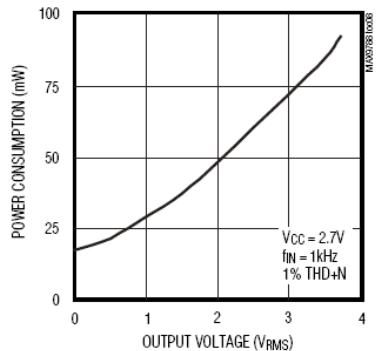








POWER CONSUMPTION vs. OUTPUT VOLTAGE

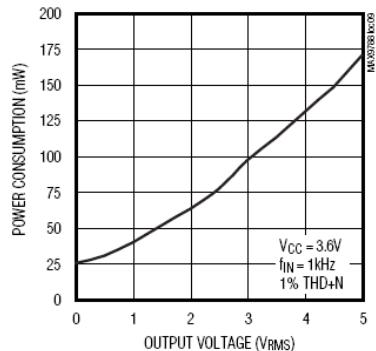

14VP-P, Class G Ceramic Speaker Driver

Typical Operating Characteristics (continued)

($V_{CC} = V_{CPVDD} = V_{SHDN} = 3.6V$, $V_{GND} = V_{CPGND} = 0V$, $R_{IN+} = R_{IN-} = 10k\Omega$, $R_{FB+} = R_{FB-} = 10k\Omega$, $R_{FS} = 100k\Omega$, $C_1 = 4.7\mu F$, $C_2 = 10\mu F$, $Z_L = 1\mu F + 10\Omega$; load terminated between OUT+ and OUT-, unless otherwise stated; $TA = T_{MIN}$ to T_{MAX} , unless otherwise noted. Typical values are at $TA = +25^\circ C$.) (Notes 1, 2)

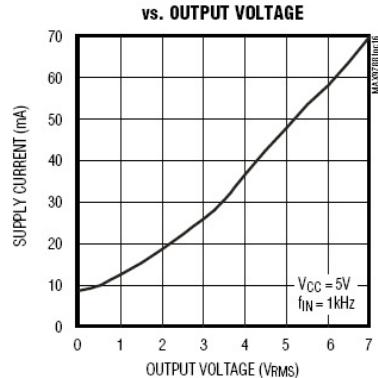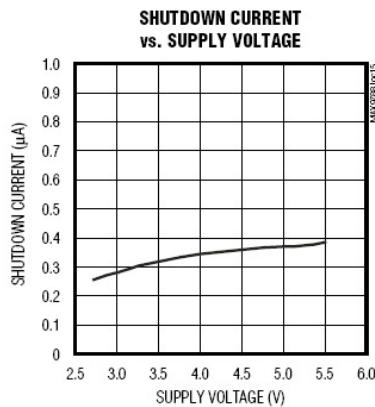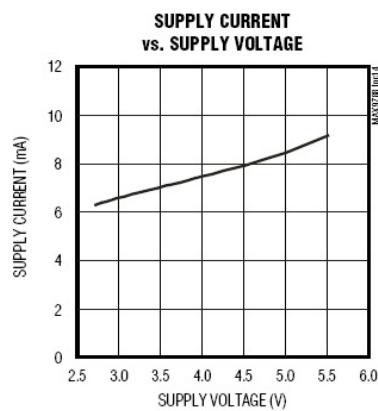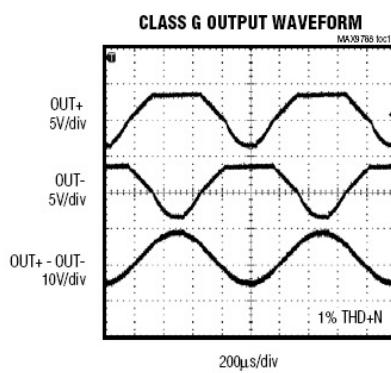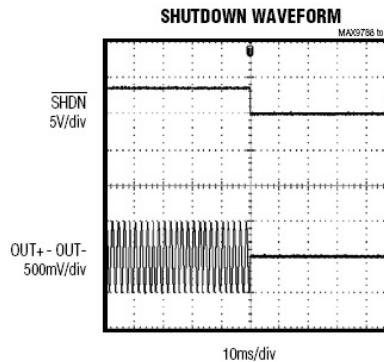
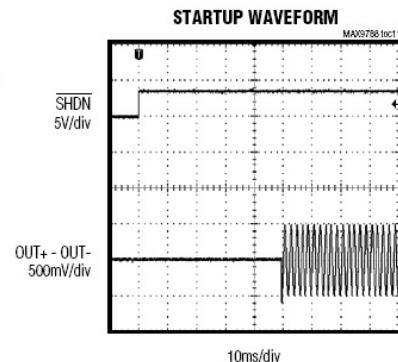
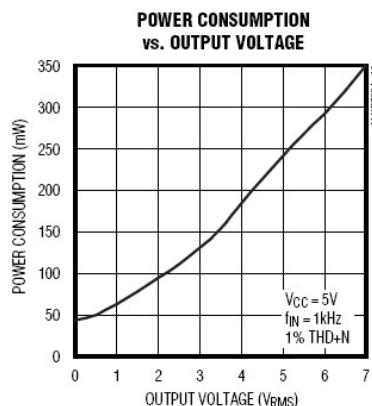


MAX9788

14VP-P, Class G Ceramic Speaker Driver

Typical Operating Characteristics (continued)

($V_{CC} = V_{CPVDD} = V_{SHDN} = 3.6V$, $V_{GND} = V_{CPGND} = 0V$, $R_{IN+} = R_{IN-} = 10k\Omega$, $R_{FB+} = R_{FB-} = 10k\Omega$, $R_{FS} = 100k\Omega$, $C_1 = 4.7\mu F$, $C_2 = 10\mu F$, $Z_L = 1\mu F + 10\Omega$; load terminated between OUT+ and OUT-, unless otherwise stated; $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted. Typical values are at $T_A = +25^\circ C$.) (Notes 1, 2)

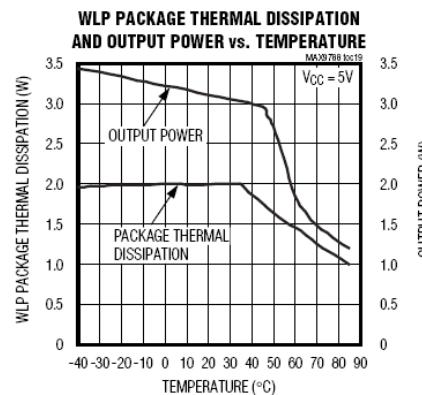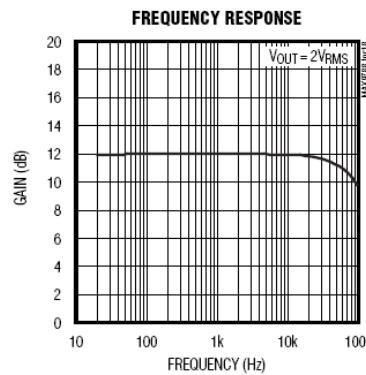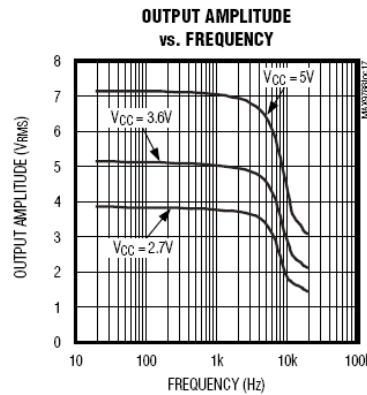

Pin Description

PIN		NAME	FUNCTION
TQFN	WLP		
1	B2	SHDN	Shutdown
2, 5, 6, 8, 11, 17, 19, 23, 25, 28	—	N.C.	No Connection. No internal connection.
3	A2	C1P	Charge-Pump Flying Capacitor, Positive Terminal. Connect a $4.7\mu F$ capacitor between C1P and C1N.
4	A3	CPVDD	Charge-Pump Positive Supply
7	A4	FB-	Negative Amplifier Feedback
9	A5	IN-	Negative Amplifier Input
10	B5	IN+	Positive Amplifier Input
12	B4	FB+	Positive Amplifier Feedback
13	C5	FS	Charge-Pump Frequency Set. Connect a $100k\Omega$ resistor from FS to GND to set the charge-pump switching frequency.
14, 22	D1, D5	VCC	Supply Voltage. Bypass with a $10\mu F$ capacitor to GND.
15, 21	C2, C4	SVSS	Amplifier Negative Power Supply. Connect to PVSS.
16	D4	OUT-	Negative Amplifier Output
18	D3	GND	Ground
20	D2	OUT+	Positive Amplifier Output
24	C1	PVSS	Charge-Pump Output. Connect a $10\mu F$ capacitor between PVSS and CPGND.
26	B1	C1N	Charge-Pump Flying Capacitor, Negative Terminal. Connect a $4.7\mu F$ capacitor between C1N and C1P.
27	A1	CPGND	Charge-Pump Ground. Connect to GND.
EP	—	EP	Exposed Pad. Connect the TQFN EP to GND.

14Vp-P, Class G Ceramic Speaker Driver

Detailed Description

The MAX9788 Class G power amplifier with inverting charge pump is the latest in linear amplifier technology. The Class G output stage offers improved performance over a Class AB amplifier while increasing efficiency to extend battery life. The integrated inverting charge pump generates a negative supply capable of delivering greater than 700mA.

The Class G output stage and the inverting charge pump allow the MAX9788 to deliver a 14Vp-P voltage swing, up to two times greater than a traditional single-supply linear amplifier.

Class G Operation

The MAX9788 Class G amplifier is a linear amplifier that operates within a low (V_{CC} to GND) and high (V_{CC} to SV_{SS}) supply range. Figure 1 illustrates the transition from the low to high supply range. For small signals, the device operates within the lower (V_{CC} to GND) supply range. In this range, the operation of the device is identical to a traditional single-supply Class AB amplifier where:

$$I_{LOAD} = I_{N1}$$

As the output signal increases so a wider supply is needed, the device begins its transition to the higher supply range (V_{CC} to SV_{SS}) for the large signals. To ensure a seamless transition between the low and high supply ranges, both of the lower transistors are on so that:

$$I_{LOAD} = I_{N1} + I_{N2}$$

As the output signal continues to increase, the transition to the high supply is complete. The device then operates in the higher supply range, where the operation of the device is identical to a traditional dual-supply Class AB amplifier where:

$$I_{LOAD} = I_{N2}$$

During operation, the output common-mode voltage of the MAX9788 adjusts dynamically as the device transitions between supply ranges.

Utilizing a Class G output stage with an inverting charge pump allows the MAX9788 to realize a 20Vp-P output swing with a 5V supply.

MAX9788

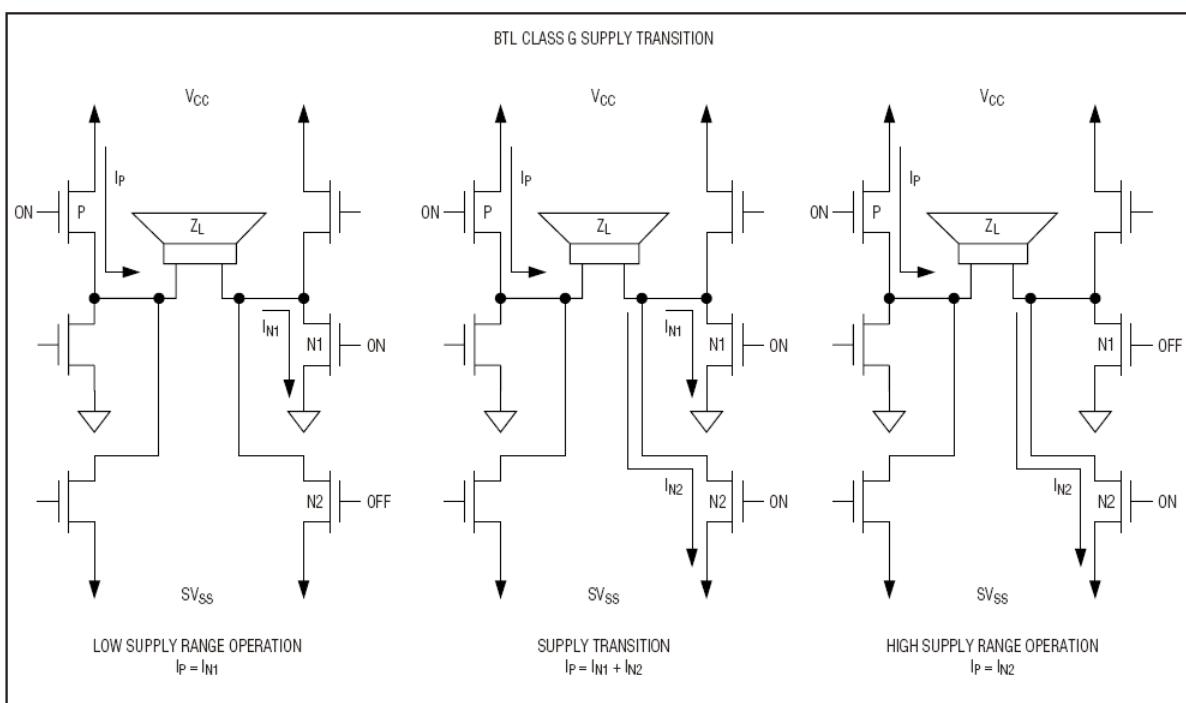


Figure 1. Class G Supply Transition

MAX9788

14VP-P, Class G Ceramic Speaker Driver

Inverting Charge Pump

The MAX9788 features an integrated charge pump with an inverted supply rail that can supply greater than 700mA over the positive 2.7V to 5.5V supply range. In the case of the MAX9788, the charge pump generates the negative supply rail (PVSS) needed to create the higher supply range, which allows the output of the device to operate over a greater dynamic range as the battery supply collapses over time.

Shutdown Mode

The MAX9788 has a shutdown mode that reduces power consumption and extends battery life. Driving SHDN low places the MAX9788 in a low-power (0.3µA) shutdown mode. Connect SHDN to VCC for normal operation.

Click-and-Pop Suppression

The MAX9788 Class G amplifier features Maxim's comprehensive, industry-leading click-and-pop suppression. During startup, the click-and-pop suppression circuitry eliminates any audible transient sources internal to the device.

Applications Information

Differential Input Amplifier

The MAX9788 features a differential input configuration, making the device compatible with many CODECs, and offering improved noise immunity over a single-ended input amplifier. In devices such as PCs, noisy digital signals can be picked up by the amplifier's input traces. The signals appear at the amplifier's inputs as common-mode noise. A differential input amplifier amplifies the difference of the two inputs and signals common to both inputs are canceled out. When configured for differential inputs, the voltage gain of the MAX9788 is set by:

$$AV = 20 \log \left[4 \times \left(\frac{R_{FB-}}{R_{IN-}} \right) \right] (\text{dB})$$

where AV is the desired voltage gain in dB. R_{IN+} should be equal to R_{IN-} , and R_{FB+} should be equal to R_{FB-} . The Class G output stage has a fixed gain of 4V/V (12dB). Any gain or attenuation set by the external input stage resistors will add to or subtract from this fixed gain. See Figure 2.

In differential input configurations, the common-mode rejection ratio (CMRR) is primarily limited by the external resistor and capacitor matching. Ideally, to achieve the highest possible CMRR, the following external components should be selected where:

$$\frac{R_{FB+}}{R_{IN+}} = \frac{R_{FB-}}{R_{IN-}}$$

and

$$C_{IN+} = C_{IN-}$$

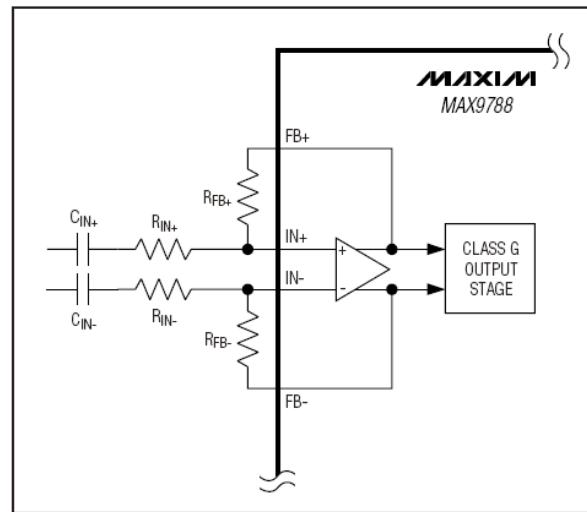


Figure 2. Gain Setting

14VP-P, Class G Ceramic Speaker Driver

Driving a Ceramic Speaker

Applications that require thin cases, such as today's mobile phones, demand that external components have a small form factor. Dynamic loudspeakers that use a cone and voice coil typically cannot conform to the height requirements. The option for these applications is to use a ceramic/piezoelectric loudspeaker.

Ceramic speakers are much more capacitive than a conventional loudspeaker. Typical capacitance values for such a speaker can be greater than 1 μ F. High peak-to-peak voltage drive is required to achieve acceptable sound pressure levels. The high output voltage requirement coupled with the capacitive nature of the speaker demand that the amplifier supply much more current at high frequencies than at lower frequencies. Above 10kHz, the typical speaker impedance can be less than 16 Ω .

The MAX9788 is ideal for driving a capacitive ceramic speaker. The high charge-pump current limit allows for a flat frequency response out to 20kHz while maintaining high output voltage swings. See the Frequency Response graph in the *Typical Operating Characteristics*. Figure 3 shows a typical circuit for driving a ceramic speaker.

A 10 Ω series resistance is recommended between the amplifier output and the ceramic speaker load to ensure the output of the amplifier sees some fixed resistance at high frequencies when the speaker is essentially an electrical short.

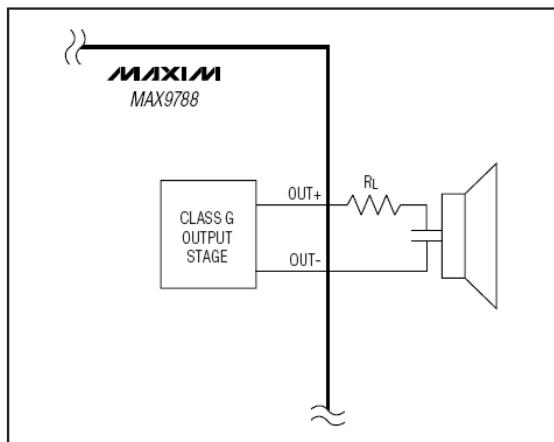


Figure 3. Driving a Ceramic Speaker

Component Selection

Input-Coupling Capacitor

The AC-coupling capacitors (C_{IN}) and input resistors (R_{IN}) form highpass filters that remove any DC bias from an input signal (see the *Functional Diagram/Typical Operating Circuit*). C_{IN} blocks DC voltages from the amplifier input. The -3dB point of the highpass filter, assuming zero source impedance due to the input signal source, is given by:

$$f_{-3dB} = \frac{1}{2\pi \times R_{IN} \times C_{IN}} \text{ (Hz)}$$

Ceramic speakers generally perform best at frequencies greater than 1kHz. Low frequencies can deflect the piezoelectric speaker element so that high frequencies cannot be properly reproduced. This can cause distortion in the speaker's usable frequency band. Select a C_{IN} so the f_{-3dB} closely matches the low frequency response of the ceramic speaker. Use capacitors with low-voltage coefficient dielectrics. Aluminum electrolytic, tantalum, or film dielectric capacitors are good choices for AC-coupling capacitors. Capacitors with high-voltage coefficients, such as ceramics (non-C0G dielectrics), can result in increased distortion at low frequencies.

Charge-Pump Capacitor Selection

Use capacitors with an ESR less than 50m Ω for optimum performance. Low-ESR ceramic capacitors minimize the output resistance of the charge pump. For best performance over the extended temperature range, select capacitors with an X7R dielectric.

Flying Capacitor (C1)

The value of the flying capacitor (C1) affects the load regulation and output resistance of the charge pump. A C1 value that is too small degrades the device's ability to provide sufficient current drive. Increasing the value of C1 improves load regulation and reduces the charge-pump output resistance to an extent. Above 1 μ F, the on-resistance of the switches and the ESR of C1 and C2 dominate. A 4.7 μ F capacitor is recommended.

MAX9788

MAX9788

14VP-P, Class G Ceramic Speaker Driver

Hold Capacitor (C2)

The output capacitor value and ESR directly affect the ripple at PVSS. Increasing C2 reduces output ripple. Likewise, decreasing the ESR of C2 reduces both ripple and output resistance. A 10 μ F capacitor is recommended.

Charge-Pump Frequency Set Resistor (RFS)

The charge pump operates in two modes. When the charge pump is loaded below 100mA, it operates in a slow mode where the oscillation frequency is reduced to 1/4 of its normal operating frequency. Once loaded, the charge-pump oscillation frequency returns to normal operation. In applications where the design may be sensitive to the operating charge-pump oscillation frequency, the value of the external resistor RFS can be changed to adjust the charge-pump oscillation frequency shown in Figure 4. A 100k Ω resistor is recommended.

Ceramic Speaker Impedance Characteristics

A 1 μ F capacitor is a good model for the ceramic speaker as it best approximates the impedance of a ceramic speaker over the audio band. When selecting a capacitor to simulate a ceramic speaker, the voltage rating or the capacitor must be equal to or higher than the expected output voltage swing. See Figure 5.

Series Load Resistor

The capacitive nature of the ceramic speaker results in very low impedances at high frequencies. To prevent the ceramic speaker from shorting the MAX9788 output at high frequencies, a series load resistor must be used. The output load resistor and the ceramic speaker create a lowpass filter. To set the rolloff frequency of the output filter, the approximate capacitance of the speaker must be known. This information can be obtained from bench testing or from the ceramic speaker manufacturer. A series load resistor greater than 10 Ω is recommended. Set the lowpass filter cutoff frequency with the following equation:

$$f_{LP} = \frac{1}{2\pi \times R_L \times C_{SPEAKER}} \text{ (Hz)}$$

WLP Applications Information

For the latest application details on WLP construction, dimensions, tape carrier information, PCB techniques, bump-pad layout, and recommended reflow temperature profile, as well as the latest information on reliability testing results, go to the Maxim website at www.maximic.com/ucsp for the application note, UCSP—A Wafer-Level Chip-Scale Package.

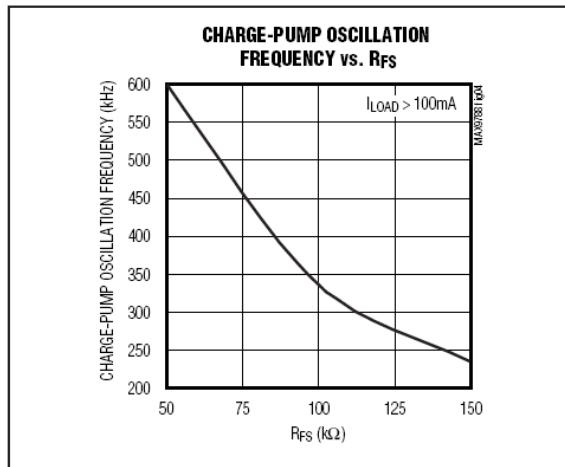


Figure 4. Charge-Pump Oscillation Frequency vs. RFS


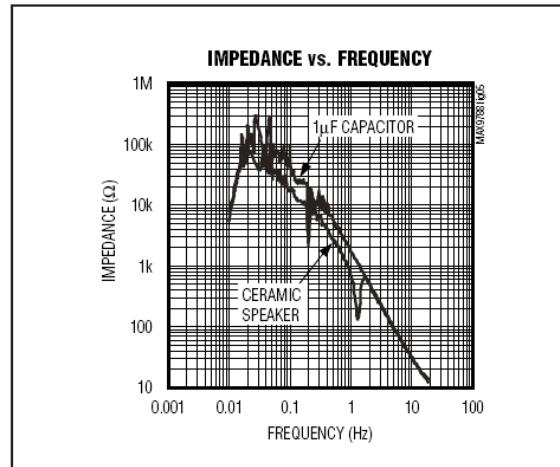


Figure 5. Ceramic Speaker and Capacitor Impedance

14Vp-P, Class G Ceramic Speaker Driver


Typical Application Circuit/Functional Diagram

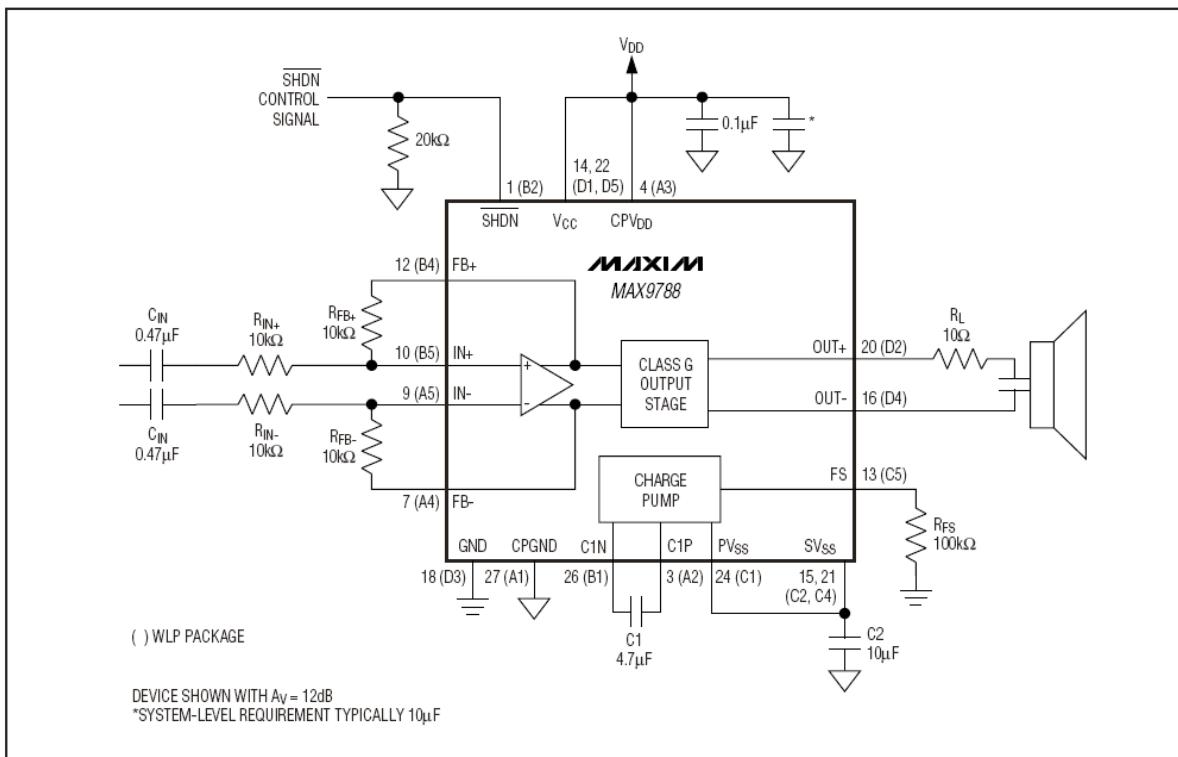

MAX9788

14VP-P, Class G Ceramic Speaker Driver

Pin Configurations

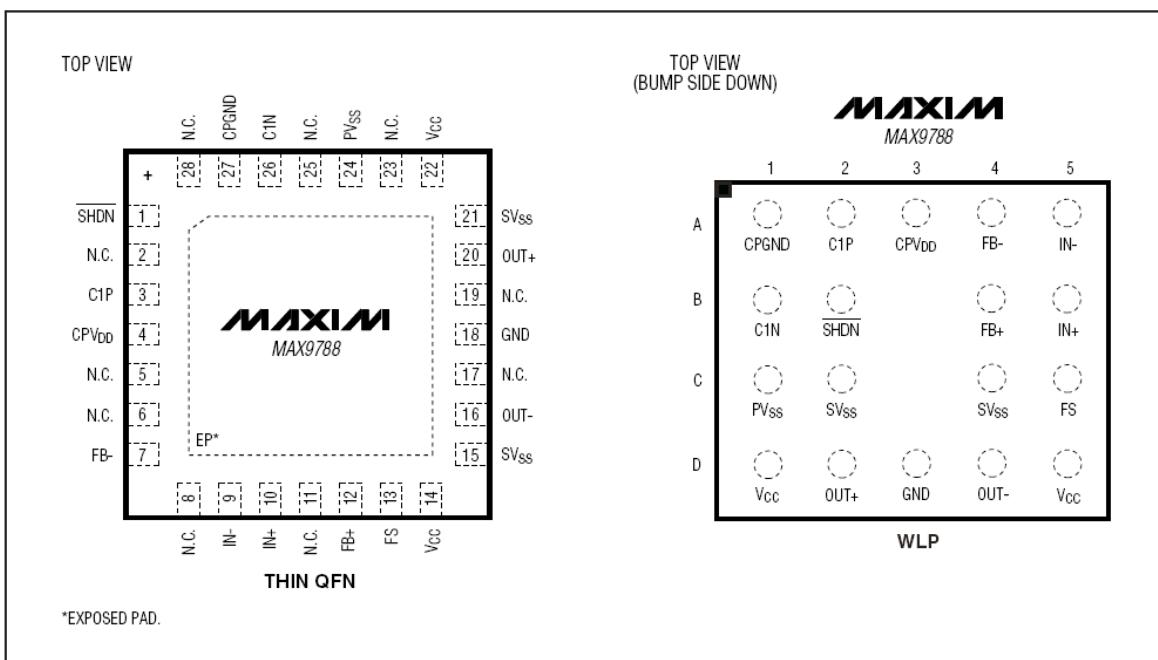

Package Information

For the latest package outline information and land patterns, go to www.maxim-ic.com/packages.

PACKAGE TYPE	PACKAGE CODE	DOCUMENT NO.
20 WLP	W202A2+1	21-0059
28 TQFN	T2844-1	21-0139

Chip Information

PROCESS: BiCMOS

NOTES:

Piëzo Audio Amplifiers & Piëzo Speakers

Type	Manufacturer	Max Vout	Vin	ZL
LM4960	National Semiconductor	24Vpp	3V to 7V	800 nF + 20Ω
LM4961				
LM4962				
LM48555	National Semiconductor	15,7Vpp	3,2V	1μF + 10Ω (tested)
LT3469	Linear Technology	33Vpp	5V or 12V	5nF< C<300nF
MAX 9788	Maxim class G Ceramic Speaker Driver	14Vpp	2,7V to 5,5V	to 1μF + 10Ω
MAX 9738				
MAX668 OPA551	DC-DC converter (MAX668) with Bridge Tied Load (OPA551)	60Vpp	3V	

National Semiconductor

LM4960 Boomer® Audio Power Amplifier Series
Piezoelectric Speaker Driver

General Description

The LM4960 Boomer® is a switching regulator to drive a dual audio power amplifier. It delivers 24Vpp mono-BTL to a ceramic speaker driver. The LM4960 is a current-mode device operating on a 3.0V power supply.

The LM4960 is a current-mode boost converter operating at a fixed frequency of 1.0MHz. Boomer audio power amplifiers were developed specifically to provide high efficiency and low component count of external components. The LM4960 does not require output coupling capacitors, which makes it ideal for mobile phones, ideally suited for mobile phone and other low voltage applications. The LM4960 has a thermal power consumption of a minimum of 1.5W.

The LM4960 includes a built-in 1.0MHz controlled microprocessor shutdown mode. Additionally, the LM4960 includes a short circuit protection mechanism along with a short circuit protection mechanism.

The LM4960 is unity-gain stable and can be configured by external gain-setting resistors.

October 2004

Key Specifications

- $V_{DD} = V_{DDA} = 3.0 \text{ to } 7\text{V}$
- $I_{DD} = 1.0\text{mA} \text{ (typ)}$

Features

- Stereo STI amplifier
- Low current shutdown mode
- High Output Power Range: 3W to 19W
- Output Voltage Range: 1V to 19V
- Differential Gain Stage with High Impedance Output
- (Gu) Stage
- Output Current (from V_{DD}): 2mA
- Unloaded Gain: 30dB (Typical)
- Provides V_{DD} Up to 33V
- Wide Output Voltage Range: 2.5V to 16V
- High Switching Frequency: 1.0MHz
- Internal Schmitt-Door
- True Unity-Gain Stabilization
- Current Mode Switcher with Thermal Compensation
- Low Profile (1mm) SOIC-23 Package

Applications

- Piezo Speakers
- Piezo Microactuators
- Varactor Bias

Connection Diagram

Top View
Order No. LM4960D
See NI Package Number

Reprinted by permission of National Semiconductor Corporation.
© 2004 National Semiconductor Corporation. DS00768

LT3469 Piezo Microactuator Driver with Boost Regulator

FEATURES


Amplifier

- Current Limit: 50mA (Typical)
- Input Common-Mode Range: 0V to 19V
- Output Voltage Range: 1V to 19V
- Differential Gain Stage with High Impedance Output
- (Gu) Stage
- Output Current (from V_{DD}): 2mA
- Unloaded Gain: 30dB (Typical)
- Provides V_{DD} Up to 33V
- Wide Output Voltage Range: 2.5V to 16V
- High Switching Frequency: 1.0MHz
- Internal Schmitt-Door
- True Unity-Gain Stabilization
- Current Mode Switcher with Thermal Compensation
- Low Profile (1mm) SOIC-23 Package

APPLICATIONS

- Piezo Speakers
- Piezo Microactuators
- Varactor Bias

TYPICAL APPLICATION



Source: Linear Technology Corporation

14Vp.p, Class G Ceramic Speaker Driver

GENERAL DESCRIPTION

The MAX9788 features a switching regulator with an integrated inverting charge-pump power supply specifically designed to drive the high capacitance of a piezoelectric speaker driver. The MAX9788 can deliver greater than 700mA of peak output current at 5.0VDC.

The MAX9788 maximizes battery life by offering high-performance charge-pump technology. Class G boost stage provides efficient power levels for these Class AB devices without the EMI penalties commonly associated with Class D devices.

The MAX9788 is ideally suited to deliver the high output current required for driving high-power piezoelectric speakers. The device utilizes a fully differential noise and output, allowing for high dynamic range, compression, expansion, and soft-start control, and soft-start control. The MAX9788 is fully specified over the extended temperature range of -40°C to +85°C and is available in small lead-free 28-pin TQFN (4mm x 4mm) or 28-pin MLP (2mm x 2.5mm) packages.

*Denotes a lead-free package.

*Tape and reel

*Green = RoHS-compliant

*EP = Expanded lead

Source: Maxim Integrated Products

14Vp.p, Class G Ceramic Speaker Driver

GENERAL DESCRIPTION

The MAX9788 features a switching regulator with an integrated inverting charge-pump power supply specifically designed to drive the high capacitance of a piezoelectric speaker driver. The MAX9788 can deliver greater than 700mA of peak output current at 5.0VDC.

The MAX9788 maximizes battery life by offering high-performance charge-pump technology. Class G boost stage provides efficient power levels for these Class AB devices without the EMI penalties commonly associated with Class D devices.

The MAX9788 is ideally suited to deliver the high output current required for driving high-power piezoelectric speakers. The device utilizes a fully differential noise and output, allowing for high dynamic range, compression, expansion, and soft-start control, and soft-start control. The MAX9788 is fully specified over the extended temperature range of -40°C to +85°C and is available in small lead-free 28-pin TQFN (4mm x 4mm) or 28-pin MLP (2mm x 2.5mm) packages.

*Denotes a lead-free package.


*Tape and reel

*Green = RoHS-compliant

*EP = Expanded lead

Source: Maxim Integrated Products

Simplified Block Diagram

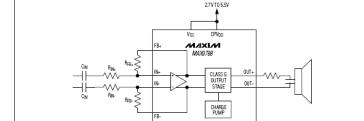

Source: Maxim Integrated Products

Piezo Speakers & Piezo Audio Amplifiers

sonitron®

