
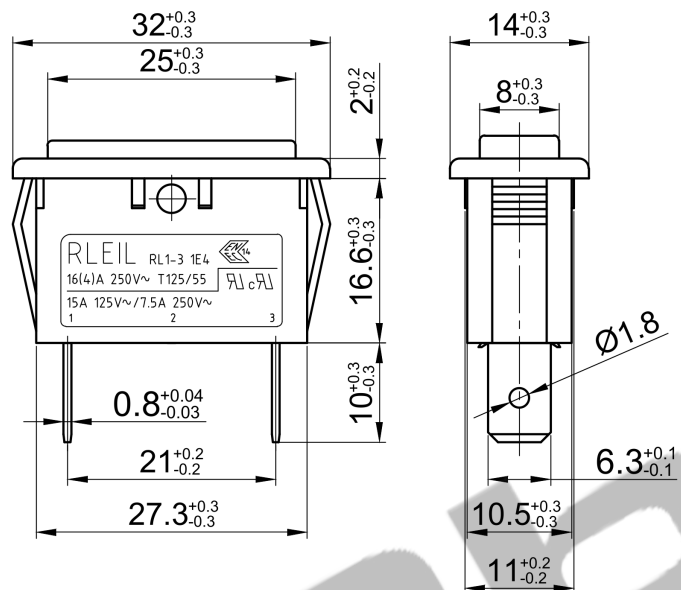



CIRCUIT DIAGRAM



SPECIFICATION


1. RATING:UL C-UL:15A 125VAC/7.5A 250VAC
ENEC :
16(4)A 250VAC T125/55 1E4
2. INDICATOR LED:12VDC
3. CIRCUIT:Indicator LED
4. CONTACT RESISTANCE:30m OHMS Max
5. INSULATION RESISTANCE:DC500V 100M OHMS Min
6. WITHSTAND VOLTAGE:AC 1500V 1 Minute
7. ELECTRICAL LIFE:10000 Cycles at Full Load
8. OPERATION FORCE:
9. OPERATION TEMPERATURE RANGE:-25~+ 125° C

PANEL HOLE SIZE

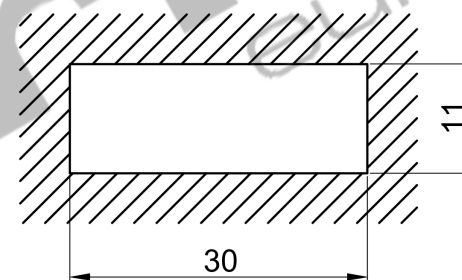

MATERIALS

1. HOUSING:Nylon #66 UL 94V-2
2. ROCKER:PC UL 94HB
3. TERMINAL:Copper Alloy Ag plated
4. CONTACTOR:AgSnO₂In₂O₃ (10)/Cu

	RL-13W-00-I-0-GR/BK-P1-6	
	TITLE	SERIES
	ROCKER SWITCH	RL1-3 (W)
		FUNCTION
VIEWS TYPE	Indicator Led	
	28-04-2026	