
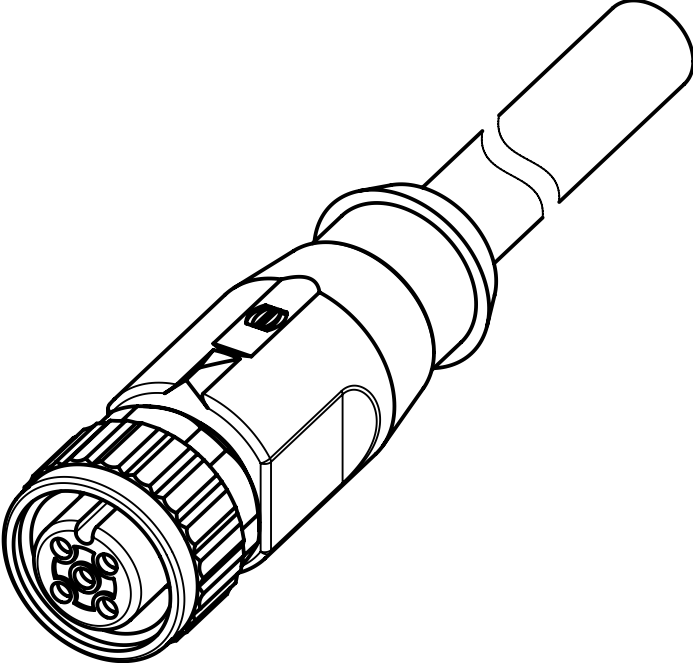



1	2	3	4	5	6	7	8		
A	 M12 A-cod st/- f/- shld. 							A	
Technische Daten:									
Bemessungsspannung: IEC 61076-2-101				60 V					
Strombelastbarkeit: IEC 61076-2-101				4 A / 40°C					
B	Isolationswiderstand: IEC 60512			>=100 MΩ					
Verschmutzungsgrad: IEC 60664-1				3/2					
Schutzart: IEC 60529				IP 67, im verschraubten Zustand					
Umgebungstemperatur: EN 60512-11-10 EN 60512-11-4				-25°C ... +80°C -40°C -40°C ... +85°C					
C	Steckzyklen: IEC 60512-9a			>=100					
Kabeleigenschaften:									
Umgebungstemperatur: fest verlegt bewegt				-25°C ... +80°C -5°C ... +80°C					
Kabel:				TPU, UL 20549 schwarz, 5x0,34mm ² , LiF9YH-C11YH					
D	Werkstoffe:								
Kontakt:				CuZn, Ni b / Au 0,2 gal.					
Kontaktträger:				PA, UL 94 V-0					
Überwurfmutter/-schraube:				GD-Zn, Ni					
Griffkörper:				TPU, UL 94 HB, schwarz					
E	Montagedaten:								
empfohlenes Drehmoment:				0,6 Nm					
F									
   1  2  3  4  5									
 All Dimensions in mm					Tech. Character.			Free size tol.	According to production drawing
 All rights reserved		Created by STOCHECIC Stochechi		Inspected by COSTEA Costea		Standardisation MUNTEANV Muntean	Date 2019-03-05	State Final Release	
Department HCS - RO		Title M12 A-cod st/- f/- shld.						Doc-Key / ECM-Nr. 100802983/UGD/000/A 500000148324	
HARTING Customised Solutions D-32339 Espelkamp		Type DS	Number 21347500568XXX					Rev. A	
							Page 1/1		
1	2	3	4	5	6	7	8		