

A

B

C


D

E

F

General Tolerance		Mark	Date	变更内容描述	担当
Basic size	Tolerance range	*1			
0.0-5.0	±0.05	*2			
5.0-10.0	±0.08	*3			
>10.0	±0.13	*4			

Customer signature	
Company name	
Approved by	
Signature date	

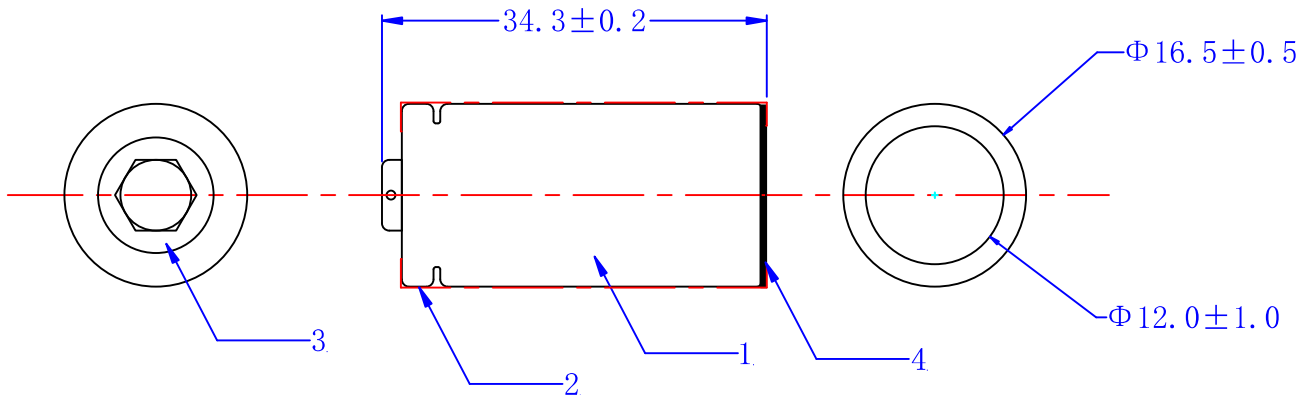

外发文件  
 外发编号: CN-W-20240712-001  
 受控文件

4	Insulation	$\Phi 16.2 * \Phi 13 * 0.5$ , Black, PP	1
3	Insulation	$\Phi 15.5 * 6.25 * 0.3$ mm, Black, PC	1
2	Label	FANSO, CR123A	1
1	Cell	CR123A	1
No.	Machine name	Specification and model	Qty.

Technical requirement:

1. Open-circuit voltage: 3.220-3.300V.
2. Load voltage:  $3.3 \Omega$ , 1s end,  $\geq 2.60V$ .
3. Engrave: 1.5Ah 4.5Wh YYMMDD.
4. Products must comply with our company's "Part of the environmental Hazardous substances control standards", and this battery is RoHS compliant.

RoHS REACH HF Others: \_\_\_\_\_

FANSO Wuhan FANSO Technology co., Ltd Commerical secrets of Voiant company, no spreading without permission!				Machine model	M1282-LF			Part name	Finished product												
Design	Chen Yonghui	Workmanship	Ma Zhihua	Drawing No.	PIE-M1282-01-LF			Item No.	91035535												
Drafting	Chen Yonghui	Quality	Zhou Zhi	Material Science	<table border="1"> <tr> <td>F</td> <td>C</td> <td>Z</td> <td>D</td> <td>S</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>√</td> </tr> </table>			F	C	Z	D	S					√	Edition	A	View direction	
F	C	Z	D	S																	
				√																	
Examine	Ma Zhihua	Approval	Wang Chao	Stage marker				Date	2024.07.10												
Standardization	Date		2024.07.10	Date	Sheet 1 of 1			weight	proportion												
				Company	mm			Size	A4												

A

B

C

D

E

F

1

2

3

4