
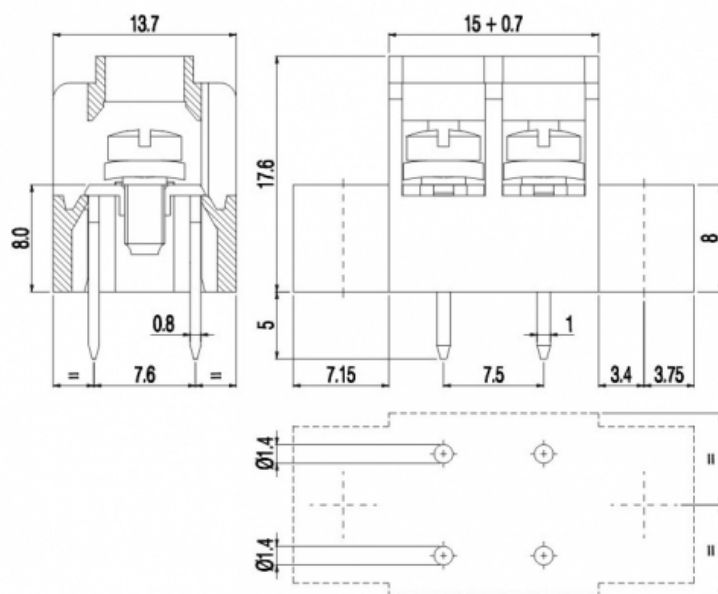


MT17x-7,5-WCK euroclamp

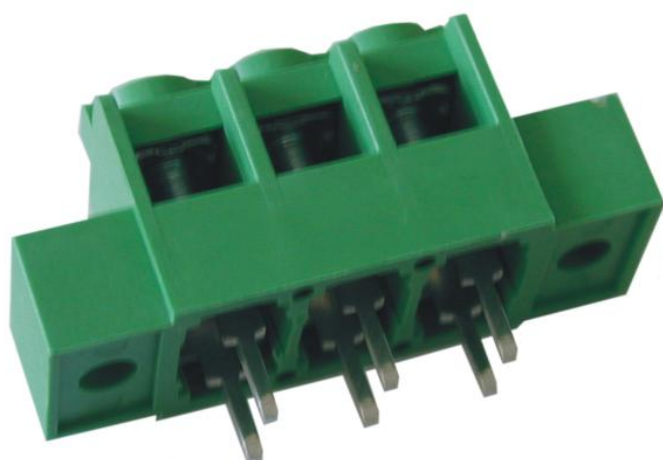

Barrier terminal block - Double pin - with flange - Pitch 7,5mm - 2÷3 poles

GENERAL INFORMATION

pitch:	7,5 mm
housing height:	17,60 mm
housing depth:	13.7 mm
dimensional class:	medium
wire section:	2x2.5 mm ² / 2x14 AWG
clamp opening size:	
wire stripping:	max 8 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	24A
voltage:	450V
test voltage:	2.5 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
max. torque:	0.5 Nm / 4.5 in.lbs

APPROVALS DATA



current:	-	-	UL 1059
voltage:	-	-	20A factory / 15A field
wire section:	-	-	300V
torque:	-	-	14÷30AWG
FILE:	-	-	4.5Lb-in
			E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	Galvanized steel

AVAILABLE COLOURS



clamp/spring:
terminal:

Galvanized iron other colours:
Tin-plated copper alloy

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MT172-7,5-WCK	N/A	N/A	N/A
3	MT173-7,5-WCK	N/A	N/A	N/A
..	MT17..-7,5-WCK	N/A	N/A	N/A