


**Data sheet | Item number: 272-302**  
Power supply connector; push-button on both sides; without snap-in mounting feet; without ground contact; 2-pole




[www.wago.com/272-302](http://www.wago.com/272-302)

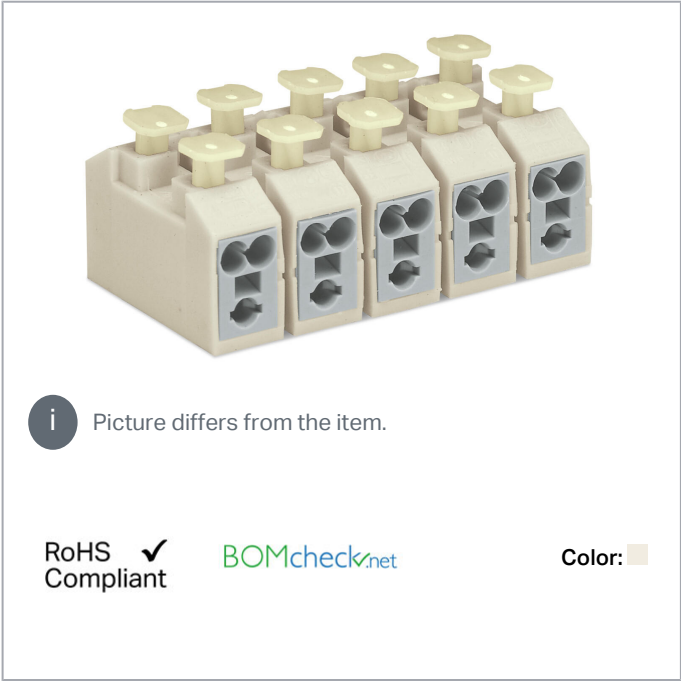

 Picture differs from the item.

RoHS  

Color: 

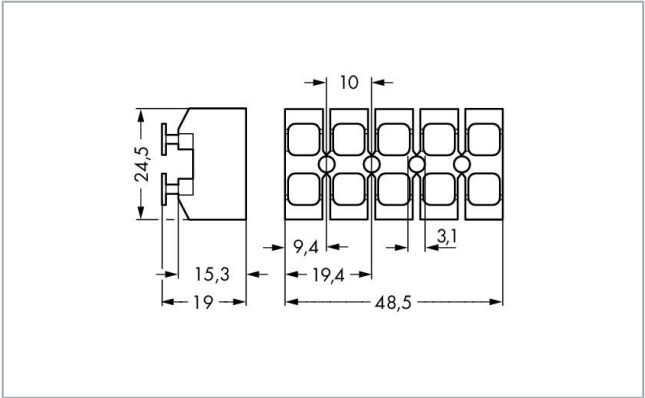

**Data**  
**Electrical data**

**Ratings per IEC/EN**

Ratings per	IEC/EN 60664-1
Rated voltage (III/2)	400 V
Rated surge voltage (III/2)	4 kV
Rated current	18 A
Legend (ratings)	(III / 2) ≙ Overvoltage category III / Pollution degree 2

**Ratings per UL**

Approvals per	UL 1059
---------------	---------

**Ratings per CSA**

Approvals per	CSA
---------------	-----

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Connection data

Connection technology	PUSH WIRE®
Solid conductor	0.5 ... 1.5 mm² / 20 ... 16 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inch
Pole No.	2
Solid conductor 2	0.5 ... 2.5 mm² / 20 ... 14 AWG
Total number of connection points	8
Total number of potentials	2
Number of connection types	1

## Physical data

Width	18.5 mm / 0.728 inch
Height	19 mm / 0.748 inch
Depth	24.5 mm / 0.965 inch

## Material data


Color	white
Fire load	0.107 MJ
Weight	6.2 g

## Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
Packaging type	bag
Country of origin	PL
GTIN	4044918397094
Customs tariff number	85369010000

## Approvals / Certificates

### Country specific Approvals


Logo	Approval	Additional Approval Text	Certificate name
	CSA DEKRA Certification B.V.	C22.2 No. 158	70048844

### UL-Approvals

Subject to changes. Please also observe the further product documentation!


WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.




Logo	Approval	Additional Approval Text	Certificate name
	UR Underwriters Laboratories Inc.	UL 1059	20190731-E45172

## Compatible products

### tools

	Item no.: 249-100 Operating tool; for terminal blocks with snap-in ground contact	<a href="http://www.wago.com/249-100">www.wago.com/249-100</a>
--	--	--

### assembling

	Item no.: 271-702 Pins; for plate thickness 1 mm	<a href="http://www.wago.com/271-702">www.wago.com/271-702</a>
	Item no.: 271-711 Pins; for plate thickness 1 mm	<a href="http://www.wago.com/271-711">www.wago.com/271-711</a>
	Item no.: 271-712 Pins; for plate thickness 1.5 mm	<a href="http://www.wago.com/271-712">www.wago.com/271-712</a>

## Downloads

### Documentation

#### Additional Information

Technical explanations	3. 4. 2019	pdf 2.0 MB	Download
------------------------	------------	---------------	----------

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 272-302	URL	Download
Power supply connector; push-button on both sides; without snap-in mounting feet; without ground contact; 2-pole		

## Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.