

Data sheet

739-308

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE
PIN SPACING 3.5 MM / 0.138 IN FRONT-ENTRY CAGE CLAMP CONNECTION**



Technical data

Package size 160 4*40 pieces.

| | |
|---------------------------------------|----------------------|
| Pin spacing from | 3.5 mm |
| Pin spacing from | 0.138 in |
| pole count | 8 |
| Cross section from [mm ²] | 0.08 mm ² |
| Cross section to [mm ²] | 1.5 mm ² |
| Cross section from [AWG] | 28 AWG |
| Cross section to [AWG] | 14 AWG |
| Voltage UL | 300 V |
| Measured voltage EN | 250 V |
| Measured shock voltage | 2.5 kV |
| Pollution degree | 2 |
| Current intensity EN | 6 A |
| Current UL | 6 A |
| Weight | 5.1 g |
| Color | grey |
| Wiring type | Front-entry |
| No. of connection Points | 8 |
| No. of potentials | 8 |
| Height | 12.3 mm |
| Height | 0.184 in |
| Width | 29.5 mm |
| Width | 1.161 in |
| Depth | 13.4 mm |

Data sheet

739-308

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE
PIN SPACING 3.5 MM / 0.138 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

| | |
|-------------------|----------|
| Depth | 0.528 in |
| Strip length from | 5 mm |
| Strip length to | 6 mm |
| Strip length | 0.22 in |

Data sheet

739-308

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE
PIN SPACING 3.5 MM / 0.138 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

| Approval | Voltage | Current | Approval number | Notes |
|----------|---------|---------|-----------------|-------|
| DEMKO | 250 | 6 | 99-04230 | |
| DEMKO | 250 | 6 | DK99-04230 | |
| RMR | 250 | 6 | 99.00007.250 | |
| UL | 300 | 6 | E45172 | |

Data sheet

739-308

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE
PIN SPACING 3.5 MM / 0.138 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

Accessories**Item number**

SCREWDRIVER Type 1, bar (2,5 x 0,4) mm

210-119

SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 1, bar (2,5 x 0,4) mm

210-619


SELF-ADHESIVE MARKER STRIPS HEIGHT OF MARKER STRIP 3 MM

709-179

Data sheet

739-308

PCB TERMINAL STRIP 1 SOLDER PIN / POLE PIN SPACING 3.5 MM / 0.138 IN FRONT-ENTRY CAGE CLAMP CONNECTION

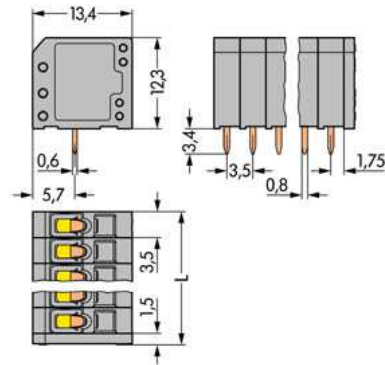

Data sheet

739-308

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE
PIN SPACING 3.5 MM / 0.138 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

Diameter of drilled hole: 1,1^{+0,1} mm

L = (No.of poles x pin spacing) + 1,5 mm