

Front connection module - ME PLC 40 CT20 GY7035 - 2201493

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Connection technology carrier, fully assembled with FKCN 2x 10-pos., cover and release lever, incl. fitted cover, corresponding header: 1x CCDN 2,5/10-G1 P26 THR (1734355)


Your advantages

- ✓ Item is from the ME PLC product range
- ✓ Tool-free mounting
- ✓ Available in 40 mm overall width
- ✓ Inflammability class V0 according to UL 94
- ✓ Variety of connection technologies
- ✓ Can be mounted on the DIN rail
- ✓ Optional with bus connector for DIN rail mounting

RoHS

IP20

Key Commercial Data

| | |
|--------------------------------------|---|
| Packing unit | 1 pc |
| Minimum order quantity | 10 pc |
| GTIN |  4 046356 838610 |
| GTIN | 4046356838610 |
| Weight per Piece (excluding packing) | 100.000 g |
| Custom tariff number | 85366990 |
| Country of origin | Germany |

Technical data

Item properties

| | |
|---------------------------|-------------------------|
| Brief article description | Front connection module |
| Type | ME PLC 40 CT20 GY7035 |

Front connection module - ME PLC 40 CT20 GY7035 - 2201493

Technical data

Item properties

| | |
|------------------------------|--|
| Order No. | 2201493 |
| Housing type | DIN rail housing |
| Type | Set consisting of upper housing part and connection technology |
| Max. IP code to attain | IP20 |
| Mounting type | Latching with lower housing part |
| Ventilation openings present | no |
| Max. number of positions | 20 (pitch: 5 mm) |

Dimensions

| | |
|--------------|----------|
| Width [w] | 39.43 mm |
| Height [h] | 128 mm |
| Depth [d] | 44.4 mm |

Material data

| | |
|--|-------------------|
| Color (RAL) | light gray (7035) |
| Flammability rating according to UL 94 | V0 |
| Housing material | Polycarbonate |

Ambient conditions

| | |
|---|--|
| Ambient temperature (storage/transport) | -40 °C ... 70 °C |
| Ambient temperature (assembly) | -5 °C ... 100 °C |
| Ambient temperature (operation) | -40 °C ... 105 °C (depending on power dissipation) |
| Relative humidity (storage/transport) | 95 % |

PCB data

| | |
|-------------------|--------------------------------|
| Mounting position | Vertical (horizontal DIN rail) |
|-------------------|--------------------------------|

General information

| | |
|--------------|---|
| Type of note | Assembly instruction: |
| Note | Refer to the data sheet for the range in the download area. |

Packaging information

| | |
|----------------------------|---------------------|
| Type of packaging | packed in cardboard |
| Pieces per package | 10 |
| Denomination packing units | Pcs. |
| Outer packaging type | Carton |

Standards and regulations

| | |
|--|----|
| Flammability rating according to UL 94 | V0 |
|--|----|

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|------------|---|

Front connection module - ME PLC 40 CT20 GY7035 - 2201493


Technical data

Environmental Product Compliance

| | |
|--|--|
| | No hazardous substances above threshold values |
|--|--|

Drawings

Dimensional drawing

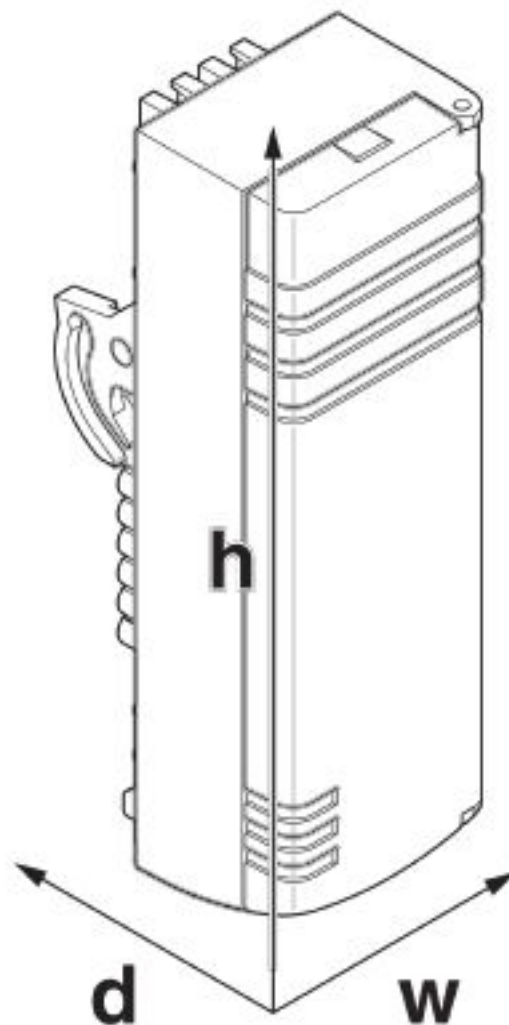

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27180400 |
|------------|----------|

Front connection module - ME PLC 40 CT20 GY7035 - 2201493

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.1 | 27180400 |
| eCl@ss 5.0 | 27180500 |
| eCl@ss 5.1 | 27180500 |
| eCl@ss 6.0 | 27180800 |
| eCl@ss 7.0 | 27182702 |
| eCl@ss 8.0 | 27182702 |
| eCl@ss 9.0 | 27182702 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC001031 |
| ETIM 4.0 | EC001031 |
| ETIM 5.0 | EC001031 |
| ETIM 6.0 | EC001031 |
| ETIM 7.0 | EC001031 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31261501 |
| UNSPSC 7.0901 | 31261501 |
| UNSPSC 11 | 31261501 |
| UNSPSC 12.01 | 31261501 |
| UNSPSC 13.2 | 31261501 |
| UNSPSC 18.0 | 31261501 |
| UNSPSC 19.0 | 31261501 |
| UNSPSC 20.0 | 31261501 |
| UNSPSC 21.0 | 31261501 |

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

Front connection module - ME PLC 40 CT20 GY7035 - 2201493

Approvals

EAC



B.01742