
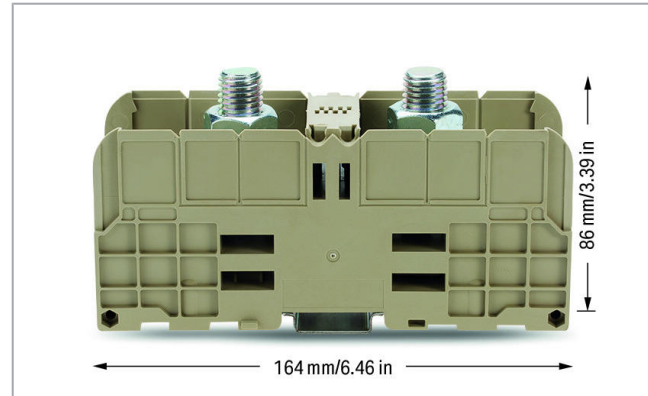


## Data sheet | Item number: 884-3000

Stud terminal block; 300 mm<sup>2</sup>; with 2 stud bolts M16; 300,00 mm<sup>2</sup>; beige

[www.wago.com/884-3000](http://www.wago.com/884-3000)

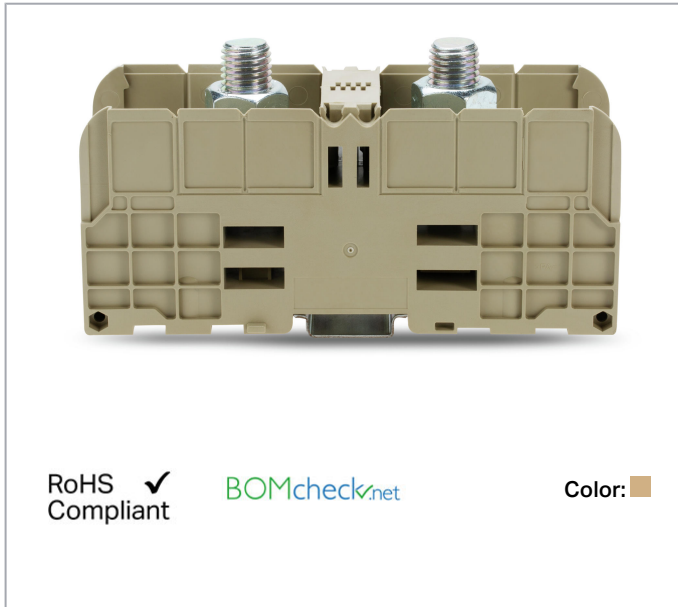

### Data

#### Electrical data

#### Ratings per IEC/EN

Nominal voltage (III/3)	1000 V
Rated surge voltage (III/3)	8 kV
Rated current	520 A
Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3

#### Ratings per UL

Approvals per	UL 1059
Rated voltage UL (Use Group B)	1000 V
Rated current UL (Use Group B)	420 A
Rated current UL (Use Group B), factory wiring only	510 A
Rated voltage UL (Use Group C)	1000 V
Rated current UL (Use Group C)	420 A
Rated current UL (Use Group C), factory wiring only	510 A

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Ratings per CSA

Approvals per	C22.2 No 158
Rated voltage CSA (Use Group B)	1000 V
Rated current CSA (Use Group B)	510 A
Rated voltage CSA (Use Group C)	1000 V
Rated current CSA (Use Group C)	510 A

## Connection data

Connection technology	Bolt-type connection
Actuation type	Open-end, ring, socket wrench; 24 mm
Connectable conductor materials	Copper
Nominal cross-section	300 mm <sup>2</sup>
Total number of connection points	2
Total number of potentials	1
Number of levels	1
Connection position	top
Clamping range	25 ... 300 mm <sup>2</sup> / 6 AWG ... 600 kcmil
Type of cable lugs according to DIN 46234	Cable lugs for solder-free connections Ring type, without insulating sleeve, for copper conductors
DIN46234: 1 cable lug per side	25 ... 240 mm <sup>2</sup>
DIN 46234: 2 cable lugs per side	50 ... 240 mm <sup>2</sup>
Type of cable lugs according to DIN 46235	Cable lugs for compression connections Cover plate type for copper conductors
DIN46235: 1 cable lug per side	50 ... 300 mm <sup>2</sup>
DIN 46235: 2 cable lugs per side	50 ... 240 mm <sup>2</sup>
Bolt thread	M16

## Physical data

Width	55 mm / 2.165 inch
Height	164 mm / 6.457 inch

## Mechanical data

Tightening torque	25 ... 60 Nm
Mounting type	DIN-35 rail Panel mounting

Subject to changes. Please also observe the further product documentation!

## Material data

Color	beige
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Weight	510 g

## Environmental requirements









Continuous operating temperature	-40 ... +120 °C
----------------------------------	-----------------

## Commercial data















Packaging type	BOX
Country of origin	DE
GTIN	4055143941952
Customs tariff number	85369095000

## Compatible products

### Carrier rail

	<b>Item no.: 210-112</b> Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; <a href="http://www.wago.com/210-112">www.wago.com/210-112</a> silver-colored
	<b>Item no.: 210-113</b> Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored <a href="http://www.wago.com/210-113">www.wago.com/210-113</a>
	<b>Item no.: 210-114</b> Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored <a href="http://www.wago.com/210-114">www.wago.com/210-114</a>
	<b>Item no.: 210-115</b> Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; <a href="http://www.wago.com/210-115">www.wago.com/210-115</a> silver-colored
	<b>Item no.: 210-118</b> Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored <a href="http://www.wago.com/210-118">www.wago.com/210-118</a>
	<b>Item no.: 210-197</b> Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored <a href="http://www.wago.com/210-197">www.wago.com/210-197</a>
	<b>Item no.: 210-198</b> Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored <a href="http://www.wago.com/210-198">www.wago.com/210-198</a>
	<b>Item no.: 210-504</b> Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored <a href="http://www.wago.com/210-504">www.wago.com/210-504</a>

Subject to changes. Please also observe the further product documentation!

	<p><b>Item no.: 210-505</b> Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored</p>	<a href="http://www.wago.com/210-505">www.wago.com/210-505</a>
	<p><b>Item no.: 210-506</b> Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored</p>	<a href="http://www.wago.com/210-506">www.wago.com/210-506</a>
	<p><b>Item no.: 210-508</b> Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored</p>	<a href="http://www.wago.com/210-508">www.wago.com/210-508</a>
<b>Marking accessories</b>		
	<p><b>Item no.: 2009-115</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white</p>	<a href="http://www.wago.com/2009-115">www.wago.com/2009-115</a>
	<p><b>Item no.: 2009-115/000-002</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow</p>	<a href="http://www.wago.com/2009-115/000-002">www.wago.com/2009-115/000-002</a>
	<p><b>Item no.: 2009-115/000-005</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red</p>	<a href="http://www.wago.com/2009-115/000-005">www.wago.com/2009-115/000-005</a>
	<p><b>Item no.: 2009-115/000-006</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue</p>	<a href="http://www.wago.com/2009-115/000-006">www.wago.com/2009-115/000-006</a>
	<p><b>Item no.: 2009-115/000-007</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray</p>	<a href="http://www.wago.com/2009-115/000-007">www.wago.com/2009-115/000-007</a>
	<p><b>Item no.: 2009-115/000-012</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange</p>	<a href="http://www.wago.com/2009-115/000-012">www.wago.com/2009-115/000-012</a>
	<p><b>Item no.: 2009-115/000-017</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green</p>	<a href="http://www.wago.com/2009-115/000-017">www.wago.com/2009-115/000-017</a>
	<p><b>Item no.: 2009-115/000-023</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green</p>	<a href="http://www.wago.com/2009-115/000-023">www.wago.com/2009-115/000-023</a>
	<p><b>Item no.: 2009-115/000-024</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet</p>	<a href="http://www.wago.com/2009-115/000-024">www.wago.com/2009-115/000-024</a>
	<p><b>Item no.: 793-501</b> WMB marking card; as card; not stretchable; plain; snap-on type; white</p>	<a href="http://www.wago.com/793-501">www.wago.com/793-501</a>
	<p><b>Item no.: 793-501/000-002</b> WMB marking card; as card; not stretchable; plain; snap-on type; yellow</p>	<a href="http://www.wago.com/793-501/000-002">www.wago.com/793-501/000-002</a>

Subject to changes. Please also observe the further product documentation!



**Item no.: 793-501/000-005**  
WMB marking card; as card; not stretchable; plain; snap-on type; red

[www.wago.com/793-501/000-005](http://www.wago.com/793-501/000-005)



**Item no.: 793-501/000-006**  
WMB marking card; as card; not stretchable; plain; snap-on type; blue

[www.wago.com/793-501/000-006](http://www.wago.com/793-501/000-006)



**Item no.: 793-501/000-007**  
WMB marking card; as card; not stretchable; plain; snap-on type; gray

[www.wago.com/793-501/000-007](http://www.wago.com/793-501/000-007)



**Item no.: 793-501/000-012**  
WMB marking card; as card; not stretchable; plain; snap-on type; orange

[www.wago.com/793-501/000-012](http://www.wago.com/793-501/000-012)



**Item no.: 793-501/000-017**  
WMB marking card; as card; not stretchable; plain; snap-on type; light green

[www.wago.com/793-501/000-017](http://www.wago.com/793-501/000-017)



**Item no.: 793-501/000-023**  
WMB marking card; as card; not stretchable; plain; snap-on type; green

[www.wago.com/793-501/000-023](http://www.wago.com/793-501/000-023)



**Item no.: 793-501/000-024**  
WMB marking card; as card; not stretchable; plain; snap-on type; violet

[www.wago.com/793-501/000-024](http://www.wago.com/793-501/000-024)



**Item no.: 793-5501**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/793-5501](http://www.wago.com/793-5501)



**Item no.: 793-5501/000-002**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

[www.wago.com/793-5501/000-002](http://www.wago.com/793-5501/000-002)



**Item no.: 793-5501/000-005**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red

[www.wago.com/793-5501/000-005](http://www.wago.com/793-5501/000-005)



**Item no.: 793-5501/000-006**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue

[www.wago.com/793-5501/000-006](http://www.wago.com/793-5501/000-006)



**Item no.: 793-5501/000-007**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray

[www.wago.com/793-5501/000-007](http://www.wago.com/793-5501/000-007)



**Item no.: 793-5501/000-012**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange

[www.wago.com/793-5501/000-012](http://www.wago.com/793-5501/000-012)

**Item no.: 793-5501/000-014**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on

Subject to changes. Please also observe the further product documentation!



type; brown

[www.wago.com/793-5501/000-014](http://www.wago.com/793-5501/000-014)



**Item no.: 793-5501/000-017**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green

[www.wago.com/793-5501/000-017](http://www.wago.com/793-5501/000-017)



**Item no.: 793-5501/000-023**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green

[www.wago.com/793-5501/000-023](http://www.wago.com/793-5501/000-023)



**Item no.: 793-5501/000-024**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet

[www.wago.com/793-5501/000-024](http://www.wago.com/793-5501/000-024)

### Jumper



**Item no.: 884-3042**

Jumper; for M16 stud bolts; 2-way; unplated; white

[www.wago.com/884-3042](http://www.wago.com/884-3042)



**Item no.: 884-3043**

Jumper; for M16 stud bolts; 3-way; unplated; silver-colored

[www.wago.com/884-3043](http://www.wago.com/884-3043)

### assembling



**Item no.: 249-117**

Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

[www.wago.com/249-117](http://www.wago.com/249-117)



**Item no.: 249-197**

Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

[www.wago.com/249-197](http://www.wago.com/249-197)



**Item no.: 884-3080**

Cover; for stud terminal block; 185 and 300 mm<sup>2</sup>; beige

[www.wago.com/884-3080](http://www.wago.com/884-3080)



**Item no.: 884-3084**

Cover; for stud terminal block; 185 and 300 mm<sup>2</sup>; blue

[www.wago.com/884-3084](http://www.wago.com/884-3084)



**Item no.: 884-3086**

Cover; for stud terminal block; 185 and 300 mm<sup>2</sup>; yellow

[www.wago.com/884-3086](http://www.wago.com/884-3086)

## Downloads

### Documentation

#### Additional Information

Technical explanations

3. 4. 2019

pdf  
2.2 MB

Download

## CAD/CAE-Data

### CAD data

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

2D/3D Models 884-3000

[URL](#)

[Download](#)

#### CAE data

ZUKEN Portal 884-3000

[URL](#)

[Download](#)

### Environmental Product Compliance

#### Compliance Search


Environmental Product Compliance 884-3000

[URL](#)

[Download](#)

Stud terminal block; 300 mm<sup>2</sup>; with 2 stud bolts M16; 300,00 mm<sup>2</sup>; beige

### Installation Notes

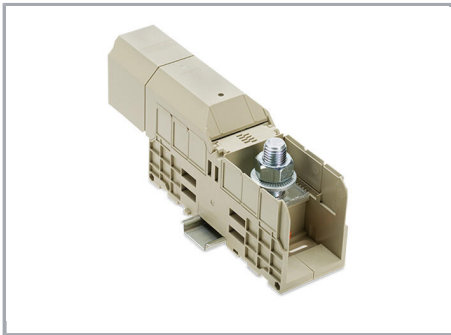

#### Conductor termination


Subject to changes. Please also observe the further product documentation!



### Anschluss von zwei Kabelschuhen an einen Gewindebolzen

Es ist möglich, bis zu zwei Kabelschuhe an einem Gewindebolzen anzuschließen. Dafür werden die Kabelschuhe mit den Rückseiten zueinander auf den Bolzen gesetzt. Anschließend wird die Sechskant-Kombimutter mit dem erforderlichen Drehmoment angezogen, sodass sich die Laschen der Kabelschuhe gegeneinanderpressen und sicher mit der Stromschiene kontaktiert werden.

### Commoning

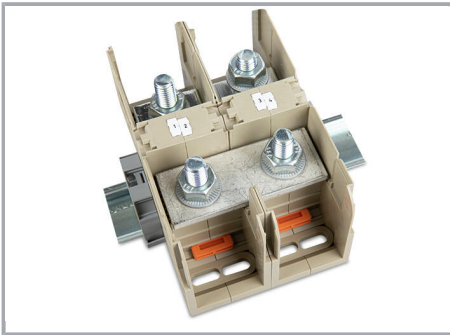


### Brücken

Schritt 1: Die inneren Trennwände neben den Gewindebolzen entfernen.  
Schritt 2: Den 2- oder 3-fach-Brücker auf die zu verbindenden Gewindebolzen auflegen.  
Schritt 3: Die Sechskant-Kombimuttern mit dem erforderlichen Drehmoment anziehen.  
Achtung: Die Brücker werden unter dem anzuschließenden Ringkabelschuh positioniert.  
Die Brücker sind für den Bemessungsstrom der jeweiligen Bolzenklemme ausgelegt.

Subject to changes. Please also observe the further product documentation!



### Cover

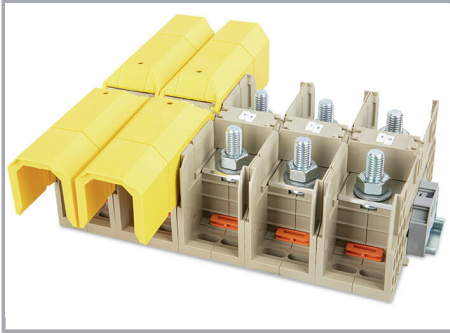

### Abdeckprofil:

Die Abdeckprofile werden in die vorgesehenen Rastelemente der Bolzenklemme von oben aufgerastet. Es besteht die Möglichkeit, die Abdeckprofile mit einem Schneidwerkzeug zu kürzen. Die Abdeckprofile lassen sich ein- oder beidseitig montieren und gewährleisten einen zuverlässigen Berührungsschutz.

### Testing




### Prüfen

Spannungsmessungen lassen sich direkt an den Gewindebolzen durchführen. Durch die vorgesehenen Prüföffnungen werden Spannungsmessungen auch mit montierten Warnabdeckungen ermöglicht.

### Marking

Subject to changes. Please also observe the further product documentation!

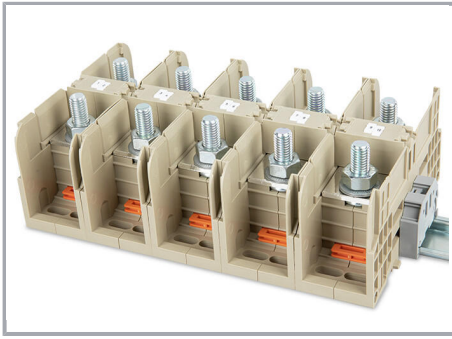

### Beschriftung

Die Bolzenklemmen lassen sich schnell und einfach mit dem Beschriftungssystem WMB Inline beschriften. Die Schilder werden in die dafür vorgesehenen Aufnahmen eingesetzt. Beschriftungsstreifen werden mithilfe der Beschriftungsadapter (2009-198) eingesetzt.

Subject to changes. Please also observe the further product documentation!