

## Data sheet | Item number: 858-189

Basic relay; Nominal input voltage: 230 VAC; 2 changeover contacts;  
Limiting continuous current: 12 A; with manual operation; Module width: 22  
mm



[www.wago.com/858-189](http://www.wago.com/858-189)






 Picture differs from the item.

Similar to picture

RoHS  Compliant



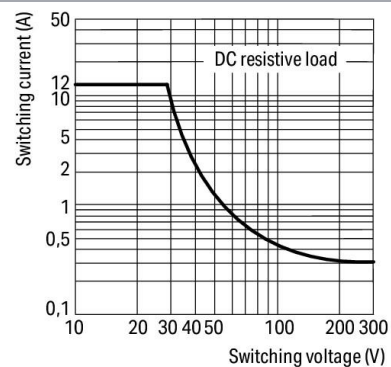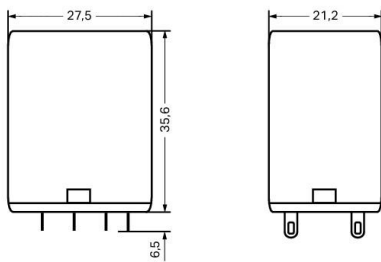

DC load limit curve

## Data

### Technical data

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



### Control circuit

Nominal input voltage $U_N$	AC 230 V
Nominal input current at $U_N$	11 mA

### Load circuit

Number of changeover/switchover contacts	2
Contact material (relay)	AgNi
Limiting continuous current	12 A
Inrush current (resistive) (max.)	(AC) 24 A / 4 s
Switching voltage (max.)	AC 250 V
Switching power (resistive) (max.)	AC 3000 VA; DC (see load limit curve)
Switching capacity	AC-15: 1.5 A / AC 240 V; DC-13: 0.1 A / DC 250 V
Recommended minimum load	10 V / 5 mA / 300 mW
Pull-in time (typ.)	10 ms
Drop-out time (typ.)	8 ms
Electrical life (NO; resistive load; 23 °C)	100 x 10 <sup>3</sup> switching operations
Mechanical life	20 x 10 <sup>6</sup> switching operations
Switching frequency with/without load (max.)	20 min <sup>-1</sup> / 200 min <sup>-1</sup>

### Signaling

Status indicator	Red LED Mechanical
------------------	-----------------------

### Safety and protection

Dielectric strength, control/load circuit (AC, 1 min)	2.5 kVrms
Dielectric strength, open contact (AC, 1 min)	1.5 kVrms
Dielectric strength, load/load circuit (AC, 1 min)	2.5 kVrms
Protection type	IP20

### Physical data

Width	21.2 mm / 0.835 inch
Height from the surface	35.6 mm / 1.402 inch
Depth	27.5 mm / 1.083 inch

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



## Mechanical data

Mounting type	Pluggable module
---------------	------------------

## Material data

Weight	31.5 g
--------	--------

## Environmental requirements

Surrounding air temperature (operation at $U_N$ )	-40 ... 55 °C
---	---------------

Surrounding air temperature (storage)	-40 ... 85 °C
---------------------------------------	---------------

## Standards and specifications

Standards/Specifications	EN 61810-1
--------------------------	------------

## Commercial data

Packaging type	BOX
----------------	-----

Country of origin	DE
-------------------	----

GTIN	4055143693264
------	---------------

Customs tariff number	85364900990
-----------------------	-------------

## Downloads

### Documentation

#### Bid Text

858-189 X81 - Datei	24. 8. 2020	xml 4.8 kB	Download
------------------------	-------------	---------------	----------

858-189 docx - Datei	24. 8. 2020	docx 14.9 kB	Download
-------------------------	-------------	-----------------	----------

#### Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf 265.8 kB	Download
--	---------	-----------------	----------

## CAD/CAE-Data

### CAE data

Subject to changes. Please also observe the further product documentation!



ZUKEN Portal 858-189

[URL](#)

[Download](#)

EPLAN Data Portal 858-189

[URL](#)

[Download](#)

#### CAD data

2D/3D Models 858-189

[URL](#)

[Download](#)

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 858-189

[URL](#)

[Download](#)

Basic relay; Nominal input voltage: 230 VAC; 2 changeover contacts; Limiting continuous current: 12 A; with manual operation; Module width: 22 mm

## Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.