

## Data sheet

721-212/026-000

**FEMALE PLUG 12 POLE**  
**100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS WITH 2 LATCHES**



## Technical data

Package size 25 pieces.

Pin spacing from	7.5 mm
Pin spacing from	0.295 in
pole count	12
Cross section from [mm <sup>2</sup> ]	0.08 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	2.5 mm <sup>2</sup>
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Voltage UL	300 V
Voltage CSA	300 V
Current UL	15 A
Current CSA	15 A
Measured voltage EN	400 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	16 A
Weight	25.3 g
Color	light grey
No. of connection Points	12
No. of potentials	12
Height	14.3 mm
Height	0.563 in
Width	89 mm
Width	3.504 in

---

**Data sheet****721-212/026-000****FEMALE PLUG 12 POLE  
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS WITH 2  
LATCHES**

---

Depth	26.45 mm
Depth	1.041 in
Strip length from	8 mm
Strip length to	9 mm
Strip length	0.33 in
xxx-xxx/035-000	Strain relief plate 50 mm
xxx-xxx/xxx-047	1-2-3-4-5-...
xxx-xxx/xxx-045	1-PE-3

## Data sheet

721-212/026-000

**FEMALE PLUG 12 POLE  
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS WITH 2  
LATCHES**

---

Approval	Voltage	Current	Approval number	Notes
BBJ	400	16	B/12/699/03	
BV	400	16	11915/A0	
CCA	400	16	DK2127	
CSA	300	15	154112-1465035	
CSM	400	16	017956	
DNV	400	16	E-6997	
GL	400	16	17296-00HH	
KEMA	400	16	98.2486.01	
KR	250/400	12/16	HMB05880-EL003	
LR	400	16	96/20035	
NEMKO	400		P94101840	
RMR	400	16	99.00007.250	
RosTesT	400	16	B09523	
UL	600	15	E45171	
UL	300	15	E45172	
VDE	400	16	5675ÜGBI.2	

## Data sheet

721-212/026-000

**FEMALE PLUG 12 POLE  
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS WITH 2  
LATCHES**

---

## Accessories


## Item number

ISULATION STOP 0.08 - 0.2 MM <sup>2</sup> / 0.2 MM <sup>2</sup> S	231-673
ISULATION STOP 0.25 - 0.5 MM <sup>2</sup>	231-674
ISULATION STOP 0.75 - 1 MM <sup>2</sup>	231-675
LOCKOUT CAPS FOE COVERING UNUSED CLAMPING UNITS	231-668
OPERATING STICKER FOR MULTI CONNECTION SYSTEM	210-199
OPERATING TOOL FOR FEMALE AND MALE CONNECTORS WITH CAGE CLAMP	210-250
PUSH BUTTON FOR FEMALE CONNECTORS AND MALE CONNECTORS	231-131
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-257
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-258
SCREWDRIVER Type 2, bar (3,5 x 0,5) mm	210-120
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm	210-620
TEST PLUG 2 MM / 0.079 IN WIDE	210-136
TEST PLUG 2.3 MM / 0.091 IN WIDE	210-137
TEST PLUG FOR FEMALE PLUGS FOR PIN SPACING 7.5 MM 7 0.295 IN AND 7.62 MM / 0.3 IN	231-662

## Data sheet

721-212/026-000

**FEMALE PLUG 12 POLE**  
**100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS WITH 2 LATCHES**

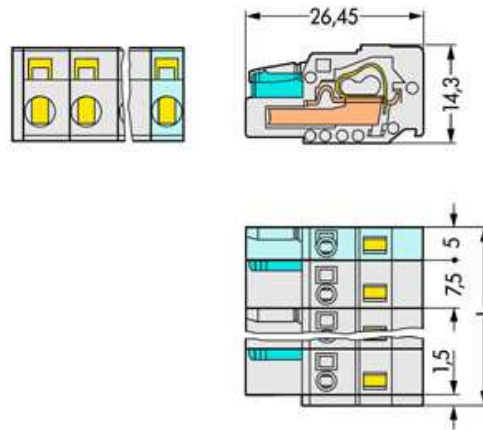

---

Data sheet

721-212/026-000

**FEMALE PLUG 12 POLE  
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS WITH 2  
LATCHES**

---

$L = (\text{No. of poles} - 1) \times \text{pin spacing} + 5 \text{ mm} + 1,5 \text{ mm}$