


Recommended P.C.B Layout

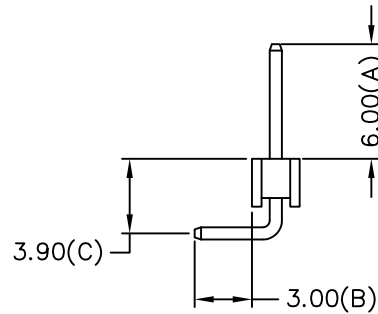

MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP  
 Insulation Resistance : 5000MΩMin. at DC 500V  
 Contact Resistance : 20mΩMax. at DC 100mA  
 Dielectric Voltage : AC 500V for one minute

211-9 1- xx G B 01  
 1 2 3 4 5

- 1. 1: Single row
- 2: Dual rows
- 2. No. of contacts per row
- 3. G: Gold flash
- S: Selective
- T: Tin plated
- 4. B: Black Insulator
- W: White Insulator
- 5. Pinrex internal code.

POLES	DIM E	POLES	DIM E
		21	50.80
2	2.54	22	53.34
3	5.08	23	55.88
4	7.62	24	58.42
5	10.16	25	60.96
6	12.70	26	63.50
7	15.24	27	66.04
8	17.78	28	68.58
9	20.32	29	71.12
10	22.86	30	73.66
11	25.40	31	76.20
12	27.94	32	78.74
13	30.48	33	81.28
14	33.02	34	83.82
15	35.56	35	86.36
16	38.10	36	88.90
17	40.64	37	91.44
18	43.18	38	93.98
19	45.72	39	96.52
20	48.26	40	99.06



		TOLERANCE		UNITS : mm		OLD PART NO.		TITLE		頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.	
		.0 =±.30		SCALE NONE		DRAWER 楊海琴		PIN HEADER 2.54*2.54mm		DRAW NO. 211-91-xxGB01	
		.00 =±.20		SIZE A4		CHECK 李劍		RIGHT ANGLE TYPE, SINGLE ROW			
		.000 =±.XXX		SHEET 1 OF 1		APP'D 李劍		NEW PART NO. 211-91-xxGB01			
B		.0000=±.		REV. A							
A		ANG.=±3'									
REV.		DESCRIPTION		DATE							
				2018/05/10							