

SKINDICHT® KW-M

SKINDICHT® KW-M, metric, glass fibre-reinforced polyamide angle cable gland to decrease in installation height, space- and weight-saving




Low weight



Space requirement



Connector with standard housing unit

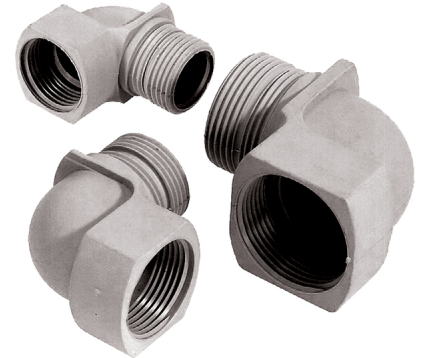

Application range

Angled glands are used in areas where cables have to run in parallel to the housing wall.
Light and sound applications
Control cabinet manufacturing

Benefits

Space- and weight-saving application due to thin cable diameters
Decrease in installation height

Product Make-up

Metric connection thread acc. to DIN EN 60423
Basis for technical information EN 50262

Note

Refer to SKINDICHT® O-ring Perbunan® for suitable O-rings
SKINDICHT® KW-M can be combined with any cable gland, in particular with SKINTOP® ST-M
Counter nut to be used: SKINTOP® GMP-GL-M
In combination with SKINTOP® ST-M the degree of protection is IP 68 (acc. technical description)

Technical Data

Classification:	ETIM 5.0 Class-ID: EC000441 ETIM 5.0 Class-Description: Cable screw gland
Colour delivered:	Silver grey (RAL 7001)
Material:	Polyamide, glass fibre-reinforced
Protection rating:	IP 55
Temperature range:	-20°C to +80°C

Note

Perbunan® is a registered trademark of BAYER AG
Photographs are not to scale and do not represent detailed images of the respective products.



SKINDICHT® KW-M

Part number	Article designation / size	A (mm)	B in mm	Ø E mm	SW wrench size mm	Overall length/ C (mm)	Thread length/ D (mm)
SKINDICHT® KW-M							
52106210	16 x 1,5	19.0	21.5	11	19	24.0	13.0
52106220	20 x 1,5	25.0	24.5	15	25	29,5	15.0
52106230	25 x 1,5	30.0	28.0	20	30	33,5	16.0
52106240	32 x 1,5	36.0	31.5	26	36	38.0	17.0

SKINDICHT® KW-M

