

EC4-10-ETO

Industrial Ethylene Oxide Sensor (Application : Portable Gas Detectors)

PERFORMANCE

Range	0 – 10 ppm
Sensitivity	1.9 ± 0.8 µA/ppm
Zero in Air at 20°C	-0.2 to 2.5 μA
Baseline Drift	0 to 2 ppm equivalent
Resolution	0.1 ppm
Linearity	Linear Across Range
Response time (T ₉₀)	< 120 seconds
Long-term Output Drift	< 2% signal/month
Warranty	2 years
Bias	+ 300mV

OPERATING CONDITIONS

Temperature Range	-20°C to +50°C
Operating Humidity	15 – 90% RH (non-condensing)
Pressure range	90 to 110 kPa
Operating Circuit	See Application Note 2
Recommended Storage Temperature	0°C to 20°C
Storage life	6 months in original packing (0 – 25°C)
Expected Operating Life	3 years

PHYSICAL CHARACTERISTICS


Weight	5 g
Orientation Sensitivity	None
Dimensions	See Outline

SGX Europe Sp. z o.o. T: +48 (0) 32 438 4778 Building 11 Ligocka St. 103, 40-568 Katowice, Poland

E: sales.is@sgxsensortech.com www.sgxsensortech.com

OUTLINE

All Dimensions are in mm All tolerances are ±0.2mm

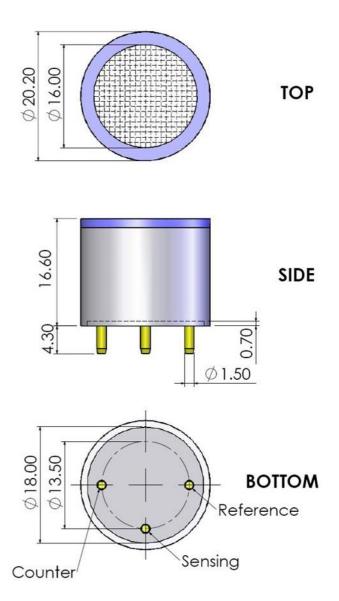

Whilst SGX has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. SGX accepts no liability beyond the set out in its standard conditions of sale in respect of infringement of third party patents arising from the use of SGX products in accordance with information contained herein. In case of modification of the product, SGX disclaims all liability.



SGX Europe Sp. z o.o. Building 11 Ligocka St. 103, 40-568 Katowice, Poland

T: +48 (0) 32 438 4778

E: sales.is@sgxsensortech.com www.sgxsensortech.com

CROSS-SENSITIVITY DATA

GAS	RANGE (ppm)	CORRECTION FACTOR TO ETO *
Ethylene Oxide	10	1.0
Carbon Monoxide	100	2.5
Ethanol	30	0.8
Methanol	10	0.3
Isopropanol	50	1.3
Formaldehyde	10	0.4
i-Butylene	30	0.9
Butadiene	10	0.3
Ethylene	30	0.7
Propene	30	0.8
Vinyl Chloride	30	1.3
Vinyl Acetate	30	0.5
Formic Acid	50	1.4
Acrylonitrile	100	2.5

* See Important Notes

IMPORTANT NOTES

- 1.) Do not solder to the connector pins as this may damage the sensor and thereby invalidate the warranty.
- 2.) Details on recommended connector pins can be found in the Frequently Asked Questions within the Gas Sensor section of the SGX website.
- 3.) All performance specifications are based upon the following environmental conditions: 20°C, 50% relative humidity, 101kPa.
- 4.) Cross Sensitivity Data is for information only. Calibration is recommended with target gas as the accuracy of calibration and measurement cannot be ensured.
- 5.) Correction Factor of ETO = Sensitivity of ETO / Sensitivity of test gas.
- 6.) The cross sensitivities are including but not limited to the gases stated in the table. It may respond to other gases.
- 7.) The cross sensitivities may fluctuate between \pm 30% and may differ from batch to batch or across sensor's life time.
- 8.) The device is designed to be RoHS compliant.




SGX Europe Sp. z o.o. Building 11 Ligocka St. 103, 40-568 Katowice, Poland

T: +48 (0) 32 438 4778

E: sales.is@sgxsensortech.com www.sgxsensortech.com

TEMPERATURE PERFORMANCE

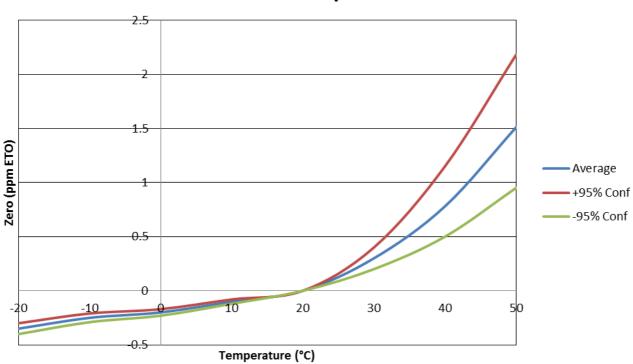

Zero V's Temperature



